


# 磁铁

## 螺栓固定型




代码	类型	磁力方向	材质	表面处理	耐热温度	颜色	磁极		附件
							表面	反面	
BLS65	螺栓固定型	轴向	钕磁铁	镀镍	80°C	银白色	S	N	不锈钢内六角沉头螺钉 1个
BLS66							N	S	
BLS67	方型	轴向	钕磁铁	镀镍	150°C	银白色	N	S	
BLS68							S	N	
BLS70	螺栓固定型	轴向	钕磁铁	镀镍	80°C	银白色	S	N	
BLS71							N	S	
BLS72	方型	轴向	钕磁铁	镀镍	150°C	银白色	N	S	
BLS73							S	N	



磁力方向：轴向

圆型  
BLS65/66/67/68

方型  
BLS70/71/72/73

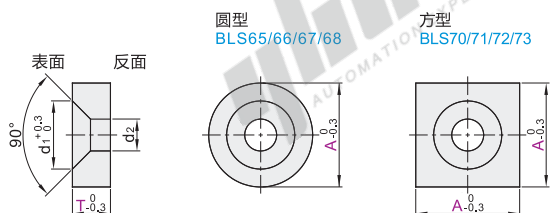

### 圆型

代码	型号	A	T	d1	d2	附件	紧固扭矩 (N·m)	吸引力N(kgf)		表面磁通密度高斯(G)	
								BLS65/66	BLS67/68	BLS65/66	BLS67/68
BLS65 BLS66 BLS67 BLS68	8	2	3	5.5	3.0	M2.5-L6	0.5	7.8 (0.8)	7.8 (0.8)	1900~2500	2000~2500
			4					10.8 (1.1)	10.8 (1.1)	2300~2800	2400~2800
			3					12.5 (1.27)	—	2500~3000	—
	10	4	6.5	3.5	M3-L8	1.5	14.7 (1.5)	14.7 (1.5)	3400~4000	3500~4000	
							4	18.6 (1.9)	18.6 (1.9)	3900~4200	4000~4200
							5	21.5 (2.19)	—	4000~4400	—
	12	3	6.5	3.5	M3-L8	1.5	18.6 (1.9)	18.6 (1.9)	3500~4000	3600~4000	
							4	21.0 (2.14)	—	3800~4200	—
							4.5	23.5 (2.4)	23.5 (2.4)	4000~4300	4100~4300
	15	6	9	4.8	M4-L10	3.6	30.4 (3.1)	—	4200~4700	—	
							3	23.5 (2.4)	23.5 (2.4)	3400~3700	3200~3500
							4	31.3 (3.19)	—	3900~4300	—
20	5	11	5.8	M5-L12	7.6	41.1 (4.2)	41.1 (4.2)	4100~4500	4200~4500		
						4	49.0 (5.0)	49.0 (5.0)	3700~4100	3800~4200	
						5.5	54.8 (5.6)	54.8 (5.6)	4100~4400	4200~4400	
25	6	13	7.0	M6-L16	13	58.8 (6.0)	—	4200~4500	—		
						4	58.8 (6.0)	—	3600~4100	—	
						6	78.4 (8.0)	78.4 (8.0)	4000~4400	4100~4400	

① 紧固扭矩若超出上表值，将导致磁铁开裂。

### 方型

代码	型号	A	T	d1	d2	附件	紧固扭矩 (N·m)	吸引力N(kgf)		表面磁通密度高斯(G)	
								BLS70/71	BLS72/73	BLS70/71	BLS72/73
BLS70 BLS71 BLS72 BLS73	8	2	3	5.5	3.0	M2.5-L6	0.5	10.8(1.1)	10.8(1.1)	2900~3400	2900~3200
			4*					16.6(1.7)	16.6(1.7)	3100~3600	3200~3600
			3					18.6(1.9)	—	3600~3900	—
	10	4	6.5	3.5	M3-L8	1.5	22.5(2.3)	22.5(2.3)	2900~3300	3400~3700	
							4	24.5(2.5)	24.5(2.5)	3700~4000	3800~4000
							5*	31.3(3.2)	—	4000~4300	—
	12	3	6.5	3.5	M3-L8	1.5	24.5(2.5)	24.5(2.5)	3400~3800	3200~3500	
							4.5	27.4(2.8)	27.4(2.8)	3800~4100	3900~4100
							6*	37.2(3.8)	—	4000~4300	—
	15	3	9	4.8	M4-L10	3.6	27.4(2.8)	39.2(4.0)	3300~3700	3200~3500	
							4*	43.1(4.4)	—	3500~3800	—
							5	31.3(3.2)	54.8(5.6)	3900~4300	4000~4300
20	4	11	5.8	M5-L12	7.6	33.2(3.4)	47.0(4.8)	3300~3700	2900~3200		
						5.5	44.1(4.5)	78.4(8.0)	3900~4200	4000~4200	
						6*	81.3(8.3)	—	3600~4000	—	
25	4	13	7.0	M6-L16	13	58.8(6.0)	58.8(6.0)	2800~3200	2800~3100		
						5	86.2(8.8)	86.2(8.8)	3300~3500	3300~3500	
						6	98.0(10.0)	98.0(10.0)	3800~4300	3900~4300	
30*	5	13	7.0	M6-L16	15	122.5(12.5)	—	2800~3200	—		
						6	129.4(13.2)	—	3100~3400	—	

① 带\*的规格仅适用BLS70/71。

① 紧固扭矩若超出上表值，将导致磁铁开裂。

### 圆型



代码	A	T	d1
BLS66	8	2	5.5
BLS67	8	3	5.5

BLS66 — A8 — T2



数量	1~9	10~
价格	100%	另行报价

未标价(元) ① BLS67/68/72/73



交货期  
1

① BLS66/67/71/72

### 方型

代码	A	T	d1
BLS70	8	2	5.5
BLS71	8	3	5.5

BLS70 — A8 — T2



数量	1~19	20~
价格	100%	另行报价

未标价(元) ① BLS65/66/70/71



交货期  
5

① BLS65/68/70/73