


# 免键胀套

## 薄壁型 · 开槽

代码	类型		材质	表面处理
EUX41	薄壁型	开槽	S45C	—
EUX42				喷砂镀镍

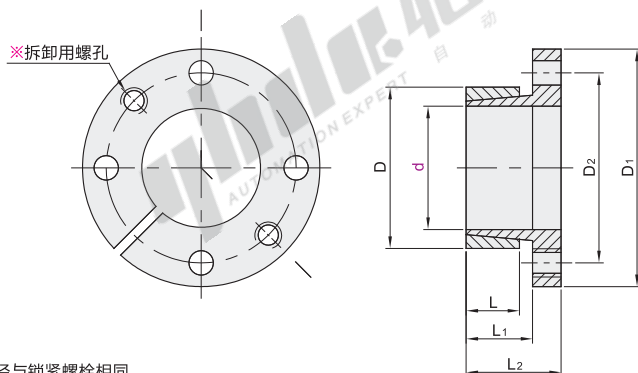

推荐安装尺寸：

轴：h8  
毂：H8

符合JB/T7934 Z14型免键胀套



视角标准：第一视角

※拆卸用螺孔的螺径与锁紧螺栓相同。  
① 此型号不含螺栓，如需要请特别提出。

型号		D	D <sub>1</sub>	D <sub>2</sub>	L	L <sub>1</sub>	L <sub>2</sub>	传递的 轴向力	传递 扭矩	接触面压强		DIN912-12.9级锁紧螺钉			
代码	d							轴	毂	数量	规格	锁紧扭矩			
								Ft(KN)	Ft(Nm)				N/mm <sup>2</sup>	N/mm <sup>2</sup>	Ts(Nm)
EUX41 EUX42	14	25	42	33				9	64	109	61		M4	2.9	
	16								73	96					
	18								82	85					
	19								87	81					
	20	30	50	39	16	20	26	15	152	127	82				
	22								167	116					
	24								182	106					
	25								190	102					
	28	36	55	45					213	91	69		M5	6	
	30								228	85					
	32								243	80					
	35	42	62	51					5	266	73	59	4		
	36									274	71				
	38									400	93				
	40	48	70	58					21	421	88	73		M6	10
	42									442	84				
	45									890	118				
	48	55	82	67						949	110	94			
	50									989	106				
	55									1088	96				
60	72	99	84						1187	88	71				
65									1286	82					



请按图示订货

型号		D
代码	d	
EUX41	14	25
EUX42	16	
EUX42	18	
EUX41—d14		



未税价(元)

优惠价

数量	1~4	5~
价格	100%	另行报价



交货期

5



Example  
使用示例

