


螺纹圆形连接器

中继型插座 防水型


代码	类型	连接方式	材质			表面处理	
			外壳	绝缘体	接触体	外壳	接触体
ZIX67	防水型 中继型 插座	螺纹连接	锌合金	热塑塑料PPS (耐高温260°C)	铜	镀铬	镀金




ZE(直式对接夹爪紧固插座)

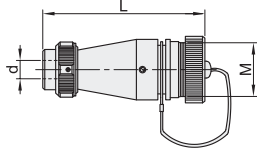

ZU(直式对接夹爪锁紧电缆插座)

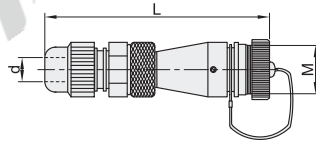

ZN(直式对接塑料软管插座)

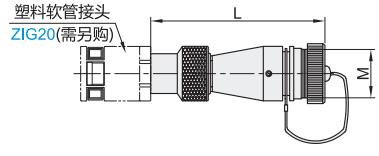

代码	型号 外壳形状	规格	芯数	端头	额定电流 (A)	工作电压 (V)	耐压 (V)	接触电阻 (MΩ)	绝缘电阻 (MΩ)	适配插头 代码	
ZIX67	ZE (直式对接夹爪紧固插座)	16	2	J(插针) K(插孔)	10	AC500	AC1500	2.5	2000	ZIX48	
			3								
			4								
		20	5		5	AC500	AC1500				
			7								
			9								
		24	10		5	AC400	AC1200				
			2								
			3								
		ZU (直式对接夹爪锁紧电缆插座)	20		4	10	AC500	AC1500			2.5
					5						
					6						
	24		7	10	AC400	AC1200	5				
			9								
			12								
	ZN (直式对接塑料软管插座)	24	10	10	AC500	AC1500	2.5				
			12								
			19								
		28	7	25	AC400	AC1200	5				
			12								
			16								
	28	17	10	AC500	AC1500	2.5					
		20									
		24									
28	24	5	AC400	AC1200	5						
	26										



型号				
代码	外壳形状	规格	芯数	端头
ZIX67	ZE	16	2	J(插针)
	ZU	3	3	K(插孔)

请按图示订货 ZIX67-ZE-16-2-J

尺寸表

外壳形状	规格	M	L	d	接头规格	管规
ZE (直式对接夹爪紧固插座)	16	M18×1	55	5~6.5		
	20	M22×1	63	9~10.5		
	24	M26×1	66.5			
	28	M30×1	70	10.5~12.5		
ZU (直式对接夹爪锁紧电缆插座)	16	M18×1	68	PG9(4~8)		
	20	M22×1	76	PG11(5~10)		
	24	M26×1	86			
	28	M30×1	90	PG16(10~14)		
ZN (直式对接塑料软管插座)	16	M18×1	54.5		PG7	1/4"
	20	M22×1	64		PG11	3/8"
	24	M26×1	67			
	28	M30×1	73		PG16	1/2"

性能表

连接方式	螺纹连接
接线方式	焊接
接插次数	500次
温度范围	-40°C~+85°C
防护等级	ZE: IP67; ZU/ZN: IP55