
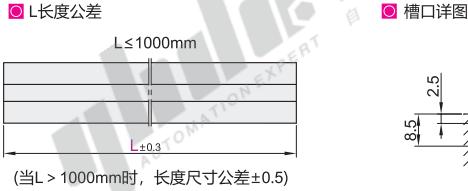


国标30系列铝合金型材(实用型)


槽宽6.3 · 边长30/60mm

代码	材质	表面处理
AGB06	A6063-T5	喷砂电泳


- ① 切断面未进行氧化处理。
- ② 最大使用长度：5800~5850mm；
整条标准长度：6000~6020mm。
- ③ 可定制表面处理。




AGB06-J1530A




AGB06-J3030Y




AGB06-J3030G




AGB06-J3060Y

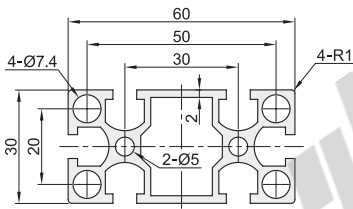

AGB06-J3060YC



AGB06-J6060Y

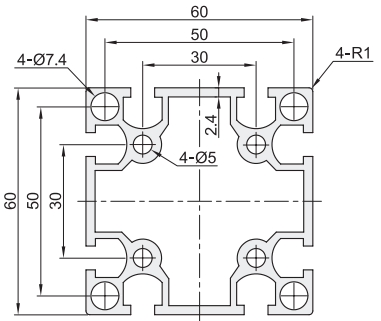

视角标准：第一视角

型号	规格	L 最小单位0.5	截面尺寸	每米重量Kg/m (理论值)	截面积 (mm ²)	截面惯性矩		抗弯截面模数	
						I_x	I_y	$W_{x\max}$ (mm ³)	$W_{y\max}$ (mm ³)
AGB06	J1530A	50~6000	15×30	0.61	221.89	0.668×10^4	1.400×10^4	890.86	933.45
	J3030Y		30×30	0.91	331.64	2.9584×10^4	2.9584×10^4	1972.31	1972.31
	J3030G		30×30	0.65	237.69	2.14×10^4	2.14×10^4	1426.86	1426.77
	J3060Y		30×60	1.53	555.51	5.4361×10^4	20.7975×10^4	3624.09	6903.19
	J3060YC		30×60	1.22	445.05	4.25×10^4	16.85×10^4	2831.70	5617.13
	J6060Y		60×60	2.43	883.16	36.8707×10^4	36.7684×10^4	12290.24	12256.15



型号		L
代码	规格	最小单位0.5
AGB06	J1530A	50~6000
	J3030Y	
AGB06 — J1530A — L50		