


代码	类型	齿距	材质		颜色	使用温度
			主体	芯线		
ECE22	MXL	2.032	橡胶	玻璃纤维线	黑色	-20~80℃
	XL	5.08				
	L	9.525				
	H	12.7				

皮带宽度公差

皮带宽度(mm)	公差
3~30	±0.5
31~50	±0.8
51~100	±1.0

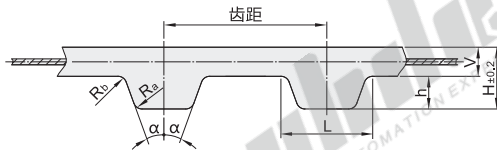

代码	齿形	齿距	2α	L	h	H	V	R _a	R _b
ECE22	MXL	2.032	40°	1.14	0.51	1.1	0.59	0.13	0.13
	XL	5.08	50°	2.57	1.27	2.25	1.0	0.38	0.38
	L	9.525	40°	4.65	1.91	3.5	1.6	0.51	0.51
	H	12.7	40°	6.12	2.29	4.3	2.0	1.00	1.00



视角标准：第一视角

ECE22-MXL(齿距: 2.032)

型号			
代码	皮带公称宽度	齿数	皮带周长
ECE22-MXL	019 (4.8mm)	52	105.66
		54	109.73
		57	115.82
		60	121.92
		63	128.02
		65	132.08
		70	142.24
		72	146.30
		75	152.40
		76	154.43
		80	162.56
		82	166.62
		83	168.66
		85	172.72
		88	178.82
		90	182.88
		94	191.01
		95	193.04
		98	199.14
		025 (6.4mm)	100
	106		215.39
	110		223.52
	112		227.58
	114		231.65
	118		239.78
	120		243.84
	125		254.00
	128		260.10
	129		262.13
	037 (9.5mm)	130	264.16
		132	268.22
		134	272.29
		142	288.54
		144	292.61
		145	294.64
		150	304.80
		155	314.96
		160	325.12
		165	335.28
	050 (12.7mm)	175	355.60
		177	359.66
		180	365.76
		195	396.24
		205	416.56
		212	430.78
		220	447.04
		221	449.07
		224	455.17
		232	471.42
		236	479.55
240		487.68	
248		503.94	
250		508.00	
256		520.19	
262		532.38	
271		550.67	
275		558.80	
280		568.96	
295		599.44	
	315	640.08	
	372	755.90	
	380	772.16	
	400	812.80	
	413	839.22	
	448	910.34	
	464	942.85	
	487	989.58	
	500	1016.00	
	516	1048.51	
	535	1087.12	