


带副唇型

代码	类型		油封		金属环	弹簧	颜色	用途	使用温度范围	使用压力范围	线速度
			材质	硬度							
XUE01	带副唇型	外周	丁腈橡胶	肖氏 HS70±5	SPCC	SW-B	黑色 棕色	轴用 旋转	-25~120℃ -10~225℃	0~0.03 MPa	10m/s 以内
XUE02		橡胶型	氟橡胶	肖氏 HS70±5							



适用标准: JIS B2402  
用途: 用于工作部位须清洁无灰尘的场合。

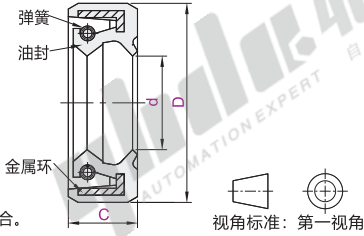

型号			
代码	d	D	C
XUE01	18	18	4
XUE02	18	18	6
XUE01-d10-D18-C4			



优惠价	
数量	价格
1~9	100%
10~	另行报价




5
---

型号	代码	d	D	C	型号	代码	d	D	C	型号	代码	d	D	C	型号	代码	d	D	C	型号	代码	d	D	C			
				4			30		8			42		7			50		10					72		10	
		18		6			31		7			43		7					11					80		12	
		7		7			32		5			45		8					7					90		10	
		19		4			35		8			47		7					8					55		8	
		7		7			36		10			50		10					10					58		7	
		20		5			37		7			52		7					11					58		8	
		22		7			40		5			40		5					12					60		7	
		25		7			42		7			42		7					8					60		9	
		25		7			40		8			42		8					10					62		8	
		22		5			42		10			45		8					12					65		10	
		24		7			47		7			46		7					12					68		10	
		25		5			45		8			47		7					8					70		10	
		26		6			47		7			47		10					12					70		10	
		28		7			50		8			48		8					10					72		10	
		30		10			52		7			48		7					12					75		8	
XUE01		24		7		XUE01		35		5		XUE01		50		8		XUE01		60		10		XUE01		70	10
		25		7		XUE02		36		7		XUE02		50		8		XUE02		62		8		XUE02		72	10
		24		7			38		8				50		10					10					75	8	
XUE02		26		6			40		5				52		8				7						80	12	
		28		7			42		7				55		10				8						85	12	
		30		10			44		8				60		12				10						90	10	
		32		7			45		10				62		7				10						100	8	
		35		10			47		7				62		8				12						60	8	
		40		7			50		10				62		10				10						62	7	
		28		5			52		8				62		8				8						65	9	
		30		7			62		10				62		10				10						65	10	
		28		4			38		7				42		8				7						68	8	
		30		6			40		8				45		8				8						70	10	
		30		10			42		7				48		7				8						72	12	
		32		7			44		8				48		8				10						75	8	
		35		10			46		10				50		10				12						80	12	
		40		7			48		7				52		8				10						85	10	
		28		5			50		8				55		10				8						90	10	
		30		6			52		7				60		12				10						100	8	
		30		5			55		8				62		10				12						60	8	
		30		6			58		10				62		8				10						62	7	
		30		7			60		12				62		10				12						65	9	
		32		7			62		7				62		8				10						65	10	
		35		10			62		10				62		10				12						68	8	
		40		7			62		10				62		10				12						70	10	
		28		4			38		7				65		12				10						72	12	
		30		5			40		8				65		12				12						75	8	
		30		6			42		8				68		10				12						80	10	
		30		7			44		10				70		10				12						80	10	

双唇型/单唇型

代码	类型		油封		金属环	弹簧	颜色	用途	使用温度范围	使用压力范围	线速度
			材质	硬度							
XUE11	双唇型	外周金属型	丁腈橡胶	肖氏 HS70±5	SPCC	SW-B	黑色	轴用 旋转	-25~120℃	0~0.03MPa	10m/s以内
XUE16		外周金属型	氟橡胶	肖氏 HS70±5							
XUE17	单唇型	外周橡胶型	氟橡胶	肖氏 HS70±5							0.1m/s以内

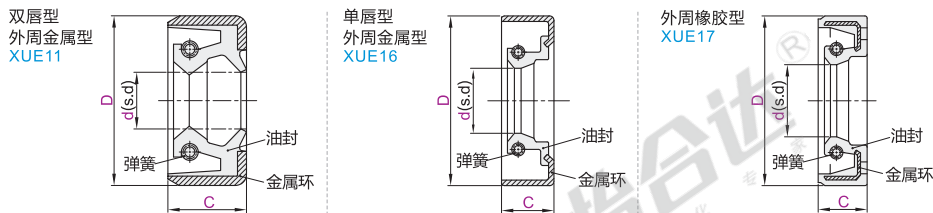

代码	型号	d	D	C
		15	25	7
		20	32	7
		25	38	±0.3
		35	50	8
		40	62	±0.4
		45	62	±0.23
		50	65	±0.13
		50	65	±0.13
		30	40	±0.20
		35	50	±0.10
		10	20	±0.10
		12	22	±0.30
		15	35	±0.15
		20	35	±0.15
		25	40	±0.3
		30	42	±0.3



型号			
代码	d	D	C
XUE11	15	25	7
	20	32	8
XUE11-d15-D25-C7			



优惠价	
数量	价格
1~9	100%
10~	另行报价



7
---