


系列	类型	接插方式	材质		
			外壳	绝缘体	接触体
WS系列	直通公插头	螺纹连接	锌基合金 (镀铬)	热塑塑料PPS (耐高温260°C)	铜 (镀金)

WEIPU 威浦电器

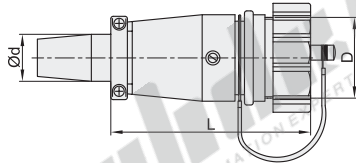


插座与面板 配合直径	16	20	24	28
D	M18×1	M22×1	M26×1	M30×1
L	44.3	48.3	53.5	56
Ød max	10	11.6	12.4	15.7


单位: mm

孔位排列图(从针的方向看)


WS16系列




WS20系列



WS24系列



WS28系列



视角标准: 第一视角

代码	插座与面板 配合直径	芯数	接插件种类	接线方式	出线方式	适配插孔类型	
						中继母插头	弯角母插头
WS16J2ZQB	16	2	插针	焊接	电缆护套	WS16K2TQ	
WS16J3ZQB		3				WS16K3TQ	
WS16J4ZQB		4				WS16K4TQ	
WS16J5ZQB		5				WS16K5TQ	—
WS16J7ZQB		7				WS16K7TQ	
WS16J9ZQB		9				WS16K9TQ	
WS16J10ZQB		10				WS16K10TQ	
WS20J2ZQB	20	2				WS20K2TQ	WS20K2TS
WS20J3ZQB		3				WS20K3TQ	WS20K3TS
WS20J4ZQB		4				WS20K4TQ	WS20K4TS
WS20J5ZQB		5				WS20K5TQ	WS20K5TS
WS20J7ZQB		7				WS20K7TQ	WS20K7TS
WS20J9ZQB		9				WS20K9TQ	WS20K9TS
WS20J12ZQB		12				WS20K12TQ	WS20K12TS
WS24J2ZQB	24	2				WS24K2TQ	WS24K2TS
WS24J3ZQB		3				WS24K3TQ	WS24K3TS
WS24J4ZQB		4				WS24K4TQ	WS24K4TS
WS24J9ZQB		9				WS24K9TQ	WS24K9TS
WS24J10ZQB		10				WS24K10TQ	WS24K10TS
WS24J12ZQB		12				WS24K12TQ	WS24K12TS
WS24J19ZQB		19				WS24K19TQ	WS24K19TS
WS28J3ZQB	28	3				WS28K3TQ	WS28K3TS
WS28J4ZQB		4				WS28K4TQ	WS28K4TS
WS28J7ZQB		7				WS28K7TQ	WS28K7TS
WS28J8ZQB		8				WS28K8TQ	WS28K8TS
WS28J10ZQB		10				WS28K10TQ	WS28K10TS
WS28J12ZQB		12				WS28K12TQ	WS28K12TS
WS28J16ZQB		16				WS28K16TQ	WS28K16TS
WS28J20ZQB		20				WS28K20TQ	WS28K20TS
WS28J24ZQB		24				WS28K24TQ	WS28K24TS
WS28J26ZQB		26				WS28K26TQ	WS28K26TS

① 适配插孔: 中继母插头详见P562, 弯角母插头详见P563。

① 插座与面板配合直径为16的连接器的无防尘盖。

② 电气技术特性

WS16系列

芯数	2	3	4	5	7	9	10
额定电流(A)	10		5				
接触件直径	Ø1.5×2	Ø1.5×3	Ø1×4	Ø1.5×5	Ø1×7	Ø1×9	Ø1×10
工作电压(V)	500		400				
耐压(V)	1500		1200				
接触电阻(mΩ)	2.5		5				
线规(mm²/AWG)	≤2/14		≤0.75/18				

WS20系列

芯数	2	3	4	5	7	9	12
额定电流(A)	25		10				
接触件直径	Ø2.5×2	Ø2.5×3	Ø2.5×4	Ø1.5×5	Ø1.5×7	Ø1×9	Ø1×12
工作电压(V)	500		400				
耐压(V)	1500		1200				
接触电阻(mΩ)	1		2.5				
线规(mm²/AWG)	≤4/11		≤2/14				

WS24系列

芯数	2	3	4	9	10	12	19
额定电流(A)	25		5.25				
接触件直径	Ø2.5×2	Ø2.5×3	Ø2.5×4	Ø1×5.025×4	Ø1.5×10	Ø1.5×12	Ø1×19
工作电压(V)	500		400				
耐压(V)	1500		1200				
接触电阻(mΩ)	1		5.1				
线规(mm²/AWG)	≤4/11		≤0.75/18, 54/11				

WS28系列

芯数	3	4	7	8	10	12	16	20	24	26
额定电流(A)	50		25					10		
接触件直径	Ø3.5×3	Ø2.5×4	Ø2.5×7	Ø2.5×8	Ø2.5×10	Ø1.5×12	Ø1.5×16	Ø1×20	Ø1×24	Ø1×26
工作电压(V)	500		400					1200		
耐压(V)	1500		1200					5		
接触电阻(mΩ)	0.5		1					2.5		
线规(mm²/AWG)	≤10/7		≤4/11					≤2/14		

② 技术参数

接插方式	螺纹连接
接线方式	焊接: Ø1, Ø2.5, Ø3.5, Ø5.5
接插次数	500
温度范围	-40°C ~ +85°C
绝缘电阻	2000MΩ



请按图示订货

代码
WS16J2ZQB
WS16J3ZQB
WS16J2ZQB