

欧标45系列铝合金型材


◀ 槽宽10.2 · 槽口壁厚4

代码	材质	表面处理
AOB05	A6063-T5	喷砂氧化


- ① 切断面未进行氧化处理。
- ② 最大使用长度：5800~5850mm；
整条标准长度：6000~6020mm。
- ③ 可定制表面处理。




◻ L长度公差




◻ 槽口详图




AOB05-4545




AOB05-4545C




AOB05-4545A




AOB05-4545B




AOB05-4545R




AOB05-4590

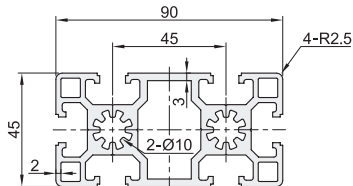


AOB05-4590A

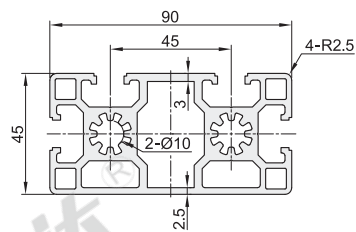

AOB05-4590C

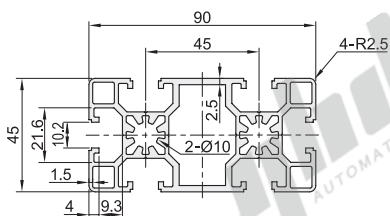

AOB05-9090

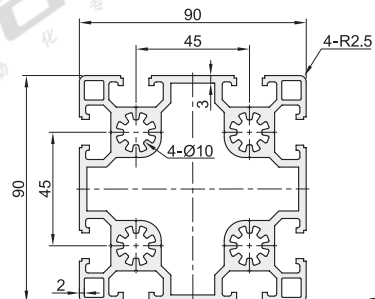

型号		L 最小单位0.5	截面尺寸	每米重量Kg/m (理论值)	截面积 (mm ²)	截面惯性矩		抗弯截面模数	
代码	规格					I_x	I_y	$W_{xmax}(mm^3)$	$W_{ymax}(mm^3)$
AOB05	4545			2.01	730.69	13.69×10^4	13.69×10^4	6083.47	6083.47
	4545C			1.58	572.25	11.07×10^4	11.07×10^4	4920.89	4920.89
	4545A		45×45	1.82	659.74	12.16×10^4	11.88×10^4	5298.81	5279.51
	4545B			1.86	673.96	12.38×10^4	12.38×10^4	5412.44	5412.44
	4545R	50~6000		1.78	644.50	10.33×10^4	10.33×10^4	4210.07	4210.07
	4590			3.67	1332.02	26.72×10^4	101.48×10^4	11875.29	22551.18
	4590A		45×90	3.76	1365.46	28.36×10^4	103.60×10^4	12604.21	23021.99
	4590C			2.88	1046.36	22.13×10^4	80.27×10^4	9845.78	17837.31
	9090			90×90	5.88	2138.20	186.15×10^4	186.15×10^4	41367.11



请按图示订货

型号		L 最小单位0.5	截面尺寸
代码	规格		
AOB05	4545 4545C	50~6000	45×45

AOB05—4545C—L630

可选加工

型号		L 最小单位0.5	可选加工代码
代码	规格		
AOB05	4545 4545C	50~6000	LM/RM DM

AOB05—4545C—L630—RM



可选加工

端面螺孔加工

代码	技术说明
	变更通孔为螺孔
	选型方法] LM/RM/DM
	① Ø10通孔变更为螺孔M12深28.

① 可选加工见P603~608。