


防水型 圆形连接器

前螺母插座 SA系列 威浦品牌

WEIPU 威浦电器



系列	类型	接插方式	材质			防护等级
			外壳 铝 (阳极氧化)	绝缘体 热塑塑料PPS	接触件 铜(镀金)	
SA系列	前螺母插座	推入式 快速锁紧				IP67 (连接后)

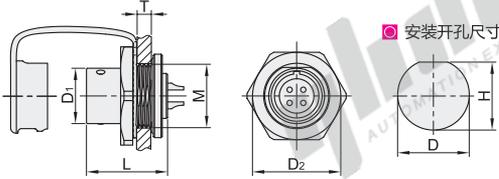

尺寸表
安装开孔尺寸

系列	D ₁	L	D ₂	T(max)	M	D	H
SA6	7.8	12.6	12.8	2	M9×0.75	8.8	8.5
SA8	9.4	12.7	14.8		M11×0.75	10.9	10.3
SA10	11	19.8	17.8		3.5	M13×1	13
SA12	13.8	20	22	4	M16×1	16	15
SA16	18.3	22	27		M22×1	22	20.5
SA20	21.6	23.3	32		M26×1	26	24.7
SA28	29.8	23.8	40		M34×1	34	32.6



插针

型号	颜色	配合直径	芯数	适配插头
				电缆插头
SA615P2	B(黑色) S(银色)	6	2	SA610S2
SA615P3			3	SA610S3
SA615P4			4	SA610S4
SA615P5			5	SA610S5
SA815P2			2	SA810S2
SA815P3			3	SA810S3
SA815P4			4	SA810S4
SA815P6			6	SA810S6
SA815P8			8	SA810S8
SA1015P2			2	SA1010S2
SA1015P3	3	SA1010S3		
SA1015P4	4	SA1010S4		
SA1015P5	5	SA1010S5		
SA1215P2	2	SA1210S2		
SA1215P3	3	SA1210S3		
SA1215P4	4	SA1210S4		
SA1215P5	5	SA1210S5		
SA1215P6	6	SA1210S6		
SA1215P7	7	SA1210S7		
SA1215P9	9	SA1210S9		
SA1615P2	2	SA1610S2		
SA1615P3	3	SA1610S3		
SA1615P4	4	SA1610S4		
SA1615P5	5	SA1610S5		
SA1615P7	7	SA1610S7		
SA1615P9	9	SA1610S9		
SA1615P10	10	SA1610S10		
SA2015P2	2	SA2010S2		
SA2015P3	3	SA2010S3		
SA2015P4	4	SA2010S4		
SA2015P5	5	SA2010S5		
SA2015P6	6	SA2010S6		
SA2015P7	7	SA2010S7		
SA2015P8	8	SA2010S8		
SA2015P9	9	SA2010S9		
SA2015P12	12	SA2010S12		
SA2015P15	15	SA2010S15		
SA2815P2	2	SA2810S2		
SA2815P3	3	SA2810S3		
SA2815P4	4	SA2810S4		
SA2815P7	7	SA2810S7		
SA2815P8	8	SA2810S8		
SA2815P9	9	SA2810S9		
SA2815P10	10	SA2810S10		
SA2815P12	12	SA2810S12		
SA2815P16	16	SA2810S16		
SA2815P17	17	SA2810S17		
SA2815P20	20	SA2810S20		
SA2815P24	24	SA2810S24		
SA2815P26	26	SA2810S26		
SA2815P35	35	SA2810S35		

插头

型号	颜色	配合直径	芯数	适配插头
				电缆插头
SA615S2	B(黑色) S(银色)	6	2	SA610P2
SA615S3			3	SA610P3
SA615S4			4	SA610P4
SA615S5			5	SA610P5
SA815S2			2	SA810P2
SA815S3			3	SA810P3
SA815S4			4	SA810P4
SA815S6			6	SA810P6
SA815S8			8	SA810P8
SA1015S2			2	SA1010P2
SA1015S3	3	SA1010P3		
SA1015S4	4	SA1010P4		
SA1015S5	5	SA1010P5		
SA1215S2	2	SA1210P2		
SA1215S3	3	SA1210P3		
SA1215S4	4	SA1210P4		
SA1215S5	5	SA1210P5		
SA1215S6	6	SA1210P6		
SA1215S7	7	SA1210P7		
SA1215S9	9	SA1210P9		
SA1615S2	2	SA1610P2		
SA1615S3	3	SA1610P3		
SA1615S4	4	SA1610P4		
SA1615S5	5	SA1610P5		
SA1615S7	7	SA1610P7		
SA1615S9	9	SA1610P9		
SA1615S10	10	SA1610P10		
SA2015S2	2	SA2010P2		
SA2015S3	3	SA2010P3		
SA2015S4	4	SA2010P4		
SA2015S5	5	SA2010P5		
SA2015S6	6	SA2010P6		
SA2015S7	7	SA2010P7		
SA2015S8	8	SA2010P8		
SA2015S9	9	SA2010P9		
SA2015S12	12	SA2010P12		
SA2015S15	15	SA2010P15		
SA2815S2	2	SA2810P2		
SA2815S3	3	SA2810P3		
SA2815S4	4	SA2810P4		
SA2815S7	7	SA2810P7		
SA2815S8	8	SA2810P8		
SA2815S9	9	SA2810P9		
SA2815S10	10	SA2810P10		
SA2815S12	12	SA2810P12		
SA2815S16	16	SA2810P16		
SA2815S17	17	SA2810P17		
SA2815S20	20	SA2810P20		
SA2815S24	24	SA2810P24		
SA2815S26	26	SA2810P26		
SA2815S35	35	SA2810P35		

技术参数

接插方式	推入式快速锁紧
接线方式	焊接
接插次数	500次
温度范围	-40℃~+85℃



请按图示订货 SA615P2-B

型号	颜色
SA615P2	B(黑色)
SA615P4	S(银色)