


胀铆螺母/平头条纹拉铆螺母

胀铆螺母

代码	类型	螺纹	材质		表面处理
			国标	相当	
TBC41	胀铆螺母	粗牙	碳钢		镀锌
TBC42			0Cr18Ni9	SUS304	—

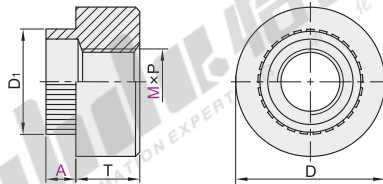

视角标准：第一视角

型号	M	A max	P 螺距	安装板 最小厚度	安装板孔径 +0.08	D	D1 max	T
(碳钢) TBC41 (SUS304) TBC42	3	1	0.5	1	5	7	4.94	3
		1.2		1.2				
		1.5		1.5				
		2		2				
		2.5		2.5				
		3		3				
	4	1	0.7	1	6	8	5.98	4
		1.2		1.2				
		1.5		1.5				
		2		2				
		2.5		2.5				
		3		3				
	5	1	0.8	1	8	10	7.98	5
		1.2		1.2				
		1.5		1.5				
		2		2				
		2.5		2.5				
		3		3				

型号	M	A max	P 螺距	安装板 最小厚度	安装板孔径 +0.08	D	D1 max	T
(碳钢) TBC41 (SUS304) TBC42	6	1	1.0	1	9	11	8.98	6
		1.2		1.2				
		1.5		1.5				
		2		2				
		2.5		2.5				
		3		3				
	8	1	1.25	1	11	13	10.98	6
		1.2		1.2				
		1.5		1.5				
		2		2				
		2.5		2.5				
		3		3				



请按图示订货

型号	M	A
代码	③	①
TBC41	③	①
TBC42	③	①

TBC41—M3—A1.2



● 优惠价
数量 1~100 101~
价格 100% 另行报价
未税价(元)




交货期
7



1、放置


2、铆接

3、配合螺钉使用

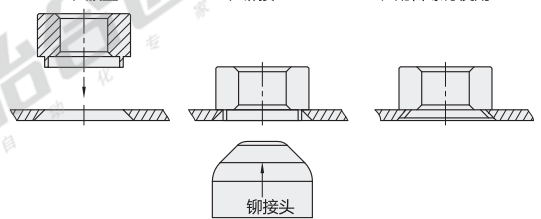


平头条纹拉铆螺母

代码	类型	螺纹	材质	表面处理
代码				
TBY05	平头条纹拉铆螺母	粗牙	碳钢	镀锌
TBY06			不锈钢	—



铆接后



扫一扫
观看产品视频



视角标准：第一视角

型号

代码

M

嘴位编码

P 螺距

铆接范围

Max

Min

A

安装孔径^{+0.1}

D

D₁

K

L

(碳钢) TBY05	3	0	0.5	1.5	0.5		5	4.9	8		10
	4	0	0.7	2.0	0.5	6	6	5.9	9	0.8	10.5
		1		3.5	2.0						12
	5	0	0.8	2.5	0.5	7.5	7	6.9	10	1	13
		1		5.0	2.5	8.5					16.5
		0		3.0	0.5					12.3	13
	6	1	1.0	3.0L	0.5	9.2		8.9		12.3	1.3
		2		5.5	3.0		9			12.3	
		3		5.5L	3.0	10.5				13	19.5
		0		3.5	1.0					14.5	
	8	1	1.25	3.5L	1.0	11.5	11	10.9		16	1.5
		2		6.0	3.5					14.5	
		3		6.0L	3.5					16	21
		0		4.0	1.0					17	
		1		4.0L	1.0					19	21.5
	10	2	1.5	6.5	4.0	13.5	13	12.9		17	1.7
		3		6.5L	4.0					19	24
		4		3.5	1.0	11	12	11.9	16	1.6	19
		0		4.0	1.0	13.5				14	22
	12	1	1.75	6.5	4.0	14	15	14.9	18	1.7	25
		2		3.5	1.0	15				15	28
		3		6.0	3.5	16	16	15.9	22	2	28

型号

代码

M

嘴位编码

P 螺距

铆接范围

Max

Min

A

安装孔径^{+0.1}

D

D₁

K

L

(不锈钢) TBY06	4	0	0.7	2.0	0.5	6.5	6	5.9	9	0.8	10.5
	5	1	0.8	2.5	0.5	8	7	6.9	10	1	13
	6	0	1.0	3.0	0.5	9.2	9	8.9	12.3	1.3	15.5
	8	1	1.25	3.5	1.0	11.5	11	10.9	14.5	1.5	18.5
	10	0	1.5	4.0	1.0	13.5	13	12.9	17	1.6	21



请按图示订货

型号

代码

M

嘴位编码

P 螺距

铆接范围

Max

Min

A

安装孔径^{+0.1}

D

D₁

K

L

(不锈钢) TBY06	4	0	0.7	2.0	0.5	6.5	6	5.9	9	0.8	10.5
	5	1	0.8	2.5	0.5	8	7	6.9	10	1	13

TBY06—M5—1



优惠价

数量	1~99	100~
价格	100%	另行报价



交货期

7



请按图示订货

型号	M	嘴位 编码
代码	④	①
TBY05	④	①
TBY06	④	①

TBY06—M5—1



● 优惠价
数量 1~99 100~
价格 100% 另行报价
未税价(元)



交货期
7