



代码	材质	表面处理
AGB06	A6063-T5	喷砂电泳

- ① 切断面未进行氧化处理。
② 最大使用长度：5800~5850mm；
整条标准长度：6000~6020mm。
③ 可定制表面处理。




国标40系列


● L长度公差




● 4040槽口详图




● 4080/8080槽口详图




AGB06-J4040Y

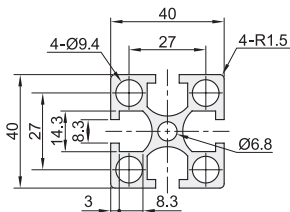


AGB06-J4040YA

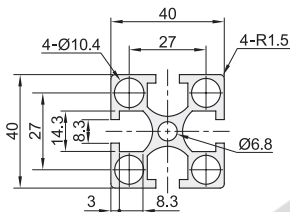


AGB06-J4040A

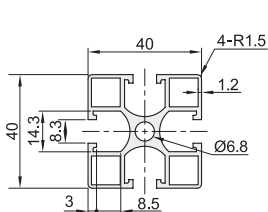


AGB06-J4040G

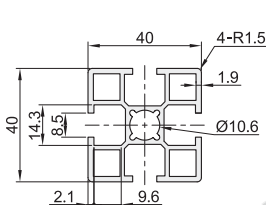


AGB06-J4040GY

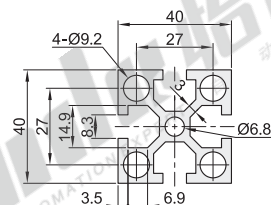


AGB06-J4040GA




AGB06-J4040RS

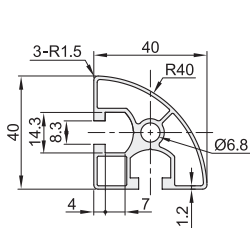


AGB06-J4080Y

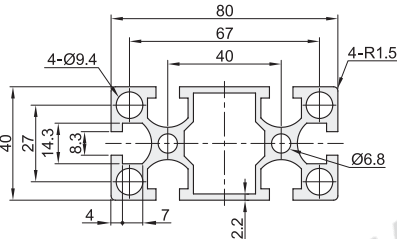


AGB06-J4080A

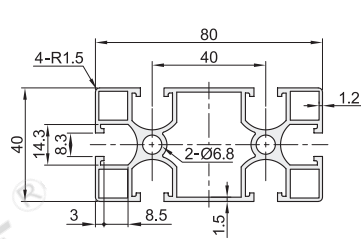

AGB06-J4080G

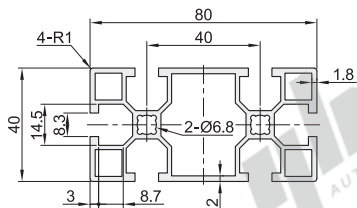

AGB06-J8080Y

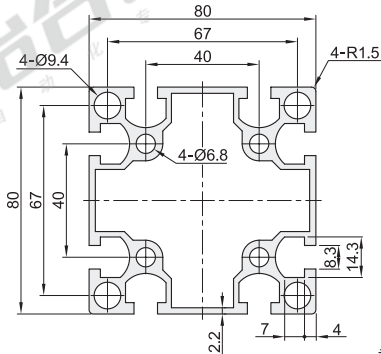

国标40系列铝合金型材(实用型)

槽宽8.3 · 边长40/80mm

国标40系列

型号		L 最小单位0.5	截面尺寸	每米重量Kg/m (理论值)	截面积 (mm ²)	截面惯性矩		抗弯截面模数	
代码	规格					I _x	I _y	W _{xmax} (mm ³)	W _{ymin} (mm ³)
AGB06	J4040Y	50~6000	40×40	1.59	578.75	9.4085×10 ⁴	9.4085×10 ⁴	4704.25	4704.25
	J4040YA			1.44	523.55	8.3389×10 ⁴	8.3389×10 ⁴	4169.45	4169.45
	J4040A			1.16	419.65	6.2320×10 ⁴	6.2320×10 ⁴	3116.20	3116.20
	J4040G			1.23	446.05	7.60×10 ⁴	7.60×10 ⁴	3797.62	3797.62
	J4040GY			1.62	589.62	9.74×10 ⁴	9.74×10 ⁴	4869.46	4869.46
	J4040GA		40×80	1.38	500.84	8.38×10 ⁴	8.01×10 ⁴	4114.36	4005.94
	J4040RS			0.92	334.68	4.2590×10 ⁴	4.2590×10 ⁴	1827.81	1827.81
	J4080Y			2.73	992.97	17.0526×10 ⁴	68.4778×10 ⁴	8526.34	17119.47
	J4080A			1.87	679.36	11.4740×10 ⁴	45.1270×10 ⁴	5736.90	11281.76
	J4080G			2.01	731.18	13.93×10 ⁴	50.97×10 ⁴	6966.34	12739.27
	J8080Y		80×80	4.00	1453.52	111.5013×10 ⁴	111.5013×10 ⁴	27875.33	27875.33



请按图示订货

型号		L
代码	规格	最小单位0.5
AGB06	J4040Y	50~6000
	J4040YA	

AGB06 — J4040Y — L50

怡合达[®]
AUTOMATION EXPERT 自动化专家

怡合达[®]
AUTOMATION EXPERT 自动化专家