

圆弧齿同步带

S2M/S3M/S5M/S8M型 经济型/精密型

同步带


F2

代码	类型	齿距	材质		颜色	使用温度
			主体	芯线		
ECP01	经济型	2.0	氯丁橡胶	聚氨酯		-30~80°C
J-ECP01	精密型					
J-ECP02	精密型					
ECP11	经济型	3.0	氯丁橡胶	玻璃纤维线	黑色	-30~80°C
J-ECP11	精密型					
J-ECP12	精密型					
ECP21	经济型	5.0	氯丁橡胶			-30~80°C
J-ECP21	精密型					
ECP31	经济型					
J-ECP31	精密型	8.0				

代码	齿形	齿距	L	h	H	V	Ra	PLD	单位重量(kg/10mm×m)
ECP01/J-ECP01	S2M	2	1.3	0.76	1.36	0.6	1.3	0.254	0.013
J-ECP02									
ECP11/J-ECP11	S3M	3	1.95	1.14	1.94	0.8	1.95	0.381	0.019
J-ECP12									
ECP21/J-ECP21	S5M	5	3.25	1.91	3.41	1.1	3.25	0.480	0.034
ECP31/J-ECP31	S8M	8	5.2	3.05	5.3	2.25	5.2	0.686	0.052



皮带宽度公差	
皮带宽度(mm)	公差
3~30	±0.5

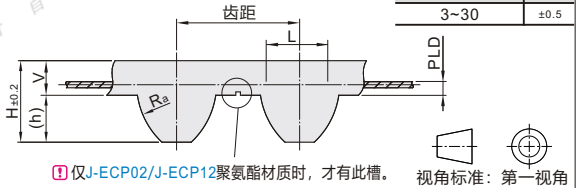

- 为减少橡胶屑飞散，精密型橡胶同步带部分齿形齿面布为茶棕色，对强度及使用性能无影响；
- 橡胶同步带芯线采用螺旋缠绕的方式排布，分切后会看到芯线层，不影响使用；
- 表格中所有代码的皮带周长为芯线长度；
- 重量为理论值，与实物可能存在差异，仅供参考；
- 精密型橡胶同步带表面具有一定的导电功能，经济型橡胶同步带和聚氨酯同步带无此功能；
- 如需要经济型防静电同步带，请联系我司产品部门。

仅J-ECP02/J-ECP12聚氨酯材质时，才有此槽。

视角标准：第一视角

经济型 ECP01-S2M (齿距: 2)

型号	皮带公称宽度	皮带周长	齿数
经济型	40 (4mm)	88	44
		90	45
		94	47
		96	48
		98	49
		100	50
		102	51
		104	52
		106	53
		108	54
		110	55
		112	56
		114	57
		116	58
		118	59
		120	60
		122	61
		124	62
126	63		
128	64		
130	65		
132	66		
134	67		
136	68		
140	70		
142	71		
144	72		
146	73		
148	74		
150	75		
152	76		
156	78		
158	79		
160	80		
164	82		
166	83		
168	84		
172	86		
176	88		
178	89		
180	90		
经济型	60 (6mm)	182	91
		184	92
		186	93
		188	94
		190	95
		192	96
		194	97
		196	98
		198	99
		200	100
		202	101
		204	102
		206	103
		208	104
		210	105
		212	106
		214	107
		218	109
220	110		
224	112		
226	113		
228	114		
230	115		
234	117		
236	118		
240	120		
244	122		
246	123		
248	124		
250	125		
252	126		
254	127		
256	128		
260	130		
262	131		
264	132		
266	133		
268	134		
270	135		
274	137		
276	138		
278	139		
280	140		
284	142		
286	143		
288	144		

精密型 J-ECP01-S2M (齿距: 2)

型号	皮带公称宽度	皮带周长	齿数
经济型	40 (4mm)	290	145
		292	146
		296	148
		298	149
		300	150
		302	151
		306	153
		308	154
		310	155
		312	156
		314	157
		316	158
		318	159
		320	160
		322	161
		324	162
		328	164
		330	165
334	167		
336	168		
340	170		
344	172		
348	174		
352	176		
354	177		
356	178		
360	180		
364	182		
366	183		
370	185		
376	188		
380	190		
386	193		
390	195		
392	196		
396	198		
400	200		
410	205		
416	208		
420	210		
426	213		
430	215		
436	218		
438	219		
440	220		
442	221		
444	222		
446	223		
448	224		
452	226		
460	230		
464	232		
468	234		
478	239		
480	240		
486	243		
492	246		
494	247		
498	249		
500	250		
502	251		
504	252		
508	254		
518	259		
520	260		
522	261		
530	265		
556	278		
560	280		
570	285		
572	286		
578	289		
580	290		
586	293		
594	297		
600	300		
604	302		
606	303		
610	305		
630	315		
638	319		
648	324		
650	325		
656	328		
688	344		
710	355		
726	363		

经济型 ECP01-S2M (齿距: 2)

型号	皮带公称宽度	皮带周长	齿数
经济型	40 (4mm)	754	377
		800	400
		810	405
		836	418
		848	424
		860	430
		896	448
		900	450
		984	492
		996	498
		998	499
		1002	501
		1004	502
		1016	508
		1036	518
		1224	612
		1424	712
		1432	716
1624	812		
1632	816		
1824	912		
2024	1012		
2148	1074		
3000	1500		
3076	1538		
3672	1836		
3828	1914		
精密型	40 (4mm)	66	33
		72	36
		74	37
		76	38
		78	39
		80	40
		82	41
		84	42
		86	43
		88	44
		90	45
		92	46
		94	47
		96	48
		98	49
		100	50
		102	51
		104	52
106	53		
110	55		
112	56		
114	57		
116	58		
118	59		
120	60		
122	61		
124	62		
126	63		
128	64		
130	65		
132	66		
134	67		
136	68		
140	70		
142	71		
144	72		
146	73		
148	74		
150	75		
152	76		
156	78		
158	79		
160	80		
164	82		
166	83		
168	84		
170	85		
172	86		
174	87		
176	88		
178	89		
180	90		

精密型 J-ECP01-S2M (齿距: 2)

型号	皮带公称宽度	皮带周长	齿数
经济型	40 (4mm)	182	91
		184	92
		186	93
		190	95
		192	96
		194	97
		196	98
		198	99
		200	100
		202	101
		204	102
		206	103
		208	104
		210	105
		212	106
		214	107
		216	108
		218	109
220	110		
224	112		
226	113		
230	115		
232	116		
234	117		
236	118		
238	119		
240	120		
244	122		
246	123		
248	124		
250	125		
252	126		
254	127		
256	128		
258	129		
260	130		
262	131		
264	132		
266	133		
268	134		
270	135		
272	136		
274	137		
276	138		
278	139		
280	140		
284	142		
286	143		
288	144		
290	145		
292	146		
296	148		
300	150		
302	151		
304	152		
306	153		
308	154		
310	155		
312	156		
314	157		
316	158		
318	159		
320	160		
322	161		
324	162		
326	163		
328	164		
330	165		
334	167		
338	169		
340	170		
342	171		
344	172		
346	173		
348	174		
350	175		
354	177		
360	180		
364	182		
370	185		
372	186		
374	187		
376	188		
380	190		
386	193		

精密型 J-ECP01-S2M (齿距: 2)

型号	皮带公称宽度	皮带周长	齿数
经济型	40 (4mm)	390	195
		396	198
		400	200
		402	201
		408	204
		410	205
		426	213
		430	215
		434	217
		436	218
		438	219
		440	220
		442	221
		444	222
		448	224
		452	226
		456	228
		460	230
464	232		
468	234		
474	237		
476	238		
480	240		
486	243		
494	247		
500	250		
520	260		
524	262		
530	265		
550	275		
560	280		
572	286		
580	290		
586	293		
594	297		
600	300		
604	302		
630	315		
638	319		
640	320		
648	324		
656	328		
660	330		
672	336		
676	338		
694	347		
710	355		
726	363		
740	370		
752	376		
778	389		
796	398		
800	400		
810	405		
822	411		
826	413		
848	424		
856	428		
862	431		
866	433		
880	440		
882	441		
898	449		
900	450		
910	455		
930	465		
944	472		
976	488		
984	492		
1016	508		
1062	531		
1066	533		
1100	550		
1136	568		
1140	570		
1148	574		
1196	598		
1224	612		
1250	625		
1274	637		
1290	645		
1330	665		
1420	710		
1524	762		
1878	939		

◎ J-ECP02-S2M(齿距: 2)

型号		皮带 周长	齿数
代码	皮带公称宽度		
		80	40
		90	45
		98	49
		100	50
		112	56
		114	57
		118	59
		120	60
		122	61
		126	63
		130	65
		138	69
		140	70
		144	72
		152	76
		158	79
		160	80
		164	82
		166	83
		172	86
		190	95
		194	97
		200	100
		210	105
		212	106
		218	109
		220	110
		224	112
		230	115
		236	118
		240	120
		244	122
		246	123
		250	125
		260	130
		280	140
		290	145
		320	160
		330	165
		360	180
		370	185
		396	198
		436	218
		448	224
		480	240
		488	244
		520	260
		560	280
		572	286
		580	290
		630	315
		984	492
		1062	531
		1196	598
		1250	625

◎ ECP11-S3M(齿距: 3)

型号		皮带 周长	齿数
代码	皮带公称宽度		
		87	29
		102	34
		111	37
		120	40
		123	41
		126	42
		129	43
		132	44
		135	45
		138	46
		141	47
		144	48
		147	49
		150	50
		153	51
		156	52
		159	53
		162	54
		165	55
		168	56
		171	57
		174	58
		177	59
		180	60
		183	61
		186	62
		189	63
		192	64
		195	65
		198	66
		201	67
		204	68
		207	69
		210	70
		213	71
		216	72
		219	73
		222	74
		225	75
		228	76
		231	77
		234	78
		237	79

◎ ECP11-S3M(齿距: 3)

型号		皮带 周长	齿数
代码	皮带公称宽度		
		240	80
		243	81
		246	82
		249	83
		252	84
		255	85
		258	86
		261	87
		264	88
		267	89
		270	90
		273	91
		276	92
		279	93
		282	94
		285	95
		288	96
		291	97
		294	98
		297	99
		300	100
		303	101
		306	102
		309	103
		312	104
		315	105
		318	106
		321	107
		324	108
		327	109
		330	110
		333	111
		336	112
		339	113
		342	114
		345	115
		348	116
		351	117
		354	118
		357	119
		360	120
		363	121
		366	122
		369	123
		372	124
		375	125
		378	126
		381	127
		384	128
		387	129
		390	130
		393	131
		396	132
		399	133
		402	134
		405	135
		408	136
		411	137
		414	138
		417	139
		420	140
		423	141
		426	142
		429	143
		432	144
		435	145
		438	146
		441	147
		444	148
		447	149
		450	150
		453	151
		456	152
		459	153
		462	154
		465	155
		468	156
		471	157
		474	158
		477	159
		480	160
		483	161
		486	162
		489	163
		492	164
		495	165
		498	166
		501	167
		504	168
		507	169
		510	170
		513	171
		516	172
		519	173
		522	174
		525	175
		531	177
		537	179
		540	180
		543	181
		549	183
		555	185
		558	186
		564	188

◎ ECP11-S3M(齿距: 3)

型号		皮带 周长	齿数
代码	皮带公称宽度		
		567	189
		570	190
		573	191
		576	192
		579	193
		582	194
		585	195
		588	196
		591	197
		594	198
		597	199
		600	200
		603	201
		606	202
		609	203
		612	204
		621	207
		630	210
		633	211
		636	212
		639	213
		642	214
		645	215
		648	216
		651	217
		657	219
		660	220
		666	222
		675	225
		681	227
		690	230
		693	231
		696	232
		699	233
		708	236
		711	237
		714	238
		720	240
		726	242
		741	247
		750	250
		753	251
		756	252
		765	255
		768	256
		780	260
		783	261
		789	263
		801	267
		804	268
		810	270
		819	273
		825	275
		840	280
		852	284
		858	286
		879	293
		882	294
		888	296
		900	300
		909	303
		918	306
		924	308
		927	309
		936	312
		948	316
		954	318
		960	320
		966	322
		972	324
		999	333
		1005	335
		1014	338
		1050	350
		1056	352
		1062	354
		1080	360
		1110	370
		1119	373
		1146	382
		1170	390
		1188	396
		1203	401
		1245	415
		1260	420
		1263	421
		1290	430
		1401	467
		1422	474
		1461	487
		1500	500
		1596	532
		1611	537
		1680	560
		1788	596
		1800	600
		1884	628
		2025	675
		2100	700
		3210	1070
		3324	1108
		4020	1340
		4500	1500

◎ J-ECP11-S3M(齿距: 3)

型号		皮带 周长	齿数
代码	皮带公称宽度		
		96	32
		102	34
		114	38
		120	40
		123	41
		129	43
		132	44
		135	45
		141	47
		144	48
		147	49
		150	50
		156	52
		159	53
		162	54
		168	56
		171	57
		174	58
		177	59
		180	60
		186	62
		189	63
		192	64
		195	65
		198	66
		201	67
		204	68
		207	69
		210	70
		213	71
		216	72
		219	73
		222	74
		225	75
		228	76
		231	77
		234	78
		237	79
		246	82
		252	84
		255	85
		258	86
		261	87
		264	88
		267	89
		270	90
		273	91
		276	92
		279	93
		282	94
		285	95
		288	96
		291	97
		300	100
		303	101
		306	102
		309	103
		312	104
		315	105
		318	106
		324	108
		327	109
		330	110
		333	111
		336	112
		339	113
		345	115
		348	116
		351	117
		354	118
		357	119
		360	120
		363	121
		366	122
		369	123
		372	124
		375	125
		378	126
		384	128
		387	129
		390	130
		393	131
		396	132
		399	133
		402	134
		405	135
		408	136
		414	138
		417	139
		420	140
		423	141
		426</	

圆弧齿同步带

S2M/S3M/S5M/S8M型 经济型/精密型

同步带

F2

◎ J-ECP12-S3M(齿距: 3)

型号			
代码	皮带公称宽度	皮带周长	齿数
	141	47	
	144	48	
	162	54	
	174	58	
	177	59	
	180	60	
	186	62	
	189	63	
	192	64	
	195	65	
	201	67	
	210	70	
	213	71	
	219	73	
	225	75	
	246	82	
	249	83	
	252	84	
	255	85	
	264	88	
	276	92	
	288	96	
	300	100	
	312	104	
	318	106	
	327	109	
	345	115	
	360	120	
	363	121	
	369	123	
	375	125	
	378	126	
	387	129	
	396	132	
	402	134	
	405	135	
	408	136	
	420	140	
	432	144	
	453	151	
	459	153	
	474	158	
	483	161	
	501	167	
	519	173	
	537	179	
	540	180	
	564	188	
	591	197	
	600	200	
	633	211	
	645	215	
	681	227	
	741	247	

◎ ECP21-S5M(齿距: 5)

型号			
代码	皮带公称宽度	皮带周长	齿数
	150	30	
	160	32	
	180	36	
	185	37	
	200	40	
	220	44	
	225	45	
	230	46	
	235	47	
	240	48	
	245	49	
	250	50	
	255	51	
	260	52	
	265	53	
	270	54	
	275	55	
	280	56	
	285	57	
	290	58	
	295	59	
	300	60	
	305	61	
	310	62	
	315	63	
	320	64	
	325	65	
	330	66	
	335	67	
	340	68	
	345	69	
	350	70	
	355	71	
	360	72	
	365	73	
	370	74	
	375	75	
	380	76	
	385	77	
	390	78	
	395	79	
	400	80	
	405	81	
	410	82	
	415	83	
	420	84	
	425	85	
	430	86	
	435	87	
	440	88	

◎ ECP21-S5M(齿距: 5)

型号			
代码	皮带公称宽度	皮带周长	齿数
	445	89	
	450	90	
	455	91	
	460	92	
	465	93	
	470	94	
	475	95	
	480	96	
	485	97	
	490	98	
	495	99	
	500	100	
	505	101	
	510	102	
	515	103	
	520	104	
	525	105	
	530	106	
	535	107	
	540	108	
	545	109	
	550	110	
	555	111	
	560	112	
	565	113	
	570	114	
	575	115	
	580	116	
	585	117	
	590	118	
	595	119	
	600	120	
	605	121	
	610	122	
	615	123	
	620	124	
	625	125	
	630	126	
	635	127	
	640	128	
	645	129	
	650	130	
	655	131	
	660	132	
	665	133	
	670	134	
	675	135	
	680	136	
	685	137	
	690	138	
	695	139	
	700	140	
	705	141	
	710	142	
	715	143	
	720	144	
	725	145	
	730	146	
	735	147	
	740	148	
	745	149	
	750	150	
	755	151	
	760	152	
	765	153	
	770	154	
	775	155	
	780	156	
	785	157	
	790	158	
	795	159	
	800	160	
	805	161	
	810	162	
	815	163	
	820	164	
	825	165	
	830	166	
	835	167	
	840	168	
	845	169	
	850	170	
	860	172	
	865	173	
	870	174	
	875	175	
	880	176	
	885	177	
	890	178	
	895	179	
	900	180	
	905	181	
	910	182	
	915	183	
	920	184	
	925	185	
	930	186	
	935	187	
	940	188	
	945	189	
	950	190	
	955	191	
	960	192	
	970	194	
	975	195	
	980	196	
	985	197	
	990	198	
	1000	200	
	1010	202	

◎ ECP21-S5M(齿距: 5)

型号			
代码	皮带公称宽度	皮带周长	齿数
	1025	205	
	1050	210	
	1060	212	
	1080	216	
	1085	217	
	1100	220	
	1110	222	
	1115	223	
	1120	224	
	1125	225	
	1135	227	
	1145	229	
	1150	230	
	1160	232	
	1165	233	
	1175	235	
	1180	236	
	1195	239	
	1200	240	
	1210	242	
	1215	243	
	1225	245	
	1250	250	
	1270	254	
	1295	259	
	1300	260	
	1305	261	
	1310	262	
	1320	264	
	1330	266	
	1335	267	
	1350	270	
	1380	276	
	1390	278	
	1400	280	
	1420	284	
	1450	290	
	1460	292	
	1475	295	
	1500	300	
	1510	302	
	1530	306	
	1550	310	
	1595	319	
	1600	320	
	1615	323	
	1650	330	
	1675	335	
	1685	337	
	1690	338	
	1695	339	
	1700	340	
	1715	343	
	1765	353	
	1800	360	
	1945	389	
	1960	392	
	2000	400	
	2100	420	
	2350	470	
	2400	480	
	2450	490	
	2490	496	
	2525	505	
	2765	553	
	2800	560	
	2980	596	
	3090	618	
	3800	760	
	4000	800	

◎ J-ECP21-S5M(齿距: 5)

型号			
代码	皮带公称宽度	皮带周长	齿数
	225	45	
	230	46	
	255	51	
	260	52	
	295	59	
	300	60	
	305	61	
	320	64	
	325	65	
	340	68	
	350	70	
	360	72	
	370	74	
	375	75	
	380	76	
	390	78	
	395	79	
	400	80	
	415	83	
	425	85	
	435	87	
	440	88	
	450	90	
	475	95	
	490	98	
	500	100	
	520	104	
	525	105	
	530	106	
	545	109	
	550	110	
	560	112	
	575	115	

◎ J-ECP21-S5M(齿距: 5)

型号			
代码	皮带公称宽度	皮带周长	齿数
	590	118	
	595	119	
	600	120	
	615	123	
	625	125	
	640	128	
	650	130	
	665	133	
	670	134	
	675	135	
	690	138	
	695	139	
	700	140	
	710	142	
	720	144	
	725	145	
	730	146	
	740	148	
	750	150	
	765	153	
	780	156	
	800	160	
	810	162	
	830	166	
	845	169	
	850	170	
	870	174	
	890	178	
	900	180	
	930	186	
	950	190	
	965	193	
	975	195	
	980	196	
	1000	200	
	1025	205	
	1050	210	
	1055	211	
	1085	217	
	1090	218	
	1100	220	
	1105	221	
	1115	223	
	1120	224	
	1125	225	
	1135	227	
	1145	229	
	1160	232	
	1165	233	
	1175	235	
	1180	236	
	1195	239	
	1200	240	
	1210	242	
	1215	243	
	1225	245	
	1250	250	
	1270	254	
	1295	259	
	1300	260	
	1305	261	
	1310	262	
	1320	264	
	1330	266	
	1335	267	
	1350	270	
	1380	276	
	1390	278	
	1400	280	
	1420	284	
	1450	290	

经济型 ECP31-S8M(齿距: 8)

型号	皮带公称长度	齿数
1512	189	
1520	190	
1528	191	
1536	192	
1544	193	
1552	194	
1560	195	
1568	196	
1576	197	
1584	198	
1592	199	
1600	200	
1608	201	
1624	203	
1632	204	
1640	205	
1648	206	
1672	209	
1680	210	
1688	211	
1696	212	
1728	216	
1760	220	
1776	222	
1792	224	
1800	225	
1816	227	
1824	228	
1832	229	
1840	230	
1856	232	
1880	235	
1896	237	
1904	238	
1912	239	
1920	240	
1928	241	
1936	242	
1952	244	
1960	245	
2000	250	
2016	252	
2032	254	
2040	255	
2048	256	
2056	257	
2080	260	
2096	262	
2104	263	
2120	265	
2136	267	
2160	270	
2200	275	
2240	280	
2256	282	
2272	284	
2288	286	
2296	287	
2304	288	
2320	290	
2400	300	
2432	304	
2448	306	
2464	308	
2496	312	
2504	313	
2520	315	
2536	317	
2560	320	
2600	325	
2624	328	
2640	330	
2680	335	
2704	338	
2736	342	
2760	345	
2800	350	
2848	356	
2880	360	
2904	363	
2920	365	
2944	368	
3000	375	
3048	381	
3120	390	
3200	400	
3264	408	
3280	410	
3304	413	
3400	425	
3440	430	
3600	450	
3680	460	
3720	465	
3800	475	
4000	500	
4104	513	
4200	525	
4400	550	
5280	660	

精密型 J-ECP31-S8M(齿距: 8)

型号	皮带公称长度	齿数
376	47	
400	50	
408	51	
440	55	
480	60	
496	62	
512	64	
520	65	
528	66	
560	70	
584	73	
600	75	
632	79	
640	80	
656	82	
680	85	
712	89	
720	90	
760	95	
800	100	
824	103	
840	105	
848	106	
856	107	
880	110	
896	112	
912	114	
920	115	
928	116	
944	118	
952	119	
960	120	
976	122	
984	123	
1000	125	
1024	128	
1040	130	
1056	132	
1080	135	
1096	137	
1120	140	
1128	141	
1136	142	
1152	144	
1160	145	
1184	148	
1200	150	
1216	152	
1224	153	
1240	155	
1248	156	
1256	157	
1280	160	
1296	162	
1304	163	
1312	164	
1320	165	
1344	168	
1352	169	
1360	170	
1368	171	
1384	173	
1400	175	
1424	178	
1440	180	
1480	185	
1488	186	
1520	190	
1552	194	
1600	200	
1640	205	
1648	206	
1680	210	
1696	212	
1728	216	
1760	220	
1776	222	
1792	224	
1800	225	
1816	227	
1832	229	
1880	235	
1912	239	
1960	245	
2000	250	
2040	255	
2048	256	
2064	258	
2104	263	
2120	265	
2160	270	
2240	280	
2272	284	
2304	288	
2400	300	
2496	312	
2600	325	
2800	350	
2920	365	
2944	368	
3048	381	
3200	400	
3248	406	
3272	409	
3440	430	
3680	460	
4400	550	

经济型 ECP01-S2M(齿距: 2)

型号	皮带公称长度	皮带周长	齿数
ECR01-S2M	40	100	50
	60	104	52
ECP01-S2M-60-102			



请按图示订货



未税价(元)



交货期
3

精密型

优惠价

数量 1~4 5~
价格 100% 另行报价



交货期
5

经济型

