

外螺纹型 · P尺寸指定型


大头锥角型

定位销


P尺寸指定型		材质		硬度	表面处理
圆型	多棱型	国标	相当		
YBY61	YBY71	9CrWMn	SKS3	淬火硬度58~61HRC	—
YBY62	YBY72			淬火硬度58~61HRC, 镀层硬度850HV~	镀硬铬, 镀层厚度3~5μm
YBY65	YBY75			—	—
YBY66	YBY76	0Cr18Ni9	SUS304	镀层硬度850HV~	镀硬铬, 镀层厚度5~8μm
YBY68	YBY78	9Cr18Mo	SUS440C	淬火硬度48~53HRC	—



圆型
YBY61/62/65/66/68

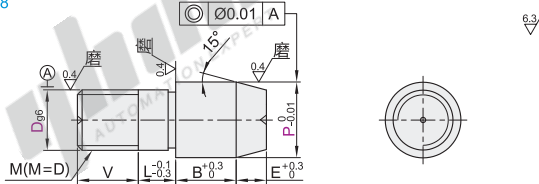

多棱型
YBY71/72/75/76/78

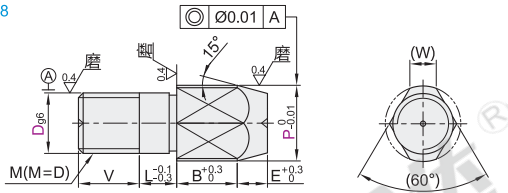

视角标准：第一视角

型号		最小单位0.01		L	B	V	M	E	(W)
代码	Dg6	P							
	3	3.50~6.00	2	5	4.5	3	2	1.5	
	4	4.50~7.00			6	4	1.8		
	5	5.50~8.00				7.5	2.2		
	6	6.50~10.00	3			6	3		
	8	9.00~13.00			8	8	3.5		
	10	11.00~15.00	5			9	4		
	12	13.00~18.00			10	10	4		
	16	17.00~25.00	8			15	5		
	20	22.00~30.00	10			18	5		
						24	7		
						30	9		



型号	Dg6	P
YBY61	3	3.50~6.00
YBY62	4	4.50~7.00



数量	1~4	5~
价格	100%	另行报价

交货期
8



夹具用衬套
A6