

导向轴

带挡圈槽型 直杆型


代码	类型	D公差	材质		硬度	表面处理
			国标	相当		
Y-FCB02			GCr15	SUJ2	高频淬火 有效硬化层深度见P131	镀硬铬, 镀层硬度HV750~, 镀层厚度3μm~
Y-FCB06	带挡圈槽型	g6	9Cr18Mo 或同等硬度 耐腐蚀钢	SUS440C 或同等硬度 耐腐蚀钢	淬火硬度 GCr15 HRC56~ 9Cr18Mo HRC52~	—
Y-FCB07						镀硬铬, 镀层硬度HV750~, 镀层厚度3μm~



RoHS



来图定制

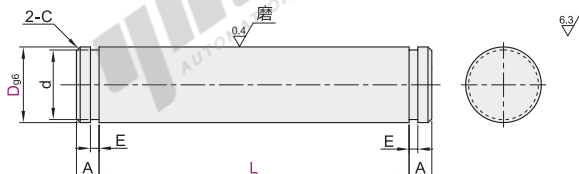

① 圆度/直线度/垂直度/同轴度/硬度变化/铬层分布, 请参阅导向轴产品简介。

视角标准: 第一视角

代码	型号		L 最小单位1	A	E	d		附带挡圈(2个)		C
	Dg6							Y-FCB06	Y-FCB02/07	
Y-FCB02 Y-FCB06 Y-FCB07	3	-0.002 -0.008	8~400	2	0.5	+0.05 0	2	TBP11-2	TBP12-2	0.5
	4	-0.004 -0.012					3	TBP11-3	TBP12-3	
	5	-0.004 -0.012					4	TBP11-4	TBP12-4	
	6	-0.005 -0.014					5	TBP11-5	TBP12-5	
	8	-0.005 -0.014	15~600	3	0.7	+0.1 0	7	TBP11-7	TBP12-7	0.5
	10	-0.005 -0.014					9.6	TBP01-10	TBP02-10	
	12	-0.006 -0.017					11.5	TBP01-12	TBP02-12	
	13	-0.006 -0.017					12.4	TBP01-13	TBP02-13	
	15	-0.006 -0.017	15~800	3.5	0.9	+0.14 0	14.3	TBP01-15	TBP02-15	0.5
	16	-0.006 -0.017					15.2	TBP01-16	TBP02-16	
	18	-0.007 -0.020					17	TBP01-18	TBP02-18	
	20	-0.007 -0.020					19	TBP01-20	TBP02-20	
	25	-0.007 -0.020	20~1200	4.5	1.15	+0.21 0	23.9	TBP01-25	TBP02-25	1.0
	30	-0.007 -0.020					28.6	TBP01-30	TBP02-30	

① 适用挡圈请参阅怡合达电商平台。



请按图示订货

型号	D	L	A
Y-FCB06 Y-FCB07	4	8~400	2

Y-FCB06—D3—L12

② 可选加工


型号	D	L	可选加工代码
Y-FCB06 Y-FCB07	4	8~400	HC

Y-FCB06—D3—L12—HC



可选加工

代码	技术说明
HC	一端挡圈槽取消 选型方法 HC



① 可选加工可能会使产品硬度降低。



未税价(元)

● 优惠价

数量	1~9	10~
价格	95%	另行报价