


双面带防尘盖式 经济型

微型深沟球轴承

代码	类型	轴承类型 代码	轴承精度	后置代码	轴承材质	
					国标	相当
BAF...-E	经济型	6	GB/T 307.1 0级	ZZ(双面带防尘盖)	GCr15	SUJ2
BAF...-E-SUS					30Cr13	SUS420

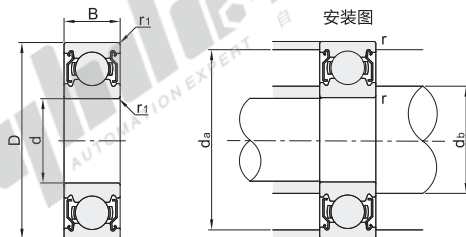

- ① 不承诺品牌。
- ② 经济型适合中低转速、低载荷。
- ③ 基本额定负载/容许转速/重量值不适用于SUS420材质。



型号		d	D	B	r1 (min)	基本额定负载(N)		极限转速 rpm(参考)	安装尺寸			重量(g) (参考)
代码	轴承型号					Cr(动)	Cor(静)		db (min)	da (max)	r (max)	
BAF...-E	682ZZ	5	2.3	0.08	80	51	74000	2.8	4.2	0.08	0.13	0.17
	692ZZ	6	3	0.15	150	89	67000	3.2	4.8	0.15	0.31	0.38
	602ZZ	7	3.5			125	62000	3.2	5.8	0.15	0.54	0.58
	682AZZ	6	2.6	0.08	80	73	65000	3.1	4.8	0.08	0.22	0.29
	692AZZ	7	3.5	0.15	150	96	59000	3.7	5.8	0.15	0.43	0.55
	673ZZ	6	2.5	0.08	80	94	60000	3.6	5.4	0.08	0.2	0.2
	683ZZ	7	3	0.1	100	130	58000	3.9	5.8	0.1	0.33	0.45
	693ZZ	8	4			180	54000	4.2	7.8	0.15	0.92	1.13
	603ZZ	9	5	0.15	150	219	50000	4.2	7.8	0.15	0.92	1.13
	623ZZ	10	4			224	50000	4.6	8.8		1.6	1.6
	633ZZ	13	5	0.2	1301	488	40000	4.6	11.4	0.2	3.43	3.43
	674ZZ	7	2.5	0.08	222	88	60000	6.4	0.08	0.28		0.28
	684ZZ	9				224	49000	5	7.8	0.1	0.76	1.01
	694ZZ	11	4	0.15	150	276	45000	5.2	9.8	0.15	2	1.8
	604ZZ	12		0.2	200	360	43000	5.6	10.4	0.2	2.3	2.34
	624ZZ	13	5			490	42000	5.6	11.4	0.2	3.5	3.2
	634ZZ	16	6	0.3	300	680	37000	6	14	0.3	5.1	5.44
	675ZZ	8	2.5	0.08	80	91	49000	5.6	7.4	0.08	0.32	0.34
	685ZZ	11	5	0.15	150	282	43000	6.2	9.8	0.15	1.1	1.96
	695ZZ	13	4	0.2	200	430	40000	6.6	11.4	0.2	2.4	2.4
	605ZZ	14	5			505	39000	6.6	12.4	0.2	3.5	3.5
	625ZZ	16	6			680	37000	7	14		4.8	4.8
	635ZZ	19	6	0.3	300	885	34000	7	17	0.3	8	8.89
	676ZZ	10	3	0.1	496	218	45000	7.04	9.3	0.1	0.7	0.7
	686ZZ	13	5	0.15	1080	440	39000	7	11.8	0.2	1.9	2.69
	696ZZ	15	5	0.2	1350	530	37000	7.6	13.4	0.2	3.8	3.8
	606ZZ	17	6			2190	38000	8	17		6	6
	626ZZ	19	6	0.3	2340	885	34000	8	17	0.3	8.1	8.1
	636ZZ	22	7			3333	30000	8	20		14.5	14.5
	687ZZ	14	5	0.15	1170	505	37000	8.2	12.8	0.15	2.97	2.97
	697ZZ	17				1610	715	36000	9	17	0.3	7.51
	607ZZ	19	6	0.3	2240	910	34000	9	17	0.3	8	8
	627ZZ	22	7			3350	1400	32000	10	22		17
	678ZZ	12	3.5	0.1	543	274	40000	8	11.33	0.1	0.99	0.99
	688ZZ	16	5	0.2	1610	1400	35000	9.6	14.4	0.2	3.1	3.1
	698ZZ	19	6			1990	865	33000	10	22		17
	608ZZ	22	7	0.3	3350	1400	32000	10	22	0.3	12	12
	628ZZ	24	8			4000	1590	31000	10	22		17
	638ZZ	28	9			4560	1983	28000	11	26		30.3
	689ZZ	17	5	0.2	1720	820	33000	10.6	15.4	0.2	3.2	3.2
	699ZZ	20	6	0.3	2480	1090	32000	11	18		8.2	8.2
	609ZZ	24	7	0.3	3400	1450	31000	11	22	0.3	14	14
	629ZZ	26	8	0.6	4550	1960	30000	13	22		20	20

① 1KgF=9.81N

型号		d	D	B	r1 (min)	基本额定负载(N)		极限转速 rpm(参考)	安装尺寸			重量(g) (参考)
代码	轴承型号					Cr(动)	Cor(静)		db (min)	da (max)	r (max)	
BAF...-E-SUS	682ZZ	5	2.3	0.08	143	40	85000	2.7	3.9	0.08	0.17	0.17
	692ZZ	6	3	0.15	281	79	75000	3	4.8	0.15	0.38	0.38
	602ZZ	7	3.5			328	102	60000	3.2	5.8	0.15	0.58
	682AZZ	6	2.6	0.08	178	59	71000	3.7	4.9	0.08	0.29	0.29
	692AZZ	7	3.5	0.15	328	102	63000	3.85	5.65	0.15	0.55	0.55
	673ZZ	6	2.5	0.08	242	94	71000	3.6	5.4	0.08	0.2	0.2
	683ZZ	7	3	0.1	390	130	63000	3.9	5.8	0.1	0.33	0.45
	693ZZ	8	4			560	180	60000	4.2	7.8	0.15	1.13
	603ZZ	9	5	0.15	571	189	56000	4.2	7.8	0.15	0.92	1.13
	623ZZ	10	4			640	224	50000	4.6	8.8		1.6
	633ZZ	13	5	0.2	1301	488	40000	4.6	11.4	0.2	3.43	3.43
	674ZZ	7	2.5	0.08	222	88	60000	6.4	0.08	0.28		0.28
	684ZZ	9				640	224	53000	5	7.8	0.1	1.01
	694ZZ	11	4	0.15	715	276	48000	5.2	9.8	0.15	1.8	1.8
	604ZZ	12		0.2	957	350		5.6	10.4	0.2	2.34	2.34
	624ZZ	13	5		1310	490	40000	5.6	11.4	0.2	3.2	3.2
	634ZZ	16	6	0.3	1340	523	36000	6	14	0.3	5.44	5.44
	675ZZ	8	2.5	0.1	218	131	53000	5.8	7.4	0.1	0.34	0.34
	685ZZ	11	5	0.15	715	282	45000	6.2	9.8		1.96	1.96
	695ZZ	13	4	0.2	1080	430	43000	6.6	11.4	0.2	2.4	2.4
	605ZZ	14	5		1330	505	40000	6.6	12.4		3.5	3.5
	625ZZ	16	6		1760	680	36000	7	14		4.8	4.8
	635ZZ	19	6	0.3	2336	896	32000	7	17	0.3	8.89	8.89
	676ZZ	10	3	0.1	496	218	45000	7.04	9.3	0.1	0.7	0.7
	686ZZ	13	5	0.16	1080	440	40000	7	11.8	0.2	1.9	2.69
	696ZZ	15	5	0.2	1350	530	37000	7.6	13.4	0.2	3.8	3.8
	606ZZ	17	6		2190	865	38000	8	17		6	6
	626ZZ	19	6	0.3	2340	885	32000	8	17	0.3	8.1	8.1
	636ZZ	22	7		3333	1423	30000	8	20		14.5	14.5
	687ZZ	14	5	0.15	1170	505	40000	8.2	12.8	0.15	2.97	2.97
	697ZZ	17			1610	710		9	17		5.12	5.12
	607ZZ	19	6	0.3	2340	885	36000	9	17	0.3	7.51	7.51
	627ZZ	22	7		3300	1370	30000	10	22		12.9	12.9
	678ZZ	12	3.5	0.1	543	274	40000	8	11.33	0.1	0.99	0.99
	688ZZ	16	5	0.2	1610	715	36000	9.6	14.4	0.2	4.02	4.02
	698ZZ	19	6		1990	865		10	22		7.3	7.3
	608ZZ	22	7	0.3	3350	1400	34000	10	22	0.3	12	12
	628ZZ	24	8		4000	1590	28000	10	22		17	17
	638ZZ	28	9		4560	1983		11	26		30.3	30.3
	689ZZ	17	5	0.2	1720	820	33000	10.6	15.4	0.2	3.2	3.2
	699ZZ	20	6	0.3	2480	1090	32000	11	18		8.2	8.2
	609ZZ	24	7	0.3	3400	1450	31000	11	22	0.3	14	14
	629ZZ	26	8	0.6	4550	1960	30000	13	22		20	20

① 1KgF=9.81N



请按图示订货

型号		d
代码	轴承型号	
BAF...-E	682ZZ	2
BAF...-E	692ZZ	
BAF...-E	602ZZ	

BAF682ZZ-E



未税价(元)

● 优惠价

数量	1~9	10~
价格	100%	另行报价



交货期
5



Example
使用示例



- ① 深沟球轴承装配在导向块上, 对其他工件起到导向的作用。