


定位柱

长行程不锈钢型

无防松型 金属销/树脂销

代码	类型	载荷	主体材质	销材质	销硬度	使用环境温度
ZAP04	长行程 不锈钢型	超轻载	相当 SUS304	SUS440C	55HRC~	-30~150℃
ZAP01		轻载				
ZAP02		重载				
ZAP03		超重载				
ZAP09		超轻载				
ZAP06	树脂销	轻载	聚缩醛	—	—	-30~80℃
ZAP07		重载				
ZAP08		超重载				

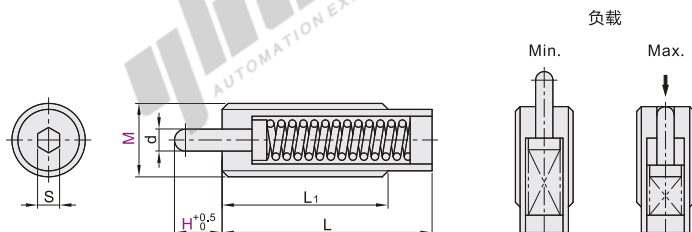

① 当 $L=L_1$ 时，主体为全螺纹(尾部无台阶)。

② 未进行防松动处理。

③ 负载min.表示初始负载，max.表示凸销最大压入限度时的负载。

视角标准：第一视角

代码	型号	M	H	d	L	L ₁	S	负载(N)							
								超轻载		轻载		重载		超重载	
								min.	max.	min.	max.	min.	max.	min.	max.
金属销 ZAP04 ZAP01 ZAP02 ZAP03	3	1.5	1	15	15	0.9	0.9	0.11	0.5	0.4	1.3	0.8	2.94	1.1	3.42
								0.11	0.5	0.2	1.3	0.6	2.93	0.8	3.41
	4	2	1.6	24	24	1.3	1.3	0.26	0.75	0.9	2	2	8.8	6.1	13.8
								0.17	0.75	0.6	2.1	1.9	8.75	5.8	13.6
	5	3	2	20	20	1.5	1.5	0.39	3.1	1.4	9.7	2.7	16.3	6.8	22
								0.34	3.1	1.1	10.3	1	17.1	5.7	21.5
	6	3	2.5	25	25	2	2	1.79	3.15	6	9.8	8	26.4	15.8	35.6
								1.49	3.15	3.4	9.86	4.4	26.6	12.9	34.4
	8	3	3.1	25	25	2.5	2.5	1.89	3.25	6	9.9	14.7	27	21.9	36.3
								1.39	3.25	4	9.83	6.7	26.6	14.7	34.5
树脂销 ZAP09 ZAP06 ZAP07 ZAP08	10	5	3.8	30	30	3	3	1.59	4.7	5.7	14.7	8.2	45.7	24.5	58.6
								1.59	4.7	4.4	14.7	6.2	45.1	19.8	58.7
	12	5	5.5	30	30	4	4	1.69	4.8	5.8	14.7	18.2	49	34.9	63.6
								1.59	4.8	5	14.7	8.2	49.1	25.5	63.6
	15	10	8	43	43	5	5	1.79	4.8	6.9	14.7	7.5	48.9	20.1	63.7
								2.79	10.9	9.2	34.2	18.9	68.5	38.7	88.4
	16	15	8	57	57	5	5	2.59	10.9	8.6	34.4	14.4	68.6	33.9	88.1
								1.99	11.1	7.1	34.4	4.2	68.6	25.4	88.1

kgf=N×0.101972



型号	M	H
ZAP01	3	3
ZAP02	4	2

ZAP01—M3—H3




数量	1~9	10~
价格	100%	另行报价



交货期
7



示例(一): 用于防止油粘附



示例(二): 用于顶出产品

