



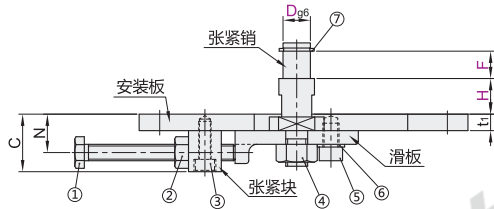


代码	类型	材质			表面处理
		安装板	张紧销	滑板	
VSK11	调整螺丝型	SS400	S45C	SS400	发黑
VSK12					无电解镀锌

特点：从动部、中间部皆可使用的螺丝调整型张力调整装置。

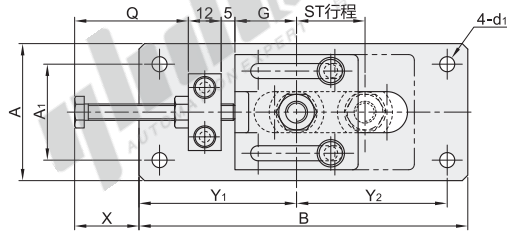

张紧销

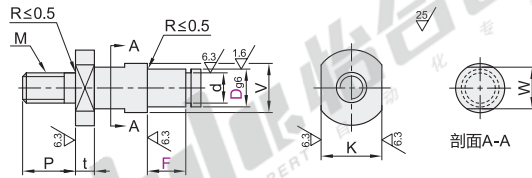

视角标准：第一视角

型号		最小单位1		ST行程	A	A ₁	B	C	G	Q	t ₁	X	Y ₁	Y ₂	N	d ₁
代码	D _{g6}	H	F													
VSK11	10	10~50	8~50	25	50	35	120	21	22.5	42.1	6	24	57.5	55	14	5.5
	12															
VSK12	15	12~60	10~50	25	55		125		25.5			31	60	57.5		
	17			30	60	40	140	29	27	48.6	9	30	62.5	70	19	6.6
	20															

张紧销详细尺寸

D _{g6}	V	d	t	P	K	W	M
10	13	9.6				11	M8
12	15	11.5	5	13	15	13	
15	20	14.3		16	20	17	M10
17	22	16.2	8	17	24	19	M12
20	24	19				22	

VSK11附件

D _{g6}	①调整螺丝	②螺母	③(2个)内六角螺钉	④螺母	⑤(2个)内六角螺钉	⑥(2个)平垫圈	⑦C型挡圈
10	M6×55	TBK52-M6	TAC01-M4-L16	TBK52-M8	TAC01-M5-L10	TBN01-5	TBP01-10
12							TBP01-12
15				TBK52-M10	TAC01-M5-L14		TBP01-15
17	M8×60	TBK52-M8	TAC01-M5-L22	TBK52-M12	TAC01-M6-L16	TBN01-6	TBP01-17
20							TBP01-20

VSK12附件

D _{g6}	①调整螺丝	②螺母	③(2个)内六角螺钉	④螺母	⑤(2个)内六角螺钉	⑥(2个)平垫圈	⑦C型挡圈
10							TBP02-10
12	M6×55	TBK55-M6	TAC21-M4-L16	TBK55-M8	TAC21-M5-L10	TBN02-5	TBP02-12
15				TBK55-M10	TAC21-M5-L14		TBP02-15
17	M8×60	TBK55-M8	TAC21-M5-L22	TBK55-M12	TAC21-M6-L16	TBN02-6	TBP02-17
20							TBP02-20



型号	最小单位1		
代码	D	H	F
VSK11	10	10~50	8~50
VSK12	12		

VSK12—D10—H30—F15



数量	1~9	10~
价格	100%	另行报价



交货期
10