


代码		类型	D公差	材质		表面处理
带挡圈	不带挡圈			国标	相当	
MAD01	MAL01	带挡圈槽型	g6	45	S45C	发黑
MAD02	MAL02			0Cr18Ni9	SUS304	无电解镀镍
MAD11	MAL11			35CrMo	SCM435	发黑
MAD21	MAL21		h7	硬度28~33HRC	—	无电解镀镍
MAD22	MAL22			45	S45C	发黑
MAD31	MAL31			0Cr18Ni9	SUS304	—
MAD32	MAL32	带挡圈槽型	h7	45	S45C	发黑
MAD41	MAL41			0Cr18Ni9	SUS304	—
MAD51	MAL51		h9	45	S45C	发黑
MAD52	MAL52			0Cr18Ni9	SUS304	—
MAD61	MAL61					



6.3

- ① 圆度·直线度·垂直度·同轴度，请参阅转轴产品简介。
② 挡圈槽m详细尺寸，请参阅转轴产品简介。

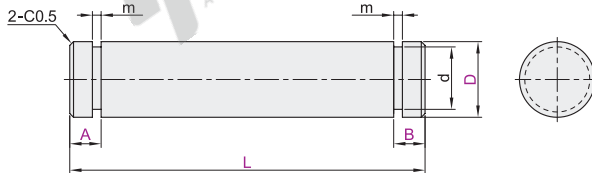

g6

型号		D _{g6}	最小单位0.1 L	最小单位1 A·B	挡圈型号 (2个)
代码					
带挡圈	2	-0.002	18.0~50.0		E型1.2
	2.5	-0.008	18.0~150.0	3≤A<L/2	E型1.5
	3		18.0~200.0	3≤B<L/2	E型2
	4		18.0~250.0		E型3
	5	-0.004	18.0~300.0		E型4
	6	-0.012	18.0~400.0	4≤A<L/2	E型5
	8	-0.005	18.0~500.0	4≤B<L/2	E型7
	10	-0.014	35.0~600.0		C型10
	12		45.0~700.0		C型12
	13		45.0~800.0		C型13
不带挡圈	15	-0.006	65.0~800.0	5≤A<L/2	C型15
	16	-0.017	75.0~800.0	5≤B<L/2	C型16
	17				C型17
	18				C型18
	20				C型20
	22	-0.007			C型22
	25	-0.020			C型25
	30				C型30
	35	-0.009			C型35
	40	-0.025			C型40
	50				C型50

h7

型号		最小单位0.1	最小单位1	挡圈型号 (2个)
代码	D _{h7}	L	A·B	
带挡圈 MAD31 MAD32 MAD41	6	18.0~300.0	3≤A<L/2 3≤B<L/2	E型5
	8	18.0~400.0	4≤A<L/2	E型7
	10	20.0~500.0	4≤B<L/2	C型10
	12	35.0~600.0	5≤A<L/2	C型12
	15	45.0~700.0	5≤A<L/2	C型15
	20	65.0~800.0	5≤B<L/2	C型20
不带挡圈 MAL31 MAL32 MAL41	25			C型25
	30	75.0~800.0	6≤A<L/2	C型30
	35		6≤B<L/2	C型35
	40			C型40
	50	95.0~800.0		C型50



代码	技术说明																																							
LA() LB()	增加1处平面LA() 增加2处平面LB()	选型方法 LA10-G3 选型方法 LB10-J3-Y10-X3 ① 最小单位1 ② 指定G-J-X时，须为50以下 ③ 适用于下表D规格																																						
	 LA() LB() G J() X() Y() H	<table><tr><th>D</th><th>H</th></tr><tr><td>3~5</td><td>0.5</td></tr><tr><td>6~17</td><td>1</td></tr><tr><td>18~40</td><td>2</td></tr><tr><td>50</td><td>3</td></tr></table>	D	H	3~5	0.5	6~17	1	18~40	2	50	3																												
D	H																																							
3~5	0.5																																							
6~17	1																																							
18~40	2																																							
50	3																																							
KE()	增加扳手柄	选型方法 KE5 ① 最小单位1 ② 适用于右表D规格																																						
	 KE() V W	<table><tr><th>D</th><th>W</th><th>V1</th></tr><tr><td>6</td><td>5</td><td>6</td></tr><tr><td>8</td><td>7</td><td></td></tr><tr><td>10</td><td>8</td><td></td></tr><tr><td>12</td><td>10</td><td></td></tr><tr><td>15</td><td>13</td><td></td></tr><tr><td>17</td><td>14</td><td>12</td></tr><tr><td>20</td><td>17</td><td></td></tr><tr><td>25</td><td>22</td><td></td></tr><tr><td>30</td><td>27</td><td></td></tr><tr><td>35</td><td>30</td><td>16</td></tr><tr><td>40</td><td>36</td><td></td></tr><tr><td>50</td><td>41</td><td>20</td></tr></table>	D	W	V1	6	5	6	8	7		10	8		12	10		15	13		17	14	12	20	17		25	22		30	27		35	30	16	40	36		50	41
D	W	V1																																						
6	5	6																																						
8	7																																							
10	8																																							
12	10																																							
15	13																																							
17	14	12																																						
20	17																																							
25	22																																							
30	27																																							
35	30	16																																						
40	36																																							
50	41	20																																						
KB() KC()	增加1处键槽KB() 增加2处键槽KC()	选型方法 KB50-S10 选型方法 KC50-C8-K40-T10 ① 最小单位1 ② KB(C)K=0, KB(S)2, KC(C)+T+K2, 键槽如右图形状																																						
	 KB() S() KC() C() T() K() V	③ 指定S-T-C时，须为100以下 ④ 需要3处键槽时，请同时选择KB与KC ⑤ 适用于D6以上规格 ⑥ 键槽详情请见转轴产品简介。																																						
KD()	增加开口凸轮用槽	选型方法 KD10 ① 最小单位1 ② 适用于右表D规格																																						
	 KD() V2 d	<table><tr><th>D</th><th>d</th><th>V2</th></tr><tr><td>3</td><td>2</td><td></td></tr><tr><td>4</td><td>3</td><td></td></tr><tr><td>5</td><td>4</td><td>4</td></tr><tr><td>6</td><td>5</td><td></td></tr><tr><td>8</td><td>7</td><td></td></tr><tr><td>10</td><td>8</td><td>5</td></tr><tr><td>12</td><td>10</td><td></td></tr></table>	D	d	V2	3	2		4	3		5	4	4	6	5		8	7		10	8	5	12	10															
D	d	V2																																						
3	2																																							
4	3																																							
5	4	4																																						
6	5																																							
8	7																																							
10	8	5																																						
12	10																																							

h9

型号		D _{h9}	最小单位0.1 L	最小单位1 A·B	挡圈型号 (2个)
代码					
带挡圈	3	0	18.0~150.0		E型2
	4	-0.025	18.0~200.0	3≤A<L/2	E型3
	5	0	18.0~250.0	3≤B<L/2	E型4
	6	-0.030	18.0~300.0		E型5
	8	0	18.0~400.0	4≤A<L/2	E型7
	10	-0.036	20.0~500.0	4≤B<L/2	C型10
	12	0	35.0~600.0	5≤A<L/2	C型12
	15	-0.043	45.0~700.0	5≤B<L/2	C型15
	20	0	65.0~800.0		C型20
	25	-0.052			C型25
不带挡圈	30	0	75.0~800.0	6≤A<L/2	C型30
	35	0		6≤B<L/2	C型35
	40	-0.062			C型40
	50		95.0~800.0		C型50



型号	D	L	A·B
MAD01	2	18.0~50.0	3≤A<L/2
MAD02	3	18.0~150.0	3≤B<L/2

MAD02—D2—L30—A12—B12

① 可选加工

型号	D	L	A·B	可选加工代码
MAD01	2	75~800	6≤A<L/2	LA() LB() KE()
MAD02	3		6≤B<L/2	KB() KC() KD()

MAD02—D25—L200—A30—B30—KB50-S10



● 优惠价
数量 1~9 10~
价格 100% 另行报价

交货期 3

交货期 5

① 无表面处理

② 有表面处理