


代码	类型	材质	颜色	防护等级	阻燃等级	工作温度
ZIG20	快速接头	直接型	尼龙66	IP68	UL94V-2	-40℃ ~ +120℃
ZIG21		90°弯接型				

CE




特点：特殊夹紧爪之设计，夹紧浪管抗拉力强，超快速拔插装卸，提高安装效率。

直接型
ZIG20

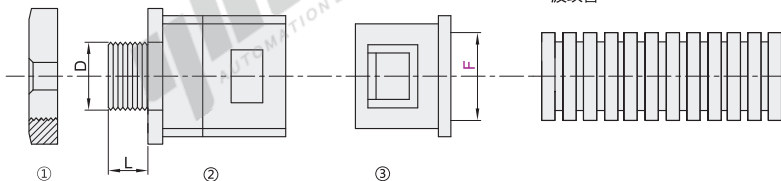

90°弯接型
ZIG21

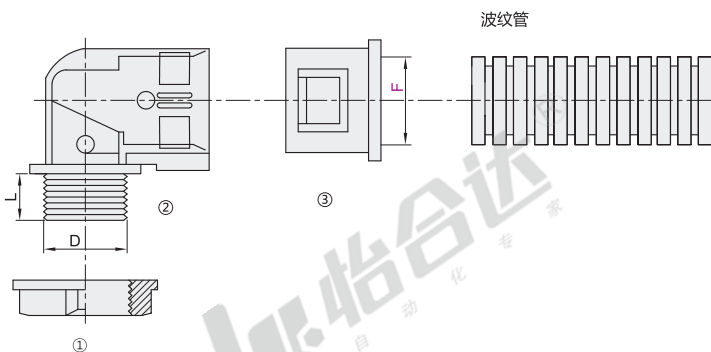

本产品不包含波纹管，波纹管需要另外购买。

视图标准：第一视角

直接型

	型号	螺纹规格	螺纹	螺纹外径 D	螺纹长度 L
代码	适配软管尺寸F				
ZIG20	10	M12	M12×1.5	12	8.5
	13	M16	M16×1.5	16	10
	15.8	M18	M18×1.5	18	12.5
	18.5	M20	M20×1.5	19.7	12.5
	21.2			20	13
	25	M25	M25×1.5	25	13
	28.5				
	34.5	M32	M32×1.5	32	14
	42.5	M40	M40×1.5	40	15
	54.2	M50	M50×1.5	50	16
	54.2	M63	M63×1.5	63	16
	10	PG7	PG7	12.4	8.5
	13	PG9	PG9	15.2	10
	15.8	PG11	PG11	18.4	12.5
	18.5	PG13.5	PG13.5	20	12.4
	21.2	PG16	PG16	22.5	13
	28.5	PG21	PG21	28.3	13
	34.5	PG29	PG29	37	14
42.5	PG36	PG36	47	15	
54.5	PG48	PG48	59.3	16	

90°弯接型

	型号	螺纹规格	螺纹	螺纹外径 D	螺纹长度 L
代码	适配软管尺寸F				
ZIG21	10	M12	M12×1.5	12	8.5
	13	M16	M16×1.5	16	10
	15.8	M18	M18×1.5	18	12.5
	18.5	M20	M20×1.5	19.7	12.5
	21.2			20	13
	25	M25	M25×1.5	25	13
	28.5				
	34.5	M32	M32×1.5	32	14
	42.5	M40	M40×1.5	40	15
	54.2	M50	M50×1.5	50	16
	10	PG7	PG7	12.5	10
	13	PG9	PG9	15.2	10
	15.8	PG11	PG11	20.4	12.5
	18.5	PG13.5	PG13.5	20	12.4
	21.2	PG16	PG16	22.5	13
	28.5	PG21	PG21	28.3	13
	34.5	PG29	PG29	37	14.5
42.5	PG36	PG36	47	15	
54.5	PG48	PG48	59.3	16	



请按图示订货

直接型

代码	型号	适配软管尺寸F	螺纹规格
ZIG20	10	M12	M12
	13	M16	M16

ZIG20—F10—M12

90°弯接型

代码	型号	适配软管尺寸F	螺纹规格
ZIG21	10	M12	M12
	13	M16	M16

ZIG21—F10—M12