

圆弧型 ▶
L=25~100

平皮带用惰轮


代码	类型		材质		表面处理
			国标	相当	
Y-EKB26	圆弧型	无法兰型	LD30	A6061	喷细砂本色阳极氧化
Y-EKB27			蓝色POM	蓝色POM	—

① 3D模型仅供参考，具体尺寸请以参数表为准，注意选型。



RoHS

轴承精度：GB/T 307.1 0 级
相当于：JIS B 1514 0 级

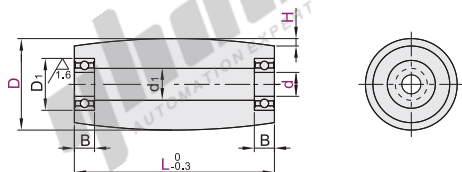

6.3

② 轴承采用压入式。

视角标准：第一视角

型号		d	最小单位1 L	H	d ₁	轴承尺寸		
代码	D					型号	D ₁	B
Y-EKB26 Y-EKB27	15	5	25~100	0.3	7	675ZZ	8	2.5
		6			9	676ZZ	10	3
		6			10	686ZZ	13	5
	20	8			10	678ZZ	12	3.5
		6			10	696ZZ	15	5
	25	8			10	688ZZ	16	5
		8			15	698ZZ	19	6
		10			15	6900ZZ	22	6
	30	12			17	6901ZZ	24	6
		10			17	6900ZZ	22	6
		12			17	6901ZZ	24	6
	35	15			22	6902ZZ	28	7
		8			22	628ZZ	24	8
		10			22	6000ZZ	26	8
	40	12			22	6901ZZ	24	6
		15			22	6902ZZ	28	7
		20			22	6804ZZ	32	7
	50	10			17	6200ZZ	30	9
		12			22	6001ZZ	28	8
		15			17	6902ZZ	28	7
	60	20			27	6904ZZ	37	9
		25			27	6905ZZ	42	9
		12			22	6201ZZ	32	10
	80	15			22	6002ZZ	32	10
		20			32	6904ZZ	37	9
		25			32	6905ZZ	42	9
		30			41	6906ZZ	47	15
		25			41	6205ZZ	52	15
		30			41	6006ZZ	55	13
		35			41	6907ZZ	55	10



请按图示订货

型号		d	L	H
代码	D			
Y-EKB26	15	5	25~100	0.3
Y-EKB27	6	6	0.5	0.5

Y-EKB26—D15—d6—L50—H0.3



未税价(元)

● 优惠价	数量	1~9	10~
	价格	100%	另行报价

滚
滑
轮
惰
轮