


微型带凸缘深沟球轴承

双面带防尘盖式

经济型

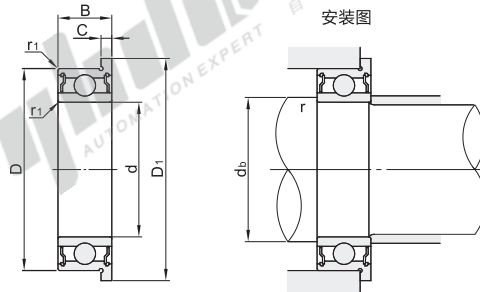

安装图

- ① 经济型适合中低转速、低载荷。
- ② 不承诺品牌。



视角标准：第一视角

型号		d	D	B	D ₁	C	r ₁ (min)	基本额定负载(N)		极限转速 rpm (参考)	安装尺寸		重量 (g) (参考)	
代码	轴承型号							Cr(动)	Cor(静)		d _b (min)	r (max)		
BAL....-E BAL....-E-SUS	682ZZ	2	5	2.3	6.1	0.6	0.08	135	40	68000	2.7	0.08	0.23	
	692ZZ			3	7.5		0.15	264	79	60000	3	0.15	0.44	
	682AZZ		2.5	6	2.6	7.1	0.8	0.08	167	59	56000	3.7	0.08	0.41
	692AZZ			7	3.5	8.5	0.9	0.15	308	103	50000	3.85	0.15	0.67
	673ZZ			6	2.5	7.2	0.6	0.08	193	75	56000	3.6	0.08	0.25
	683ZZ	3	7	3	8.1	0.8	0.1	312	104	50400	3.9	0.1	0.52	
	693ZZ		8	4	9.5	0.9		448	144	48000			0.71	
	603ZZ		9	5	10.5		0.15	456	151	4400	4.2	0.15	1.6	
	623ZZ		10	4	11.5	1		512	179	40000			1.79	
	674ZZ		7	2.5	8.2	0.6	0.08	177	70	48000	4.6	0.08	0.34	
	684ZZ	4	9		10.3		0.15	512	179	42000	5	0.1	1.13	
	694ZZ		11	4	12.5			572	220		5.2	0.15	2	
	604ZZ		12		13.5	1		765	280	38000			2.56	
	624ZZ		13	5	15		0.2	1048	392	32000	5.6	0.2	3.49	
	675ZZ		8	2.5	9.2	0.6	0.08	173	72	42000		0.08	0.39	
	685ZZ	5	11	5	12.5		0.15	572	225	36000	6.2	0.15	2.17	
	695ZZ		13	4	15		0.2	864	344	34000	6.6	0.2	2.69	
	605ZZ		14		16			1064	404	32000			3.89	
	625ZZ		16	5	18		0.3	1383	540	28000	7.7	0.3	5.51	
	676ZZ		10	3	11.2	0.6	0.1	372	156	36000	6.6	0.1	0.73	
	686ZZ	6	13		15	1.1	0.15	864	352		7	0.15	3.03	
	696ZZ		15	5	17	1.2	0.2	1080	424	32000	7.6	0.2	4.29	
	606ZZ		17		19		0.3	1752	692	30000	8	0.3	6.49	
	626ZZ		19		22	1.5		1868	716	25000			9.77	
	678ZZ		12	3.5	13.6	0.8	0.1	412	201	32000	8.8	0.1	0.85	
	688ZZ	8	16	5	18	1.1	0.2	1288	572		9.6	0.2	4.46	
	698ZZ		19	6	22		0.3	1592	692	28000			8.39	
	608ZZ		22	7	25	1.5		2680	1120	2700	10	0.3	13	
	6700ZZ		15	4	16.5	0.8	0.15	684	348	12000	10.3	0.15	2.09	
	6800ZZ		19	5	21	1	0.3	1372	672	29000	12		6.09	
	6900ZZ	10	22	6	25	1.5		2156	1018	27200	13.2	0.3	11.09	
	6701ZZ		18	4	19.5	0.8	0.2	740	424	10000	12.4	0.2	3.39	
	6801ZZ		21	5	23	1.1	0.3	1532	832	26000	14	0.3	7.09	
	6901ZZ		24	6	26.5	1.5		2308	1172	24000			13.19	
	6702ZZ		21	4	22.5	0.8	0.2	749	465	8800	15.4	0.2	3.89	
	6802ZZ	15	24	5	26	1.1		1658	1002	22000	17	0.3	8.29	
	6902ZZ		28	7	30.5	1.5	0.3	3456	1807	20000			19.89	
	6703ZZ		23	4	24.5	0.8	0.2	800	526	7600	17.4	0.2	4.39	
	6803ZZ		26	5	28	1.1		1786	1164	20000	19	0.3	8.89	
	6903ZZ		30	7	32.5	1.5	0.3	3670	2052	18000			21.39	
	6704ZZ	17	27	4	28.5	0.8	0.2	832	583	6800	20.4	0.2	6.29	
	6804ZZ		32	7	35	1.5		3212	1969	16000	22		19.79	
	6904ZZ*		37	9	40	2	0.3	51048	2945	15000		0.3	42.79	
	6805ZZ		7			1.5		3442	2345	14000			26.09	
	6905ZZ		42	9	45	2		5600	3632	12000	27		50.19	

① 带*规格仅适用SUJ2材质。

① 1Kg=9.81N



请按图示订货

代码	轴承型号	d	D
BAL....-E	682ZZ	2	5
BAL....-E-SUS	692ZZ	2	6

BAL682ZZ-E



未税价(元)

数量	1~9	10~
价格	100%	另行报价



交货期
5