


代码	类型	材质	表面处理
TCC14	重载荷	合金钢	烤漆(橙色)



① 因烤漆工艺，可能会导致产品吊装处部分区域未能烤漆。

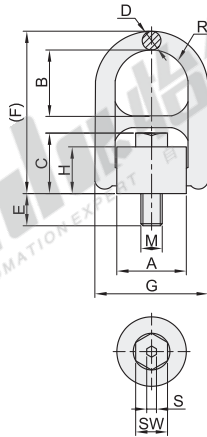

型号		M	安全系数	A	B	C	D	E	(F)	G	H	R	S	SW	净重 (kg)
TCC14	0.5T	8	4	33	35	30	10	12	85	56	23.5	17.5	6	13	0.3
	0.7T	10						15							
	1T	12						20							
	1.5T	14		50	55	46	13	21	130	85	36	27	8	18	1
	2T	16						24							
	2.5T	18		65	66	57	16	26	163	109	44	34.5	10	24	2
	3T	20						30							
	5T	24						36							
	5.6T	27		87	80	82.5	25	38	219	150	62.5	45.5	12	30	5.5
	7.8T	30						48							
9T	36	54	5.7												

工作极限载荷

吊环 安装方式	G		A		A		B		B		B		B	
	1	2	1	2	2	2	2	3~4	3~4	3~4	3~4	3~4	3~4	
吊环数量	1		2		1		2		2		2		2	
起吊角度	0°		0°		90°		90°		0~45°		45~60°		不对称	
型号	规格	螺纹	工作极限载荷(吨)											
TCC14	0.5T	M8	0.8	1.6	0.5	1	0.7	0.5	0.5	1.05	0.75	0.5	0.5	0.5
	0.7T	M10	1.2	2.4	0.7	1.4	0.98	0.7	0.7	1.47	1.05	0.7	0.7	0.7
	1T	M12	2	4	1	2	1.4	1	1	2.1	1.5	1	1	1
	1.5T	M14	2.4	4.8	1.5	3	2.1	1.5	1.5	3.15	2.25	1.5	1.5	1.5
	2T	M16	3.2	6.4	2	4	2.8	2	2	4.2	3	2	2	2
	2.5T	M18	5	10	2.5	5	3.5	2.5	2.5	5.25	3.75	2.5	2.5	2.5
	3T	M20	5.6	11.2	3	6	4.2	3	3	6.3	4.5	3	3	3
	5T	M24	9.2	18.4	5	10	7	5	5	10.5	7.5	5	5	5
	5.6T	M27	9.5	19	5.6	11.2	7.84	5.6	5.6	11.76	8.4	5.6	5.6	5.6
	7.8T	M30	12	24	7.8	15.6	10.92	7.8	7.8	16.38	11.7	7.8	7.8	7.8
9T	M36	12.5	25	8	16	11.2	8	8	16.8	12	8	8	8	



型号	代码	规格
TCC14	0.5T	0.7T
TCC14-0.5T		



优惠价	数量	1~9	10~
100%	价格	100%	另行报价

交货期	数量	1~9	10~
7	价格	100%	另行报价

