


# 钢球型独立导柱用配件

## ◀ 挡块/弹簧

### ☑ 挡块

代码	类型	材质		表面处理
		主体	挡块盖	
OFQ45	挡块	S45C	SPC-1	发黑

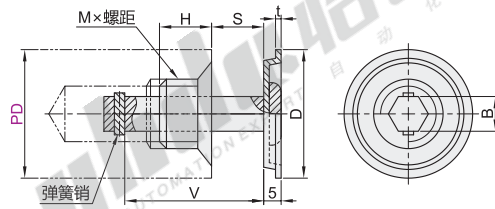

视角标准：第一视角

代码	型号		L 适用钢球衬套长度	S	V	D	M×螺距	H	B	t
	PD 适用导柱直径	PD								
OFQ45	20	50	0~20	32	24	M14×1.5	12	7		
	25	50	0~20	32	29	M16×1.5	12	8	1.6	
	32	60	0~25	40	37					
	38	70	0~29	44	44	M20×1.5	15	10		
	50	90	0~42	57	56					



请按图示订货

型号		L
代码	PD(适用导柱直径)	适用钢球衬套长度
OFQ45	20	50
	25	50

OFQ45—PD20—L50



未税价(元)

● 优惠价

数量	1~9	10~
价格	100%	另行报价





交货期

9

### ☑ 弹簧

代码	类型	材质
OFQ46	弹簧	SWP-B



视角标准：第一视角

① 压紧长度 =  $F \times d / \text{节距} + 2 \times d$

代码	型号		F	L 适用独立导柱长度	d	节距	D	D <sub>1</sub>
	PD 适用导柱直径	PD						
OFQ46	20	40	90					
		50	100					
		70	110					
		80	120	1	14	22.5	20.5	
		100	130					
		110	140					
	25	120	150					
		140	160					
		40	90					
		50	100					+1.0 0
		70	110					
		80	120					
	32	100	130					
		110	140	1.2	14	27.9	25.5	
		120	150					
		140	160					
		150	170					
		160	180					
38	180	200						
	50	110						
	60	120						
	70	130						
	90	140						
	110	150						
50	120	160						
	130	170	1.6	16	35.7	32.5	+1.5 0	
	140	180						
	170	200						
	190	220						
	210	240						
60	230	260						
	50	110						
	60	120						
	70	130						
	90	140						
	110	150						
60	120	160						
	130	170						
	150	180						
	170	190						
	180	200						
	230	260					+2.0 0	

代码	型号		F	L 适用独立导柱长度	d	节距	D	D <sub>1</sub>
	PD 适用导柱直径	PD						
OFQ46	38	60	130					
		70	140					
		80	150					
		90	160					
		110	170					
		120	180	2	18	42.5	38.5	+1.5 0
	50	150	200					
		170	220					
		190	240					
		210	260					
		230	300					
		70	170					
	60	90	180					
		110	200					
		140	220					
		170	240	2.6	20	55.7	50.5	
		190	260					
		230	300					
60	280	350						
	90	200						
	130	220						
	150	240						
	180	260	3.2	20	66.9	60.5		
	230	300						
250	350							



请按图示订货

型号		F
代码	PD(适用导柱直径)	
OFQ46	32	120
	32	130

OFQ46—PD32—F120



未税价(元)

● 优惠价

数量	1~9	10~
价格	100%	另行报价



交货期

9