

方形丝杠支座组件

支撑侧·日本轴承 低肩型 精密型

代码	类型	材质		表面处理
		①	②	③
J-LEB31	精密型	支撑侧	S45C	发黑

① 轴承已经封入适量锂皂基抗极压润滑脂。

② 轴承为双铁盖。

③ 使用JIS 6级的径向轴承、最适用于高精度、高速旋转用途。




构成零件

编号	零件名称	数量
①	轴承座本体	1
②	日本径向轴承 6级	1
③	C型挡圈	1




d6

d3~4
d8~25

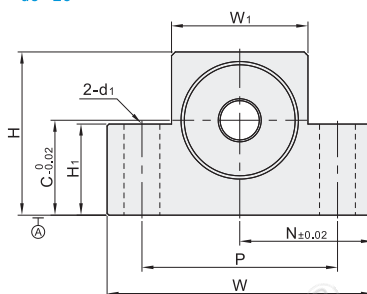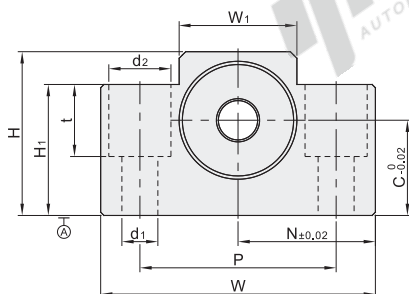

建议轴端加工尺寸

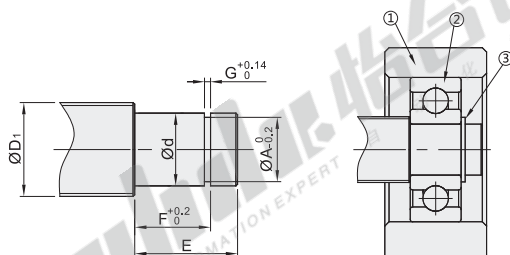

视角标准：第一视角

型号		Ød	T	W	H	C	W ₁	H ₁	P	Ød ₁	Ød ₂	t	N	建议轴端加工尺寸						使用 C型挡圈	
代码	规格													搭配丝杠轴径		轴端部外径		挡圈沟槽尺寸			
														ØD ₁	Ød	ØA	E	F	G		
J-LEB31	4	3		34	19	10	18	7	26				17	4	3 ^{-0.002 -0.010}	2.7	7	4.35	0.5	TBP01-3	
	5	4	10	36	21	11	20	8	28	4.5	—	—	18	5	4 ^{-0.002 -0.010}	3.7	8	5.35		TBP01-4	
	6	6	12	42	25	13	18	20	30	5.5	9.5	11	21	8	6 ^{-0.005 -0.012}	5.7	9	6.8	0.8	TBP01-6	
	8		14	52	32	17	25	26	38	6.6	11	12	26	10						TBP01-8	
	1022	8			40	22		21						12/14/15	8 ^{-0.005 -0.012}	7.6	10	7.9	0.9	TBP01-8	
	10			70	43	25	36	24	52	9			35								
	1223	10			41	23		22						14/15/16	10 ^{-0.005 -0.012}	9.6	11	9.15		TBP01-10	
	12			43	25	24															
	1526	15	20		46	26		21		11	—	—							1.15	TBP01-15	
	1528				48	28	41	23	60	9			40	18/20	15 ^{-0.005 -0.014}	14.3	13	10.15			
	15					49		25													
	15B						30		25												
	20	20	26	95	58		56		75	11				47.5	25/28/30	20 ^{-0.005 -0.014}	19	19	15.35	1.35	TBP01-20
	20B																				
	25	25	30	105	68	35	66	25	85					52.5	32/36	25 ^{-0.005 -0.014}	23.9	20	16.35		TBP01-25



请按图示订货

代码	规格	Ød	T
J-LEB31	6	6	12
	8	8	14

J-LEB31 — 6



未税价(元)

数量	1~4	5~
价格	100%	另行报价



交货期
7