


角接触球轴承

双列组合型 背对背配对型

C&U



安装图

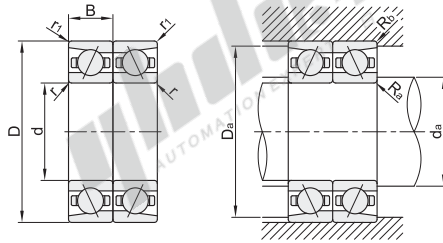

视角标准：第一视角

型号	主要尺寸(mm)					基本额定载荷(KN)		极限转速(rpm)		安装相关尺寸(mm)				重量(g)
	d	D	B	r(min)	r ₁ (min)	Cr(动)	Cor(静)	脂润滑	油润滑	d _a (min)	D _a (max)	R _a (max)	R _b (max)	
7000AC/P5DB-C&U	10	26	8	0.3	0.15	8.33	4.82	30000	40000	12.5	24.5	0.3	0.15	46
7200AC/P5DB-C&U	10	30	9	0.6	0.3	10.08	5.7	27600	36800	15	27.5	0.6	0.3	58
7200B/P5DB-C&U	10	30	9	0.6	0.3	8.07	4.98	18000	24000	15	27.5	0.6	0.3	58
7001AC/P5DB-C&U	12	28	8	0.3	0.15	9.04	5.58	27000	36000	14.5	26.5	0.3	0.15	50
7201AC/P5DB-C&U	12	32	10	0.6	0.3	12.41	7.46	25200	33600	17	29.5	0.6	0.3	70
7201B/P5DB-C&U	12	32	10	0.6	0.3	12.04	8.62	16200	21600	17	29.5	0.6	0.3	72
7301B/P5DB-C&U	12	37	12	0.3	0.6	14.32	8.38	16600	20800	18	33.5	1	0.5	90
7002C/P5DB-C&U	15	32	9	1	0.15	10.11	6.78	27000	36000	17.5	30.5	0.3	0.15	70
7002AC/P5DB-C&U	15	32	9	1	0.15	9.67	6.48	22800	30400	17.5	30.5	0.3	0.15	70
7202AC/P5DB-C&U	15	35	11	0.6	0.3	11.97	7.8	22200	29600	20	32.5	0.6	0.3	92
7202B/P5DB-C&U	15	35	11	0.6	0.3	12.85	8.62	14400	19200	20	32.5	0.6	0.3	94
7003C/P5DB-C&U	15	37	12	0.3	0.6	10.71	7.62	24000	32000	19.5	33.5	0.3	0.15	90
7003AC/P5DB-C&U	15	37	12	0.3	0.6	10.21	7.3	21000	28000	19.5	33.5	0.3	0.15	92
7203AC/P5DB-C&U	17	40	12	0.6	0.3	17.01	11.32	19200	25600	22	37.5	0.6	0.3	128
7203B/P5DB-C&U	17	40	12	0.6	0.3	16.09	11.08	12600	16800	22	37.5	0.6	0.3	132
7303AC/P5DB-C&U	17	47	14	1	0.6	24.62	15.98	16200	21600	23	43.5	1	0.5	214
7303B/P5DB-C&U	17	47	14	1	0.6	23.98	16.04	12000	16000	23	43.5	1	0.5	218
7004C/P5DB-C&U	20	42	12	0.6	0.3	17.98	13.12	20400	27200	25	39.5	0.6	0.3	158
7004AC/P5DB-C&U	20	42	12	0.6	0.3	17.17	12.54	17400	23200	25	39.5	0.6	0.3	160
7204C/P5DB-C&U	20	47	14	1	0.6	23.49	16.1	19200	25600	26	43.5	1	0.5	196
7204AC/P5DB-C&U	20	47	14	1	0.6	22.68	15.54	16200	21600	26	43.5	1	0.5	200
7204B/P5DB-C&U	20	47	14	1	0.6	21.55	15.26	10800	14400	26	43.5	1	0.5	204
7005C/P5DB-C&U	25	47	12	0.6	0.3	18.95	14.88	17400	23200	30	44.5	0.6	0.3	182
7005AC/P5DB-C&U	25	47	12	0.6	0.3	17.98	14.16	15000	20000	30	44.5	0.6	0.3	186
7205C/P5DB-C&U	25	52	15	1	0.6	26.89	20.4	16800	22400	31	48.5	0.6	0.3	244
7205AC/P5DB-C&U	25	52	15	1	0.6	25.76	19.54	14400	19200	31	48.5	0.6	0.3	250
7205B/P5DB-C&U	25	52	15	1	0.6	23.98	18.78	9600	12800	31	48.5	0.6	0.3	258
7305AC/P5DB-C&U	30	62	17	1.1	0.6	40.82	28.2	12000	16000	32	57	0.6	0.3	460
7305B/P5DB-C&U	30	62	17	1.1	0.6	39.53	27.4	9000	12000	32	57	0.6	0.3	468
7006C/P5DB-C&U	30	55	13	0.6	0.3	24.46	20.5	15000	20000	36	51.5	0.6	0.3	266
7006AC/P5DB-C&U	30	55	13	0.6	0.3	23.33	19.6	12600	16800	36	51.5	0.6	0.3	270
7206C/P5DB-C&U	30	62	16	1	0.6	37.26	29.4	13800	18400	36	58.5	1	0.5	380
7206AC/P5DB-C&U	30	62	16	1	0.6	35.8	28.2	12000	16000	36	58.5	1	0.5	386
7206B/P5DB-C&U	30	62	16	1	0.6	33.21	27	8400	11200	36	58.5	1	0.5	394
7306B/P5DB-C&U	30	72	19	1.1	0.6	50.38	38.6	7800	10400	37	67	0.6	0.3	704
7007C/P5DB-C&U	35	62	14	1	0.6	30.94	27.4	13000	18000	41	58.5	0.6	0.3	360
7007AC/P5DB-C&U	35	62	14	1	0.6	29.48	25.2	11000	15000	41	58.5	0.6	0.3	360
7207AC/P5DB-C&U	35	72	17	1.1	0.6	47.14	38.2	10000	14000	42	67	0.6	0.3	562
7207B/P5DB-C&U	35	72	17	1.1	0.6	43.9	36.8	6600	8800	42	67	0.6	0.3	574
7307AC/P5DB-C&U	40	80	21	1.5	1	59.94	49	9000	12000	43.5	74.5	1.5	0.8	924
7307B/P5DB-C&U	40	80	21	1.5	1	62.21	48.8	6600	8800	43.5	74.5	1.5	0.8	938
7008C/P5DB-C&U	40	68	15	1	0.6	33.37	31.8	11000	15000	46	64.5	0.6	0.3	438
7008AC/P5DB-C&U	40	68	15	1	0.6	31.59	30.2	10000	14000	46	64.5	0.6	0.3	444
7208AC/P5DB-C&U	40	80	18	1.1	0.6	54.43	49.4	9000	12000	47	75	0.6	0.3	710
7208B/P5DB-C&U	40	80	18	1.1	0.6	52	46	8600	11500	47	75	0.6	0.3	750
7308AC/P5DB-C&U	45	90	23	1.5	1	63.18	51.6	7500	10000	48.5	84.5	1.5	0.8	1250
7308B/P5DB-C&U	45	90	23	1.5	1	72.58	60.4	5900	7900	48.5	84.5	1.5	0.8	1272
7009C/P5DB-C&U	45	75	16	1	0.6	39.53	38.6	10500	14000	51	71.5	0.6	0.3	540
7009AC/P5DB-C&U	45	75	16	1	0.6	37.42	36.6	9000	12000	51	71.5	0.6	0.3	564
7209AC/P5DB-C&U	45	85	19	1.1	0.6	58.97	53.2	8200	11000	52	80	0.6	0.3	808
7209B/P5DB-C&U	45	85	19	1.1	0.6	58.32	52.6	5900	7900	52	80	0.6	0.3	820
7309AC/P5DB-C&U	45	100	25	1.5	1	107.57	88	7200	9600	53.5	94.5	1.5	0.8	1674
7309B/P5DB-C&U	45	100	25	1.5	1	94.45	80.2	5300	7100	53.5	94.5	1.5	0.8	1708

角接触球轴承

◀ 双列组合型 背对背配对型

型号	主要尺寸(mm)					基本额定载荷(KN)		极限转速(rpm)		安装相关尺寸(mm)				重量(g)
	d	D	B	r(min)	r ₁ (min)	Cr(动)	Cor(静)	脂润滑	油润滑	d _a (min)	D _a (max)	R _a (max)	R _b (max)	
7010C/P5DB-C&U	50	80	16	1	0.6	41.47	41.4	9600	12800	56	76.5	1	0.5	600
7010AC/P5DB-C&U						39.2	39.2	8400	11200					612
7210AC/P5DB-C&U		69.17	65	7500		10000	914							
7210B/P5DB-C&U		60.6	57.2	5400		7200	932							
7310C/P5DB-C&U		110	27	2	1	129.9	108.8	7800	10400	57	85	0.6	2140	
7310AC/P5DB-C&U						125.2	104.8	6600	8800				2180	
7310B/P5DB-C&U		90	18	1.1	0.6	110.5	95.8	4500	6000	62	85	1	0.6	2220
7011C/P5DB-C&U						69	58.2	8400	11200					420
7011AC/P5DB-C&U		55	100	21	1.5	55.9	55.2	7200	9600	63.5	94.5	1.5	0.8	428
7211AC/P5DB-C&U						81.8	76.4	7200	9600					1200
7211B/P5DB-C&U	120	29	2	1	75	72.2	4900	6600	65	114	2	1	1224	
7311C/P5DB-C&U					140.3	120	7200	9600					2740	
7311AC/P5DB-C&U	95	18	1.1	0.6	134.9	115.8	5900	7800	67	90	1	0.6	2780	
7311B/P5DB-C&U					127.7	112.6	4100	5500					2840	
7012AC/P5DB-C&U	60	110	22	1.5	1	59.9	62.8	7000	9300	68.5	104.5	1.5	0.8	956
7212AC/P5DB-C&U						94.3	92	6600	8800					1530
7212B/P5DB-C&U	130	31	2.1	1.1	90.9	88.8	4600	6100	72	123	2	1	1560	
7312AC/P5DB-C&U					154.4	134.6	5500	7300					3480	
7312B/P5DB-C&U	100	18	1.1	0.6	145.8	131	3800	5000	77	105	1	0.6	3540	
7013AC/P5DB-C&U					67.2	74.4	7800	10400					990	
7013AC/P5DB-C&U	65	120	23	1.5	1	63.7	70.8	6600	8800	73.5	114.5	1.5	0.8	1018
7213AC/P5DB-C&U						96.3	98.6	7200	9600					1890
7213B/P5DB-C&U	140	33	2.1	1.1	93.5	94.2	5900	7900	77	133	2	1	1924	
7313AC/P5DB-C&U					103	105.2	4200	5600					1962	
7313B/P5DB-C&U	110	20	1.1	0.6	174.8	154.8	5000	6700	82	143	2	1	4220	
7014AC/P5DB-C&U					164.9	150.8	3500	4700					4300	
7214AC/P5DB-C&U	70	125	24	1.5	1	80.8	91	6900	9200	78.5	119.5	1.5	0.8	1380
7214AC/P5DB-C&U						76.6	86.6	6000	8000					1410
7314AC/P5DB-C&U	150	35	2.1	1.1	117.5	121.2	5600	7500	82	143	2	1	2180	
7314B/P5DB-C&U					111.9	115.6	3900	5200					2220	
7015AC/P5DB-C&U	75	130	25	1.5	1	196.5	176.6	4700	6200	83.5	124.5	1.5	0.8	5120
7215AC/P5DB-C&U						185.3	172	3500	4600					5220
7215B/P5DB-C&U	115	20	1.1	0.6	78.6	92	5700	7600	87	120	1	0.6	1490	
7315B/P5DB-C&U					117	123	5400	7200					2340	
7016C/P5DB-C&U	80	140	26	2	1	111.1	116.6	3600	4800	87	153	2	1	2380
7016AC/P5DB-C&U						201.7	194.6	3200	4300					6260
7216AC/P5DB-C&U	170	39	2.1	1.1	95.1	110.4	6000	8000	92	163	2	1	1960	
7216B/P5DB-C&U					89.9	105	5300	7000					1988	
7316B/P5DB-C&U	130	22	1.1	0.6	143.7	156	5000	6600	95	144	2	1	2780	
7017AC/P5DB-C&U					130.4	138.4	3400	4600					2840	
7217AC/P5DB-C&U	85	150	28	2	218.4	218.4	3100	4100	92	125	1	0.6	7440	
7217B/P5DB-C&U					92.2	111	5000	6700					2080	
7018AC/P5DB-C&U	90	160	30	2	1	142.4	150.6	4700	6200	98.5	134.5	1.5	0.8	3560
7218AC/P5DB-C&U						129.1	140.4	3200	4200					3640
7218B/P5DB-C&U	140	24	1.5	1	102.1	124.8	4700	6300	100	154	2	1	2700	
7019AC/P5DB-C&U					189.4	199.8	4400	5800					4360	
7020AC/P5DB-C&U	95	145	24	1.5	172.7	187.4	3000	4000	108.5	144.5	1.5	0.8	4440	
7220AC/P5DB-C&U					112.6	138.6	4500	6000					2820	
7220B/P5DB-C&U	100	180	34	2.1	1.1	115.3	146.2	4300	5800	112	173	2	1	2940
7320B/P5DB-C&U						230.2	242.4	4000	5300					6520
7320B/P5DB-C&U	215	47	3	1	210.9	228.6	2700	3600	114	208	2.5	1	6800	
7320B/P5DB-C&U					308	354.8	2400	3200					14640	



型号
7320B/P5DB-C&U



● 优惠价
数量 1~9 10~
价格 100% 另行报价

交货期
10

