


O 型圈

特殊线径型

代码	类型	材质	硬度(邵氏)	颜色	使用温度范围	用途
XTM61	特殊线径型	丁腈橡胶	HS70 \pm 5	黑色	-20~100°C	耐矿物油用
XTM62		氟橡胶	HS75 \pm 5		-10~200°C	耐高温用

特点:

- 线径、内径可按照需要选择;
- 采用一体成型制造, 气密性高。

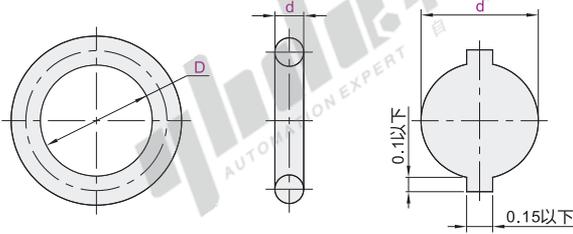

截面放大图



视角标准: 第一视角

型号					型号					型号				
代码	d	d公差	D内径	D公差	代码	d	d公差	D内径	D公差	代码	d	d公差	D内径	D公差
XTM61 XTM62	2.5	±0.08	3		XTM61 XTM62	3	±0.08	3		XTM61 XTM62	5	±0.12	5	
			4					4					6	
			5					5					7	
			6					6					8	
			7					7					9	
			8					8	±0.12				10	
			9					9	±0.12				11	
			10					10					12	
			11					11					13	
			12					12					14	
			13					13					15	
			14					14					16	
			15					15					17	
			16					16					18	
			17					17					19	
			18					18					20	±0.22
			19					19					21	
			20					20	±0.22				22	
			21					21					23	
			22					22					24	
			23					23					25	
			24					24					26	
			25					25					27	
			26					26					28	±0.25
			27					27					29	
			28					28	±0.25				30	
			29					29					31	
			30					30					32	
			31					31					33	
			32					32					34	±0.30
33		33		35										
34		34	±0.30	36										
35		35	±0.30	37										
36		36		38										
37		37		39										
38		38		40	0.33									
39		39		41										
40		40	±0.33	42										
41		41	±0.33	43										
42		42		44										
43		43		45	±0.38									
44		44		46										
45		45	±0.38	47										
46		46		48										
47		47		49										
48		48		50										
49		49		51										
50		50		52										
51		51		53	±0.43									
52		52		54										
53		53	±0.43	55										
54		54		56										
55		55		57										
56		56		58										
57		57		59	±0.45									
58		58		60										
59		59	±0.45											
60		60												



请按图示订货

型号		D
代码	d	3
XTM61	2.5	3
XTM62	2.5	4

XTM61—d2.5—D4



未税价(元)

● 优惠价

数量	1~50	51~
价格	100%	另行报价



交货期

9