


调整螺栓用固定块

侧开口型

代码	类型	材质		表面处理
		国标	相当	
PCB11	侧开口型	Q235	SS400	发黑
PCB12				无电解镀镍
PCB15		0Cr18Ni9	SUS304	—



❗ 如对防锈有要求，请优先选用不锈钢材质或无电解镀镍产品。

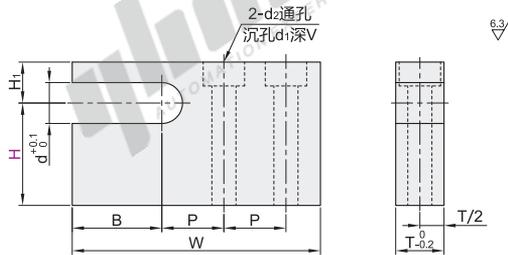

视角标准：第一视角

型号		H	d	T	(H ₁)	B	P	W	d ₁	d ₂	V
PCB11 PCB12 PCB15	4	10 15 20	3.5	7	6	13	9	36	6	3.5	3.5
	5	10 15 20 25	4.5	9	7	16	12	46	8	4.5	4.5
	6	10 15 20 25 30	5.5								
	8	10 15 20 25 30	7.5	12	12	19	15	55	9.5	5.5	5.5
	10	15 20 25 30	9.5	16	13	20	21	71	14	9	9



型号		H
代码	规格	
PCB11	4	10 15 20
PCB12	5	10 15 20 25
PCB15	6	10 15 20 25 30

PCB11—4—H20



优惠价	
数量	1~9 10~
价格	100% 另行报价



5

