


欧标40槽宽8.2系列型材(实用型)


◀ 边长40/80mm

代码	材质	表面处理
AOB05	A6063-T5	喷砂氧化


- ① 切断面未进行氧化处理。
- ② 最大使用长度：5880~6000mm。
- ③ 可定制表面处理。




◻ L长度公差

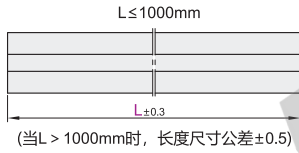


◻ 槽口详图

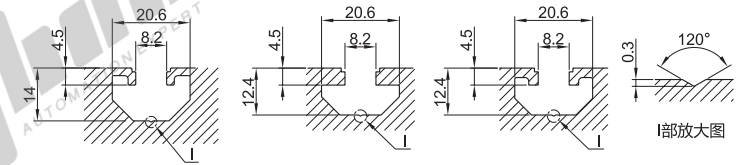


AOB05-J4040E 重量:1.5Kg/m




AOB05-J4040CE 重量:1.33Kg/m




AOB05-J4040C 重量:1.18Kg/m

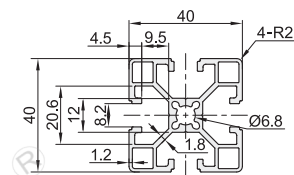


AOB05-J4040GE 重量:1.36Kg/m

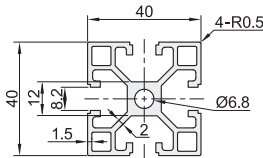


AOB05-J4040J 重量:1.94Kg/m




AOB05-J4040A 重量:1.44Kg/m




AOB05-J4040GA 重量:0.92Kg/m

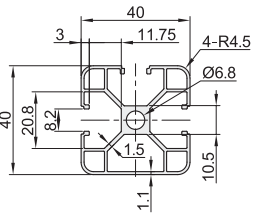


AOB05-J4040B 重量:1.42Kg/m




AOB05-J4040GB 重量:0.94Kg/m

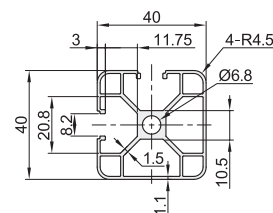


AOB05-J4040T 重量:1.42Kg/m




AOB05-J4040H 重量:1.39Kg/m




AOB05-J4040R 重量:1.25Kg/m




AOB05-J4080E 重量:2.7Kg/m

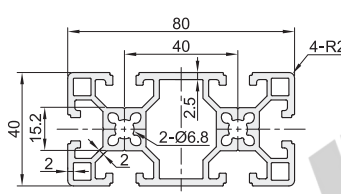

AOB05-J4080CE 重量:2.28Kg/m

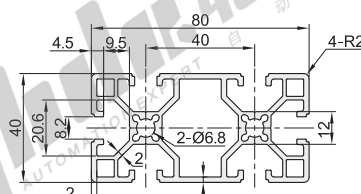


AOB05-J4080C 重量:2.04Kg/m

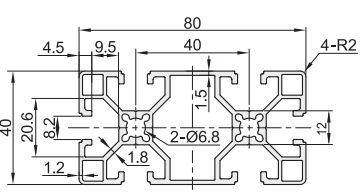


欧标40槽宽8.2系列型材(实用型)

◀ 边长40/80mm


AOB05-J4080GE 重量:2.3Kg/m

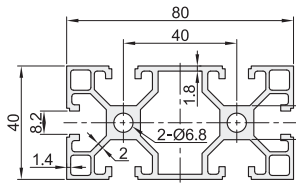


AOB05-J4080J 重量:3.67Kg/m

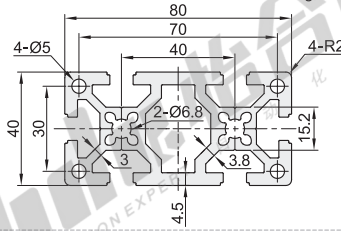


AOB05-J4080A 重量:2.03Kg/m

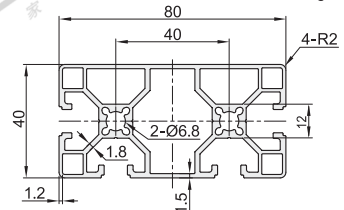


AOB05-J4080B 重量:2.03Kg/m




AOB05-J8840R 重量:3.23Kg/m

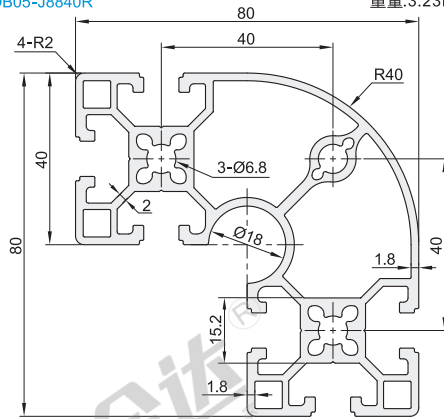


AOB05-J8840RA 重量:3.22Kg/m

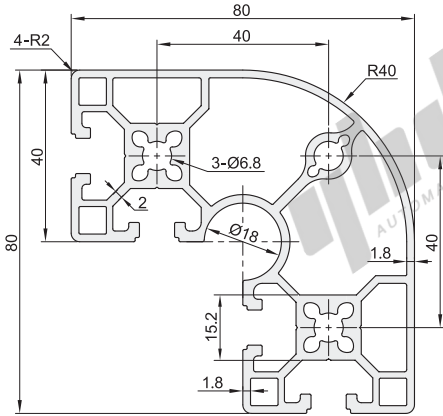


AOB05-J8080 重量:3.81Kg/m

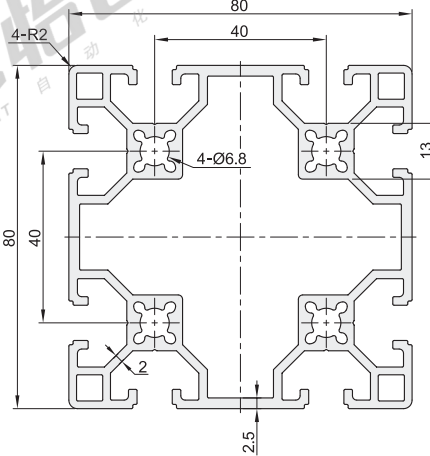

AOB05-J8080CE 重量:3.48Kg/m

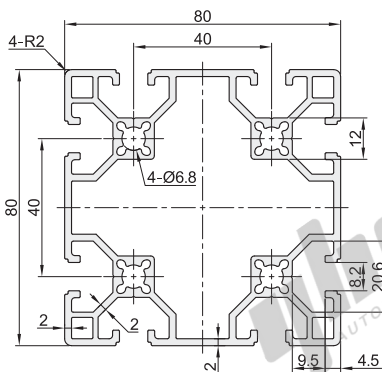

AOB05-J8080J 重量:5.53Kg/m

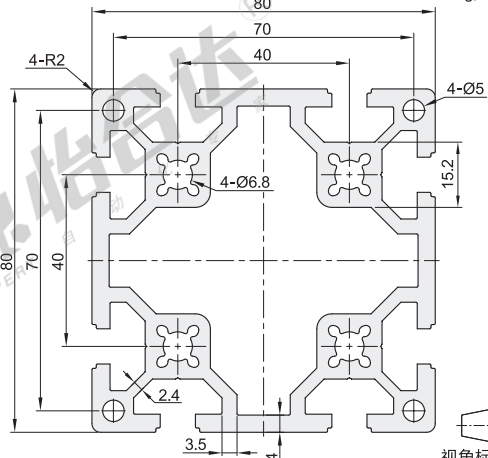

视角标准: 第一视角

欧标40槽宽8.2系列型材(实用型)

◀ 边长40/80mm

型号		L 最小单位0.5	截面尺寸	每米重量Kg/m (理论值)	截面积 (mm ²)	截面惯性矩		抗弯截面模数	
代码	规格					ix	iy	Wxmax (mm ³)	Wymax (mm ³)
A0B05	J4040R	50-6000	40×40	1.25	451.95	5.751×10 ⁴	5.751×10 ⁴	3301.38	3301.38
	J4040C			1.18	426.50	6.861×10 ⁴	6.861×10 ⁴	3430.50	3430.50
	J4040GE			1.36	493.92	7.82×10 ⁴	7.82×10 ⁴	3912.90	3912.90
	J4040E			1.50	544.45	8.534×10 ⁴	8.534×10 ⁴	4267.00	4267.00
	J4040CE			1.33	482.01	8.24×10 ⁴	8.24×10 ⁴	4118.27	4118.27
	J4040J			1.94	704.55	11.758×10 ⁴	11.758×10 ⁴	5879.00	5879.00
	J4040A			1.44	523.75	8.010×10 ⁴	8.284×10 ⁴	3890.26	4142.00
	J4040GA			0.92	334.9	5.33×10 ⁴	5.09×10 ⁴	2618.96	2544.72
	J4040B			1.42	515.74	8.021×10 ⁴	8.042×10 ⁴	3983.59	3961.23
	J4040GB			0.94	340.22	5.32×10 ⁴	5.32×10 ⁴	2616.49	2617.54
	J4040H	1.39	505.32	7.578×10 ⁴	8.126×10 ⁴	3789.00	4063.00		
	J4040T	1.42	513.91	7.891×10 ⁴	8.165×10 ⁴	3945.50	4082.50		
	J4080E	2.70	981.29	16.834×10 ⁴	63.014×10 ⁴	8416.84	15753.39		
	J4080CE	2.28	826.77	15.05×10 ⁴	55.03×10 ⁴	7524.48	13757.58		
	J4080C	2.04	742.91	12.973×10 ⁴	47.865×10 ⁴	6486.60	11966.32		
	J4080GE	2.30	837.11	14.05×10 ⁴	52.87×10 ⁴	7023.56	13217.70		
	J4080J	3.67	1333.57	23.165×10 ⁴	81.866×10 ⁴	11582.53	20466.62		
	J4080A	2.03	738.80	13.043×10 ⁴	47.60×10 ⁴	6513.04	11899.79		
	J4080B	2.03	736.74	12.992×10 ⁴	47.599×10 ⁴	6487.66	11857.84		
	J8840R	3.23	1174.21	68.46×10 ⁴	68.46×10 ⁴	16014.04	16014.04		
J8840RA	3.22	1169.74	68.254×10 ⁴	68.254×10 ⁴	15962.11	15962.11			
J8080	3.81	1383.29	102.196×10 ⁴	102.196×10 ⁴	25549.00	25549.00			
J8080CE	3.48	1265.09	96.29×10 ⁴	96.29×10 ⁴	24073.44	24073.44			
J8080J	5.53	2010.02	145.328×10 ⁴	145.328×10 ⁴	36332.00	36332.00			

① 实际重量与理论重量之间存在轻微差异，这主要源于生产工艺、包装材料等因素的影响。



请按图示订货

型号		L
代码	规格	最小单位0.5
A0B05	J4040R J4040C	50-6000

A0B05 — J4040R — L50

