

代码	类型	主体材质	表面处理	附件
DEC01	螺钉固定型	铝合金	阳极氧化	内六角紧定螺钉
DEC11	螺钉夹紧型			内六角圆柱头螺钉




特点


- 采用高强度铝合金一体加工成型,螺旋式切割,有良好的柔性。
- 顺时针和逆时针旋转时特性完全一样。
- 能补偿径向、角向、轴向偏差。
- 零回转间隙。

① 部分产品表面处理为镀珍珠镍,具体请咨询我司工作人员。

螺钉固定型
DEC01

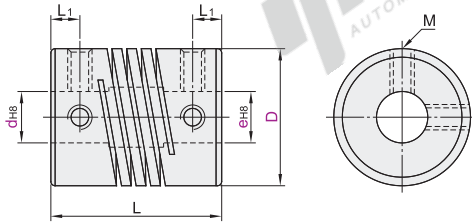

螺钉夹紧型
DEC11

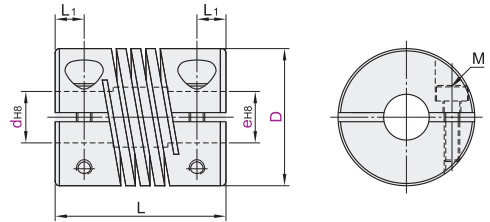

① 因偏心、偏角、轴向的位移如果同时出现多种偏差时,则容许值会降低。 ② 由于制作工艺原因,表面可能会有痕迹。

视角标准:第一视角

型号		d-e																																				
代码	D																																					
螺钉固定型 DEC01	15.5	d	3			4			5			6																										
		e	3 4 5 6			4 5 6			5 6			6																										
	15.5L	d	3			4			5			6																										
		e	3 4 5 6			4 5 6			5 6			6																										
	17.5	d	3			4			5			6			6.35																							
		e	3 4 5 6 6.35			4 5 6 6.35			5 6 6.35			6 6.35			6.35																							
	19.1	d	4			5			6			6.35			7			8																				
		e	4 5 6 6.35 7 8			5 6 6.35 7 8			6 6.35 7 8			6.35 7 8			7 8			8																				
	25.4	d	6			6.35			7			8			9			9.525			10			11			12											
		e	6 6.35 7 8 9 9.525 10 11 12			6.35 7 8 9 9.525 10 11 12			7 8 9 9.525 10 11 12			8 9 9.525 10 11 12			9 9.525 10 11 12			9.525 10 11 12			10 11 12			11 12			12											
28.6	d	6			6.35			7			8			9			9.525			10			11			12			12.7			13			14			
	e	6 6.35 7 8 9 9.525 10 11 12 12.7 13 14			6.35 7 8 9 9.525 10 11 12 12.7 13 14			7 8 9 9.525 10 11 12 12.7 13 14			8 9 9.525 10 11 12 12.7 13 14			9 9.525 10 11 12 12.7 13 14			9.525 10 11 12 12.7 13 14			10 11 12 12.7 13 14			11 12 12.7 13 14			12 12.7 13 14			12.7 13 14			13 14 14						
38.1	d	8			9			9.525			10			11			12			12.7			13			14			15			16						
	e	8 9 9.525 10 11 12 12.7 13 14 15 16			9 9.525 10 11 12 12.7 13 14 15 16			9.525 10 11 12 12.7 13 14 15 16			10 11 12 12.7 13 14 15 16			11 12 12.7 13 14 15 16			12 12.7 13 14 15 16			12.7 13 14 15 16			13 14 15 16			14 15 16			15 16 16									
50.8	d	10			11			12			12.7			13			14			15			16			17			18			19						
	e	10 11 12 12.7 13 14 15 16 17 18 19			11 12 12.7 13 14 15 16 17 18 19			12 12.7 13 14 15 16 17 18 19			12.7 13 14 15 16 17 18 19			13 14 15 16 17 18 19			14 15 16 17 18 19			15 16 17 18 19			16 17 18 19			17 18 19			18 19 19									
螺钉夹紧型 DEC11	19	d	3			4			5			6			6.35			7			8																	
		e	3 4 5 6 6.35 7 8			4 5 6 6.35 7 8			5 6 6.35 7 8			6 6.35 7 8			6.35 7 8			7 8			8																	
	25	d	5			6			6.35			7			8			9			9.525			10			11			12								
		e	5 6 6.35 7 8 9 9.525 10 11 12			6 6.35 7 8 9 9.525 10 11 12			6.35 7 8 9 9.525 10 11 12			7 8 9 9.525 10 11 12			8 9 9.525 10 11 12			9 9.525 10 11 12			9.525 10 11 12			10 11 12			11 12			12								
	28.5	d	6			6.35			7			8			9			9.525			10			11			12			12.7			13			14		
		e	6 6.35 7 8 9 9.525 10 11 12 12.7 13 14			6.35 7 8 9 9.525 10 11 12 12.7 13 14			7 8 9 9.525 10 11 12 12.7 13 14			8 9 9.525 10 11 12 12.7 13 14			9 9.525 10 11 12 12.7 13 14			9.525 10 11 12 12.7 13 14			10 11 12 12.7 13 14			11 12 12.7 13 14			12 12.7 13 14			12.7 13 14			13 14 14					
	38	d	8			9			9.525			10			11			12			12.7			13			14			15			16					
		e	8 9 9.525 10 11 12 12.7 13 14 15 16			9 9.525 10 11 12 12.7 13 14 15 16			9.525 10 11 12 12.7 13 14 15 16			10 11 12 12.7 13 14 15 16			11 12 12.7 13 14 15 16			12 12.7 13 14 15 16			12.7 13 14 15 16			13 14 15 16			14 15 16			15 16 16								
	42	d	10			11			12			12.7			13			14			15			16			17			18			19					
		e	10 11 12 12.7 13 14 15 16 17 18 19			11 12 12.7 13 14 15 16 17 18 19			12 12.7 13 14 15 16 17 18 19			12.7 13 14 15 16 17 18 19			13 14 15 16 17 18 19			14 15 16 17 18 19			15 16 17 18 19			16 17 18 19			17 18 19			18 19 19								
50	d	12			12.7			13			14			15			16			17			18			19												
	e	12 12.7 13 14 15 16 17 18 19			12.7 13 14 15 16 17 18 19			13 14 15 16 17 18 19			14 15 16 17 18 19			15 16 17 18 19			16 17 18 19			17 18 19			18 19 19															

经济型螺纹线式联轴器

螺钉固定型
螺钉夹紧型
铝合金

型号		L	L ₁	M	锁紧扭矩 (N·m)	额定扭矩 (N·m)	最大扭矩 (N·m)	最高转速 (r/min)	惯性力矩 (kg·m ²)	静态扭转刚性 (N·m/rad)	容许安装偏差			重量 (g)			
代码	D										径向(mm)	角向(°)	轴向(mm)				
DEC01	15.5	21	2.6	M3	0.7	0.3	0.6	15000	3.00×10 ⁻⁷	35	0.15	2	±0.15	9			
	15.5L	23	3.1												3.20×10 ⁻⁷	35	10
	17.5	19.1	2.55												6.10×10 ⁻⁷	65	12
	19.1	19.1	2.55	M4	1.7	1.8	3.6	12000	7.02×10 ⁻⁷	110	0.15	2	±0.15	13			
	25.4	25.4	3.55												2.87×10 ⁻⁶	170	30
	28.6	28.6	3.6												5.16×10 ⁻⁶	260	37
	38.1	38.1	4.15												2.20×10 ⁻⁵	330	82
50.8	50.8	5.25	M5	4.0	6.3	12.6	10000	9.38×10 ⁻⁵	560				180				
DEC11	19	23	3.1	M2.5	1.0	0.8	1.6	10000	8.39×10 ⁻⁷	110	0.15	2	±0.15	14			
	25	32	4.1	M3	1.5	1.8	3.6		3.60×10 ⁻⁶	170					36		
	28.5	38	5.0	M4	2.5	2.7	5.4	8000	6.87×10 ⁻⁶	260					50		
	38	41	5.9	M5	7.0	6.3	12.6		2.39×10 ⁻⁵	330					91		
	42			M5	7.0	10.5	21		4.67×10 ⁻⁵	420					140		
	50	50	6.7	M6	12.0	19.5	39	6000	9.38×10 ⁻⁵	560					180		

① 惯性力矩和重量按最大孔径计算。



请按图示订货

型号		d-e	
代码	D	d	e
DEC01	D25.4	6 6.35 7.8 9 9.525 10 11 12	6

DEC01—D25.4—d6—e7

② 可选加工

型号		d-e		可选加工代码
代码	D	d	e	
DEC01	D25.4	6 6.35 7.8 9 9.525 10 11 12	6	③ ④

DEC01—D25.4—dh6.1—eh8.2



可选加工

可选加工	变更d/e孔径																																								
代码	dh() eh()																																								
技术说明	<p>选型方法 dh3.1 eh4.5</p> <p>③ 最小单位0.1</p> <p>④ dh须≤eh</p> <p>⑤ 选型时须将d(e)变更为dh(eh)</p>																																								
	<table border="1"> <thead> <tr> <th colspan="2">DEC01</th> <th colspan="2">DEC11</th> </tr> <tr> <th>D</th> <th>dh·eh</th> <th>D</th> <th>dh·eh</th> </tr> </thead> <tbody> <tr> <td>15.5</td> <td>3~6</td> <td>19</td> <td>3~8</td> </tr> <tr> <td>15.5L</td> <td></td> <td>25</td> <td>5~12</td> </tr> <tr> <td>17.5</td> <td>3~6.35</td> <td>28.5</td> <td>6~14</td> </tr> <tr> <td>19.1</td> <td>4~8</td> <td>38</td> <td>8~17</td> </tr> <tr> <td>25.4</td> <td>6~12</td> <td>42</td> <td>10~19</td> </tr> <tr> <td>28.6</td> <td>6~14</td> <td>50</td> <td>12~19</td> </tr> <tr> <td>38.1</td> <td>8~16</td> <td></td> <td></td> </tr> <tr> <td>50.8</td> <td>10~19</td> <td></td> <td></td> </tr> </tbody> </table>	DEC01		DEC11		D	dh·eh	D	dh·eh	15.5	3~6	19	3~8	15.5L		25	5~12	17.5	3~6.35	28.5	6~14	19.1	4~8	38	8~17	25.4	6~12	42	10~19	28.6	6~14	50	12~19	38.1	8~16			50.8	10~19		
	DEC01		DEC11																																						
	D	dh·eh	D	dh·eh																																					
	15.5	3~6	19	3~8																																					
	15.5L		25	5~12																																					
	17.5	3~6.35	28.5	6~14																																					
	19.1	4~8	38	8~17																																					
	25.4	6~12	42	10~19																																					
	28.6	6~14	50	12~19																																					
38.1	8~16																																								
50.8	10~19																																								



未税价(元)

● 优惠价

数量	1~9	10~
价格	100%	另行报价



交货期
3