


标准型·安装孔通孔
加长型·安装孔通孔


厚壁法兰型导向轴支座

标准型·安装孔通孔

代码			材质		表面处理
圆法兰型	方法兰型	对边法兰型	国标	相当	
GBC01	GBC11	GBC21	45	S45C	发黑
GBC02	GBC12	GBC22			喷细砂无电解镍
GBC06	GBC16	GBC26	0Cr18Ni9	SUS304	—
GBC08	GBC18	GBC28	LF5-1	A5056	喷细砂本色阳极氧化
GBC09	GBC19	GBC29			黑色阳极氧化

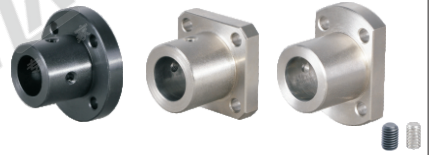

① 如对防锈有要求, 请优先选用不锈钢材质、铝合金材质或喷细砂无电解镍产品。

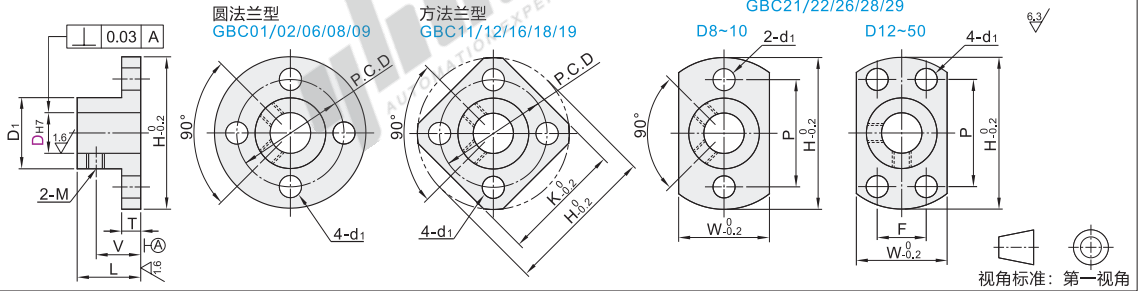

型号			代码													D _{H7}		L	D ₁	H	T	V	M	P.C.D	K	W	P	F	d ₁
圆法兰型	方法兰型	对边法兰型	8	+0,015 0	16	14.8	32	5	11	M3	25	25	15	25	—	3.5													
			8M							M4																			
			10							M3							30	30	20	30									
			12	+0,018 0	24	21.8	40	16	18	34	34	27	28	16	4.5														
			13													M4	38	38	29	32	18								
			15													30	25.8	48	19	38	38	29	32	18					
			16	+0,021 0	32	27.8	50	6	20	40	39	32	33	22	5.5														
			20													M5	50	48	40	42	25								
			25													38	34.8	63	22	55	53	45	45	30	6.6				
			30	+0,025 0	44.8	73	10	25	M6	60	58	50	48	35	9														
35	54.8	89	10													72	70	61	58	42									
40	50	69.8	104													12	32	M8	87	80	76	68	54						
50	79.8	114	12	32	M8	97	90	86	73	64																			




数量	1~9	10~
价格	100%	另行报价



加长型·安装孔通孔

代码			材质		表面处理
圆法兰型	方法兰型	对边法兰型	国标	相当	
GBF01	GBF11	GBF21	45	S45C	发黑
GBF02	GBF12	GBF22			喷细砂无电解镍
GBF06	GBF16	GBF26	0Cr18Ni9	SUS304	—

① 如对防锈有要求, 请优先选用不锈钢材质或喷细砂无电解镍产品。

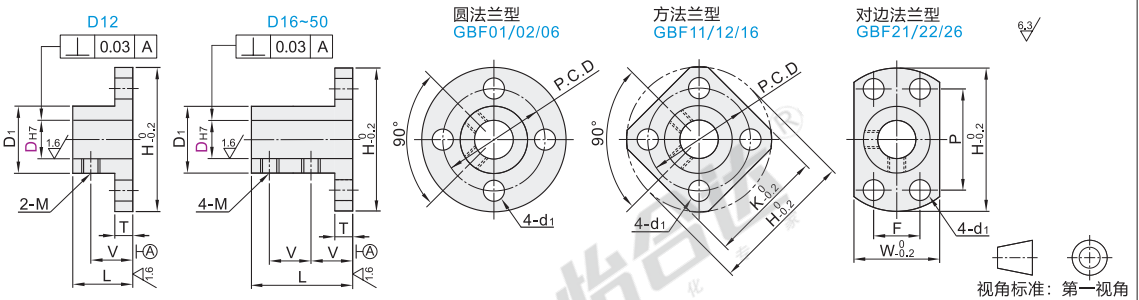

型号			代码													D _{H7}		L	D ₁	H	T	V	M	P.C.D	K	W	P	F	d ₁
圆法兰型	方法兰型	对边法兰型	12	+0.018 0	30	21.8	40	6	16	M4	32	32	25	28	16	4.5													
			16		48	27.8	50	18	40		39	32	33	22	5.5														
			20			34.8	63	8	20	M5	50	48	40	42	25														
			25	+0.021 0	57	39.8	68	10		55	53	45	45	30	6.6														
			30			44.8	73	12	M6	60	58	50	48	35															
			35			54.8	89	14		72	70	61	58	42															
40	+0.025 0	75	69.8	104	12	26	M8	87	80	76	68	54	9																
50			79.8	114	16	97		90	86	73	64																		



数量	1~9	10~
价格	100%	另行报价

