


弯接头 >  
T型接头 >  
外螺纹

# 精密型 全不锈钢快插接头

## 弯接头

| 代码      | 类型      | 材质     |      |
|---------|---------|--------|------|
|         |         | 主体     | 密封   |
| Y-UDA03 | 外螺纹 弯接头 | SUS316 | 氟化橡胶 |



视角标准：第一视角

| 型号      |    | 公称型号 | R    | A   | B    | F    | C    | E    | S  |
|---------|----|------|------|-----|------|------|------|------|----|
| 代码      | D  |      |      |     |      |      |      |      |    |
| Y-UDA03 | 4  | M5   | M5   | 3.5 | 18.5 | 23.5 | 18.6 | 22.3 | 12 |
|         |    | M6   | M6   | 4.5 | 19.5 | 24.5 |      |      | 12 |
|         |    | 1    | R1/8 | 8   | 20   | 25   |      |      | 14 |
|         |    | 2    | R1/4 | 11  | 22.5 | 27.5 |      |      | 14 |
|         | 6  | M5   | M5   | 3.5 | 19.5 | 25.5 | 18.7 | 23.4 | 12 |
|         |    | M6   | M6   | 4.5 | 20.5 | 26.5 |      |      | 12 |
|         |    | 1    | R1/8 | 8   | 21   | 27   |      |      | 14 |
|         |    | 2    | R1/4 | 11  | 23.5 | 29.5 |      |      | 14 |
|         | 8  | 3    | R3/8 | 12  | 26.5 | 32.5 | 20   | 25.2 | 19 |
|         |    | 4    | R1/2 | 15  | 30.5 | 36.5 |      |      | 22 |
|         |    | 1    | R1/8 | 8   | 22   | 29   |      |      | 12 |
|         |    | 2    | R1/4 | 11  | 24.5 | 31.5 |      |      | 14 |
|         | 10 | 3    | R3/8 | 12  | 27.5 | 34.5 | 25.2 | 31.7 | 19 |
|         |    | 4    | R1/2 | 15  | 31.5 | 38.5 |      |      | 22 |
|         |    | 1    | R1/8 | 8   | 28   | 36.5 |      |      | 17 |
|         |    | 2    | R1/4 | 11  | 31   | 39.5 |      |      | 19 |
|         | 12 | 4    | R1/2 | 15  | 34   | 42.5 | 27.2 | 34.9 | 22 |
|         |    | 2    | R1/4 | 11  | 32.3 | 42   |      |      | 17 |
|         |    | 3    | R3/8 | 12  | 32.3 | 42   |      |      | 19 |
|         |    | 4    | R1/2 | 15  | 35.3 | 45   |      |      | 22 |


请按图示订货

| 型号      |   | 公称型号 | R    |
|---------|---|------|------|
| 代码      | D |      |      |
| Y-UDA03 | 6 | 2    | R1/4 |
|         | 8 | 1    | R1/8 |

Y-UDA03 - D6 - 2

## T型接头

| 代码      | 类型       | 材质     |      |
|---------|----------|--------|------|
|         |          | 主体     | 密封   |
| Y-UDA04 | 外螺纹 T型接头 | SUS316 | 氟化橡胶 |

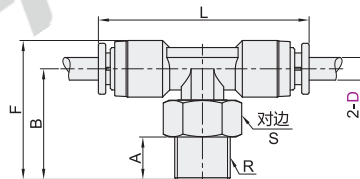

视角标准：第一视角

| 型号      |    | 公称型号 | R    | A   | B    | F    | L    | S  |
|---------|----|------|------|-----|------|------|------|----|
| 代码      | D  |      |      |     |      |      |      |    |
| Y-UDA04 | 4  | M5   | M5   | 3.5 | 18.5 | 23.5 | 37.2 | 12 |
|         |    | M6   | M6   | 4.5 | 19.5 | 24.5 |      | 12 |
|         |    | 1    | R1/8 | 8   | 20   | 25   |      | 14 |
|         |    | 2    | R1/4 | 11  | 22.5 | 27.5 |      | 14 |
|         | 6  | M5   | M5   | 3.5 | 19.5 | 25.5 | 37.4 | 12 |
|         |    | M6   | M6   | 4.5 | 20.5 | 26.5 |      | 12 |
|         |    | 1    | R1/8 | 8   | 21   | 27   |      | 14 |
|         |    | 2    | R1/4 | 11  | 23.5 | 29.5 |      | 14 |
|         | 8  | 3    | R3/8 | 12  | 26.5 | 32.5 | 40   | 19 |
|         |    | 4    | R1/2 | 15  | 30.5 | 36.5 |      | 22 |
|         |    | 1    | R1/8 | 8   | 22   | 29   |      | 12 |
|         |    | 2    | R1/4 | 11  | 24.5 | 31.5 |      | 14 |
|         | 10 | 3    | R3/8 | 12  | 27.5 | 34.5 | 50.4 | 19 |
|         |    | 4    | R1/2 | 15  | 31.5 | 38.5 |      | 22 |
|         |    | 1    | R1/8 | 8   | 28   | 36.5 |      | 17 |
|         |    | 2    | R1/4 | 11  | 31   | 39.5 |      | 19 |
|         | 12 | 4    | R1/2 | 15  | 34   | 42.5 | 54.4 | 22 |
|         |    | 2    | R1/4 | 11  | 32.3 | 42   |      | 17 |
|         |    | 3    | R3/8 | 12  | 32.3 | 42   |      | 19 |
|         |    | 4    | R1/2 | 15  | 35.3 | 45   |      | 22 |

请按图示订货

| 型号      |   | 公称型号 | R    |
|---------|---|------|------|
| 代码      | D |      |      |
| Y-UDA04 | 6 | 2    | R1/4 |
|         | 8 | 1    | R1/8 |

Y-UDA04 - D6 - 2