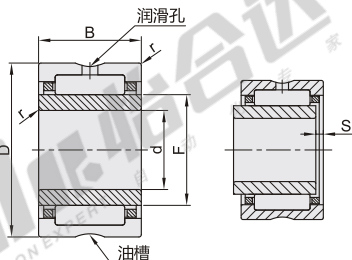


带挡边滚针轴承

开式·无密封带内圈
标准型

代码	类型			轴承材质	
				国标	相当
BAQ	标准型	开式	无密封带内圈	GCr15	SUJ2

① 对于 $d \leq 7\text{mm}$ 的NKI系列, 没有润滑孔和油槽。

② S是内圈相对于外圈的容许轴向移动量。

③ 不承诺品牌。

型号			d	F	D	B	r (min)	S	基本额定负载		极限转速 rpm	重量 (g) (参考)	
代码	轴承型号								Cr(动) N	Cor(静) N			
BAQ	NKI5/12		5	8	15	12		1.5	3560	3280	26000	11.5	
	NKI5/16					16		2	4640	4640		15.3	
	NKI6/12		6	9	16	12		1.5	4080	4000	24800	13.5	
	NKI6/16					16		2	5280	5680		17.4	
	NKI7/12	—	7	10	17	12		1.5	4240	4400	23600	13.7	
	NKI7/16					16		2	5600	6240		18.2	
	NKI9/12		9	12	19	12		1.5	5760	5680	21200	16.6	
	NKI9/16					16		2	8080	8800		21.9	
	NKI10/16					16			9120	9200		29.4	
	NKI10/20	—	10	14	22	20	0.3		11600	12480	19680	37.1	
	—	NA4900					13		7680	7360	20000	23	
	NKI12/16	—					16		10240	11120		33.3	
	NKI12/20						20		13040	15040	18560	41.9	
	—	NA4901		12	16	24	13		8480	8720		26	
	—	NA6901					22		14480	17280	18880	46	
	NKI15/16	—			19	27	16		11760	13920		38.8	
	NKI15/20						20		14960	18880		48.7	
	—	NA4902		15	20	28	13		9600	10880		34	
	—	NA6902					23		15600	20400		63.6	
	NKI17/16	—	NKIS15		22	35	20	0.6	22000	22400	15680	92	
	NKI17/20				21	29	16		12160	14960		42.4	
	—	NA4903	—	17	22	30	13	0.3	15440	20400	16480	53.4	
	—	NA6903					23		9920	11680		37	
	NKI20/16	—	NKIS17			37	20	0.6	16880	23200		72	
	NKI20/20				24	32	16		23600	24800	14480	98	
	—	NA4904	—	20			20	0.3	13520	17840		49	
	—	NA6904			25	37	30		17120	24400	14800	61	
	NKI22/16	—	NKIS20			28	42	0.6	18960	20400		75.2	
	NKI22/20						30		1	32400	40800	13760	141
	—	NA49/22		22	26	34	16		26000	29200	12640	129	
	—	NA69/22					20		0.5	13840	18880		52
	NKI25/20	—	—		28	39	17		17600	25600	13760	65.4	
	NKI25/30					30		0.3	0.8	20800	23600		80
	—	NA4905		25			30		0.5	33600	44000	12880	150
	—	NA6905			29	38	30		1	22000	31200		75.8
	NKI28/20	—	NKIS25				17		1.5	29600	45600	12240	124
	NKI28/30				30	42	30		0.8	21200	25200	11680	88
	—	NA49/28					47	0.6	1	35200	47200		161
	—	NA69/28					20		1	30400	34800	10880	162
	NKI30/20	—		28	32	42	30		1.5	23600	35600		92.4
	NKI30/30						17		0.8	31200	50400	11200	146
	—	NA4906	—			45	30	0.3	1	22000	26800		97.7
	—	NA6906					30		0.5	36400	50400	10720	182
	NKI32/20	—	NKIS30				17		1	24800	38800		108
	NKI32/30			30	35		30		0.8	26800	44800	9120	122
	—	NA4907				47	30		1	28400	40000	8720	170
	NKI35/20	—	NKIS35				22	0.6	0.8	22800	28400		101
	NKI35/30						20		1	39200	56800	10160	192
	—	NA4908	—				52	0.6	1	33200	40000	9600	184
	NKI38/20	—			37	47	20	0.3	0.5	32000	40000		118
	NKI38/30			32			30		1	22400	34800		118
	NKI40/20	—	NA49/32		40	52	20	0.6	0.8	33600	58400	9840	180
	NKI40/30						30		0.5	27600	38000	9360	158
	—	NA4909	—	35	40	50	20	0.3	1	26800	44800		122
	NKI42/20	—					30		0.8	35200	63200	9120	193
	NKI42/30				42	55	20	0.6	0.5	32000	40000	8720	170
	NKI45/25	—	NKIS40				22		1	28400	40000	8720	170
	NKI45/35						20		0.5	35200	45600	8400	220
	—	NA4909		38	43	53	30	0.3	1	24400	40800	8560	136
	NKI48/20	—					30		0.5	36400	68000		207
NKI48/30						20		1	28000	49600	8160	136	
—	NA4908		40	48	62	22	0.6	1	41600	82400		216	
NKI50/25	—	NKIS45				22	1	0.5	38800	53600	7680	230	
NKI50/35				50	65	22		1	38400	53600	7440	281	
—	NA4910	—	42	47	57	30	0.3	0.5	26000	44800		148	
NKI55/25	—					25		1	38800	75200	7840	222	
NKI55/35						35	0.6	1.5	38800	69600		217	
—	NA4909		45	50	62	35		2	53600	105600	7360	308	
NKI60/25	—	NKIS45				22	1	1	40800	58400	6960	271	
NKI60/35				55	68	25		0.5	40800	59200		336	
—	NA4910	—	50			35	0.6	1.5	36400	65600	6720	270	
NKI70/25	—	NKIS50				22		2	48000	94400		379	
NKI70/35				58	72	22		1	42400	64000	6400	274	
—	NA4910			60	80	28	1.1	2	56800	78400	6000	518	