

圆螺母

代码	类型	螺纹	材质		表面处理	适用标准	强度等级
			国标	相当			
TBK71	小圆螺母	细牙	45	S45C	发黑	GB/T 810	8
TBK74	圆螺母		0Cr18Ni9	SUS304	—	GB/T 812	—
TBK75							

TBK71




TBK74




TBK75



小圆螺母
TBK71

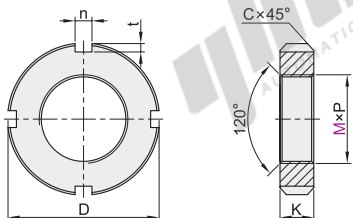

圆螺母
TBK74
TBK75

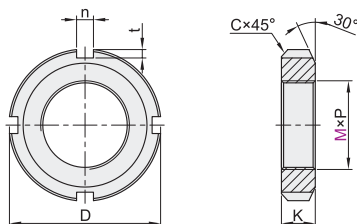

① M≤100, N(槽数)=4
M≥105, N(槽数)=6

视角标准：第一视角

小圆螺母

型号		螺距P	D	C	K	n		t	
代码	M					max	min	max	min
(S45C) TBK71	10	1.0	20	0.5	6	4.3	4	2.6	2
	12	1.25	22						
	14		25						
	16		28						
	18		30						
	20		32		5.3	5	3.1	2.5	
	22		35						
	24	1.5	38						
	27		42						
	30		45						8
	33		48						
	36		52						
	39		55						
	42		58	10	8.36	8	4.25	3.5	
	48		68						
	52		72						
	56		78						
	60	80	1						12
	64	85							
	68	90							
	72	95							
	76	100		15	12.43	12	5.75	5	
	80	105							
	85	110							
	90	115							
	95	120							18
	100	125							
	105	130							
	110	135							
	115	140	3.0	16.43	16	7.9	7		
120	145								
125	150								
130	160								
140	170								
150	180								
160	195								
170	205								
180	220								
190	230								
200	240								


圆螺母

型号		螺距P	D	C	K	n		t	
代码	M					max	min	max	min
(S45C) TBK74	10	1.0	22	0.5	8	4.3	4	2.6	2
	12	1.25	25						
	14		28						
	16		30						
	18		32						
	20		35	5.3	5	3.1	2.5		
	22		38						
	24		42						
	25	1.5	45					1	10
	27		48						
30	52								
33	55								
35	58								
(SUS304) TBK75	36		62	1.5	12	8.36	8	4.25	3.5
	39		68						
	40		72						
	42								
	45			15					
	48								
	50								
	72*	2	105						

① 带*的规格不适用TBK75。

EX Example
使用示例

圆螺母止动垫圈



① 使用时圆螺母止动垫圈装在螺母开槽的那一侧，紧固后将内外止动耳折弯放到槽内。圆螺母紧固后，将内外耳扳成轴向，分别卡在轴上的键槽和圆螺母的开口处，这样，圆螺母就不会由于轴的转动而松脱。



请按图示订货

小圆螺母

型号	螺距P
代码 M	
(TBK71)	1.0
	1.25

TBK71—M10



未税价(元)

优惠价

数量	1~45	46~
价格	100%	另行报价



交货期

7