

高负载型氮气弹簧


◀ 微型

代码	类型	材质		表面处理		使用气体
		气缸筒	活塞杆	气缸筒	活塞杆	
J-FHK11	微型	钢		发黑	渗氮	N ₂


- 特点
- 此系列产品缸筒为滚压成型，永久性封闭，不可维修。
 - 以颜色做标识区分不同力值。



规格: 12/15

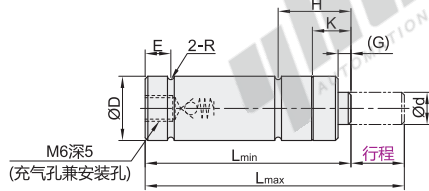

规格: 19

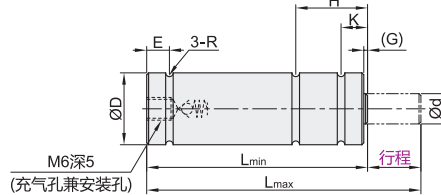

视角标准: 第一视角

型号	代码	规格	行程	颜色标识	在+20°C时的弹簧力(N)				L _{max}	压缩后长度		D	d	E	R	H	(G)	K	适用 安装法兰		
					初始力	终端力				L _{min}	D									d	
						GR	B	RE													Y
J-FHK11			7			149	299	448	597	56	49										
			10			158	317	475	634	62	52										
			12.7			164	329	493	657	67.4	54.7										
			15			168	335	503	670	72	57										
			19	GR(绿色)	GR:130N	172	344	517	689	80	61										
			25	B(蓝色)	B:250N	177	354	530	707	92	67										
			38.1	RE(红色)	RE:380N	183	365	548	730	118.1	80	12	6						FHK50-12		
			50	Y(黄色)	Y:500N	185	371	556	742	142	92										
			63.5	BK(黑色)	BK:60~500N*	197	395	592	789	172	108.5										
			75			197	394	591	788	195	120										
			80			207	414	620	827	205	125										
			100			204	409	613	817	245	145										
			125			202	405	607	810	295	170				0.8		3				
			7			216	432	648	865	56	49										
			10			224	447	671	895	62	52										
			12.7			228	457	685	914	67.4	54.7										
			15			232	463	695	927	72	57										
			19	GR(绿色)	GR:180N	236	471	707	943	80	61										
			25	B(蓝色)	B:350N	240	480	720	961	92	67			6		17		6			
			38.1	RE(红色)	RE:500N	258	516	774	1032	118.2	80.1	15	7						FHK50-15		
			50	Y(黄色)	Y:700N	270	541	811	1082	195	120										
			63.5	BK(黑色)	BK:80~700N*	273	546	819	1092	172	108.5										
			75			270	541	811	1082	195	120										
			80			270	539	809	1079	205	125										
		100			267	534	802	1069	245	145											
		125			265	531	796	1062	295	170											
		7			444	740	1040	1330	66	54											
		10			470	780	1100	1400	62	52											
		12			444	740	1040	1330	66	54											
		15	GR(绿色)	GR:300N	440	730	1000	1300	72	57											
		25	B(蓝色)	B:500N	420	700	980	1300	92	67											
		38.1	RE(红色)	RE:700N		690	970		118.2	80.1	19	8			1		1	FHK50-19 FHK50-19A			
		50	Y(黄色)	Y:900N		960			142	92											
		63.5	BK(黑色)	BK:125~900N*	410	680	950	1200	172	108.5											
		80							205	125											
		100							245	145											
		125				670	940		295	170											

① *BK(黑色)此弹簧力初始力值由客户指定，交货时带5~10bar的预充气压力。

② 初始力公差: ±7%



型号		行程	颜色标识
代码	规格		
J-FHK11	12	10	GR B RE Y BK

J-FHK11 - 12 - 7 - GR



优惠价		
数量	1~19	20~
价格	100%	另行报价



氮气弹簧