


耐热型矩形弹簧

| 代码 | 类型 | 材质 | | 表面处理 | |
|------|---------|---------|------|------|----|
| | | 弹簧 | 底座 | 弹簧 | 底座 |
| YWSW | 耐热120°C | SWOSC-V | S45C | — | 发黑 |
| YWSV | 耐热200°C | — | — | — | — |

- ① 载荷(±10%)
- ② 直角度(2°以下)
- ③ 1kgf=9.81N
- ④ 压紧长度为参考值, 制作时会有少许差异。

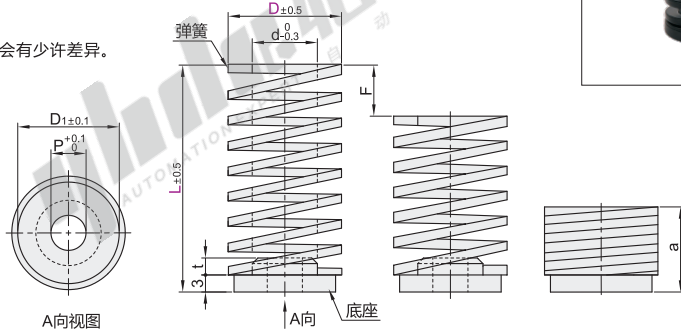

视角标准: 第一视角

耐热120°C

| 代码 | 型号 | | d | D ₁ | P | t | 弹簧常数 N/mm | a 压紧长度 | 使用方法 | | | | 适用螺栓 |
|------|----|----|------|----------------|-----|------|--------------|-----------|-------------|-------|--------------|-------|------|
| | D | L | | | | | | | 30万次F=L×40% | | 100万次F=L×25% | | |
| | | | | | | | | Fmm | 负载N | Fmm | 负载N | | |
| YWSW | 16 | 20 | 9 | 15.9 | 5.2 | | 36.8 | 12 | 7* | 279.5 | 5 | 183.8 | M5 |
| | | 25 | | | | | 29.4 | 14 | 10 | 294.2 | 6.25 | | |
| | | 30 | | | | | 24.5 | 16 | 12 | | 7.5 | | |
| | 18 | 20 | 11 | 17.9 | | 3 | 42.9 | 12 | 7* | 326.1 | 5 | 214.5 | |
| | | 25 | | | | | 34.3 | 14 | 10 | 343.2 | 6.25 | | |
| | | 30 | | | | | 28.6 | 17 | 12 | | 7.5 | | |
| | 20 | 25 | 11.5 | 19.9 | | | 44.1 | 13 | 10 | 441.3 | 6.25 | 275.6 | |
| | | 30 | | | | | 36.8 | 17 | 12 | | 7.5 | | |
| | | 35 | | | | | 31.5 | 19 | 14 | | 8.75 | | |
| | 22 | 25 | 12.7 | 21.9 | 6.2 | 3.5 | 27.6 | 21 | 16 | 539.4 | 10 | 337.5 | M6 |
| | | 30 | | | | | 53.9 | 14 | 10 | | 6.25 | | |
| | | 40 | | | | | 45.0 | 16 | 12 | | 7.5 | | |
| 25 | 35 | 15 | 24.9 | | 4 | 38.5 | 17 | 14 | 686.5 | 8.75 | 428.6 | | |
| | 40 | | | | | 33.7 | 23 | 16 | | 10 | | | |
| | 45 | | | | | 30.0 | 25 | 18 | | 11.25 | | | |
| 30 | 30 | 17 | 29.9 | | 4.5 | 61.3 | 18 | 12 | 784.5 | 7.5 | 490.3 | | |
| | 35 | | | | | 49.0 | 21 | 14 | | 8.75 | | | |
| | 45 | | | | | 42.9 | 22 | 16 | | 10 | | | |
| 30 | 45 | | | | | 38.1 | 25 | 18 | 878.5 | 11.25 | | | |
| | 50 | | | | | 34.3 | 27 | 20 | | 12.5 | | | |
| | 55 | | | | | 43.6 | 25 | 18 | | 11.25 | | | |
| 30 | 50 | | | | | 39.2 | 27 | 20 | 784.5 | 12.5 | 490.3 | | |
| | 55 | | | | | 35.7 | 30 | 22 | | 13.75 | | | |

① Fmm*请在F=L×35%以内使用。

耐热200°C

| 代码 | 型号 | | d | D ₁ | P | t | 弹簧常数 N/mm | a 压紧长度 | 使用方法 | | | | 适用螺栓 |
|------|----|----|------|----------------|-----|------|--------------|-----------|-------------|-------|--------------|-------|------|
| | D | L | | | | | | | 30万次F=L×30% | | 100万次F=L×25% | | |
| | | | | | | | | Fmm | 负载N | Fmm | 负载N | | |
| YWSV | 16 | 20 | 9 | 15.9 | 5.2 | | 32.7 | 14 | 容许范围以外 | | 5 | 163.4 | M5 |
| | | 25 | | | | | 26.2 | 16 | 7.5 | 196.1 | 6.25 | | |
| | | 30 | | | | | 21.8 | 19 | 9 | | 7.5 | | |
| | 18 | 20 | 11 | 17.9 | | 3 | 39.2 | 14 | 容许范围以外 | | 5 | 196.1 | |
| | | 25 | | | | | 31.4 | 16 | 7.5 | 235.4 | 6.25 | | |
| | | 30 | | | | | 26.2 | 19 | 9 | | 7.5 | | |
| | 20 | 25 | 11.5 | 19.9 | | | 39.2 | 16 | 7.5 | 294.2 | 6.25 | 245.2 | |
| | | 30 | | | | | 32.7 | 19 | 9 | | 7.5 | | |
| | | 35 | | | | | 28.0 | 21 | 10.5 | | 8.75 | | |
| | 22 | 40 | 12.7 | 21.9 | 6.2 | 3.5 | 24.5 | 24 | 12 | 367.7 | 10 | 306.5 | M6 |
| | | 25 | | | | | 49.0 | 16 | 7.5 | | 6.25 | | |
| | | 30 | | | | | 40.9 | 19 | 9 | | 7.5 | | |
| 25 | 35 | 15 | 24.9 | | 4 | 35.0 | 21 | 10.5 | 490.3 | 8.75 | 408.6 | | |
| | 40 | | | | | 30.6 | 24 | 12 | | 10 | | | |
| | 45 | | | | | 27.2 | 27 | 13.5 | | 11.25 | | | |
| 30 | 30 | 17 | 29.9 | | 4.5 | 54.5 | 19 | 9 | 559.0 | 7.5 | 465.8 | | |
| | 35 | | | | | 46.7 | 21 | 10.5 | | 8.75 | | | |
| | 40 | | | | | 40.9 | 24 | 12 | | 10 | | | |
| 30 | 45 | | | | | 36.3 | 27 | 13.5 | 784.5 | 11.25 | | | |
| | 50 | | | | | 32.7 | 31 | 15 | | 12.5 | | | |
| | 55 | | | | | 41.4 | 27 | 13.5 | | 11.25 | | | |
| 30 | 50 | | | | | 37.3 | 31 | 15 | 559.0 | 12.5 | 465.8 | | |
| | 55 | | | | | 33.9 | 34 | 16.5 | | 13.75 | | | |

耐热200°C

| 型号 | |
|------|----------|
| 代码 | D L |
| YWSV | 16 20 25 |

YWSV-D16-L20



● 优惠价
数量 1~9 10~
价格 100% 另行报价



交货期
3

请按图示订货

未标价(元)