


### 迷你型·直联型/带排气节流阀 ▶

调速阀类  
气动接头


| 代码      | 类型  |        | 材质  |
|---------|-----|--------|-----|
| J-XZN01 | 标准型 | 带排气节流阀 | 铝合金 |

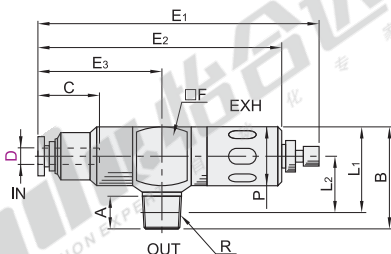

视角标准：第一视角

| 型号      |    | 公称<br>型号 | R    | A  | B    | L <sub>1</sub> | L <sub>2</sub> | P    | C     | E <sub>1</sub> |      | E <sub>2</sub> | E <sub>3</sub> | F  | 有效断面积 (mm <sup>2</sup> ) |        | 重量<br>(g) |
|---------|----|----------|------|----|------|----------------|----------------|------|-------|----------------|------|----------------|----------------|----|--------------------------|--------|-----------|
| 代码      | D  |          |      |    |      |                |                |      |       | max            | min  |                |                |    | IN→OUT                   | OUT→EX |           |
| J-XZN01 | 4  | 1        | R1/8 | 8  | 25.5 | 21.5           | 14             | 15   | 10.9  | 66.7           | 61.8 | 54.3           | 23.8           | 15 | 4                        | 8      | 23        |
|         | 6  | 1        | R1/8 | 8  | 29   | 25             | 16             | 18   | 11.7  | 77.4           | 71.6 | 63.1           | 28.1           | 18 | 9                        | 15     | 35        |
|         |    | 2        | R1/4 | 11 | 31   |                |                |      |       |                |      |                |                |    | 37                       |        |           |
|         | 8  | 1        | R1/8 | 8  | 29   | 34.5           | 22             | 25   | 20.7  | 82.7           | 76.9 | 68.4           | 33.4           |    | 12                       | 31     | 39        |
|         |    | 2        | R1/4 | 11 | 31   |                |                |      |       |                |      |                |                |    | 41                       |        |           |
|         | 10 | 2        | R1/4 | 11 |      | 42.5           | 21.7           | 21.8 | 105.3 | 105.3          | 95.8 | 42.8           | 25             | 24 | 27                       | 34     | 97        |
|         |    | 3        | R3/8 | 12 |      |                |                |      |       |                |      |                |                | 25 |                          |        | 98        |
|         |    | 4        | R1/2 | 15 |      |                |                |      |       |                |      |                |                |    |                          |        | 102       |


| 代码      | 类型  |        | 材质  |
|---------|-----|--------|-----|
| J-XZN11 | 标准型 | 带快装配接头 | 铝合金 |

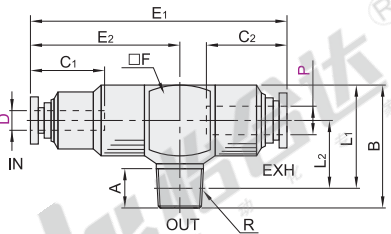

视角标准：第一视角



| 型号      |    | P  | 公称<br>型号 | R    | A  | B    | L <sub>1</sub> | L <sub>2</sub> | C <sub>1</sub> | C <sub>2</sub> | E <sub>1</sub> | E <sub>2</sub> | F  | 有效断面积 (mm <sup>2</sup> ) |          | 重量<br>(g) |
|---------|----|----|----------|------|----|------|----------------|----------------|----------------|----------------|----------------|----------------|----|--------------------------|----------|-----------|
| 代码      | D  |    |          |      |    |      |                |                |                |                |                |                |    | IN → OUT                 | OUT → EX |           |
| J-XZN11 | 4  | 8  | 1        | R1/8 | 8  | 25.5 | 21.5           | 14             | 10.9           | 18.2           | 46.5           | 23.8           | 15 | 4                        | 9        | 19        |
|         | 6  |    | 2        | R1/4 | 11 | 29   | 25             | 16             | 11.7           | 20.7           | 54.4           | 28.1           | 18 | 9                        | 16       | 27        |
|         | 8  |    | 1        | R1/8 | 8  | 31   |                |                |                |                |                |                |    | 18.2                     | 59.7     | 33.4      |
|         |    |    | 2        | R1/4 | 11 | 29   | 34.5           | 22             |                | 24             | 34             | 69             |    |                          |          |           |
|         | 10 | 12 | 3        | R3/8 | 12 | 20.7 | 22.3           | 74.6           | 42.8           | 25             | 25             | 35             | 72 |                          |          |           |
|         | 4  |    | R1/2     | 15   | 31 | 34.3 | 21.8           |                | 27             | 37             | 77             |                |    |                          |          |           |

| 代码      | 类型  |     | 材质  |
|---------|-----|-----|-----|
| J-XZN51 | 迷你型 | 直通型 | PBT |



视角标准：第一视角

| 代码      | 类型  |        | 材质  |
|---------|-----|--------|-----|
| J-XZN61 | 迷你型 | 带排气节流阀 | PBT |



视角标准：第一视角

| 型号      |   | B  | L <sub>1</sub> | P <sub>1</sub> | P <sub>2</sub> | P <sub>3</sub> | C    | 有效断面积 (mm <sup>2</sup> ) |          | 重量 (g) |
|---------|---|----|----------------|----------------|----------------|----------------|------|--------------------------|----------|--------|
| 代码      | D |    |                |                |                |                |      | IN → OUT                 | OUT → EX |        |
| J-XZN51 | 4 | 34 | 11             | 8.4            | 10             | 9              | 11   | 1.8                      | 1.8      | 3.3    |
|         | 6 | 37 | 12             | 10.4           | 12             | 11             | 11.6 | 4                        | 4        | 4.9    |

| 型号      |   | 公称<br>型号 |
|---------|---|----------|
| 代码      | D |          |
| J-XZN01 | 6 | 2        |
|         | 8 | 1        |

| 型号     |   | P  | 公称<br>型号 |
|--------|---|----|----------|
| 代码     | D |    |          |
| J-XZN1 | 6 | 10 | 2        |
|        | 8 |    | 1        |

| 型号      |   | B  |
|---------|---|----|
| 代码      | D |    |
| J-XZN51 | 4 | 34 |
|         | 6 | 37 |



|    |      |      |
|----|------|------|
| 数量 | 1~29 | 30~  |
| 价格 | 100% | 另行报价 |



交货期  
9