

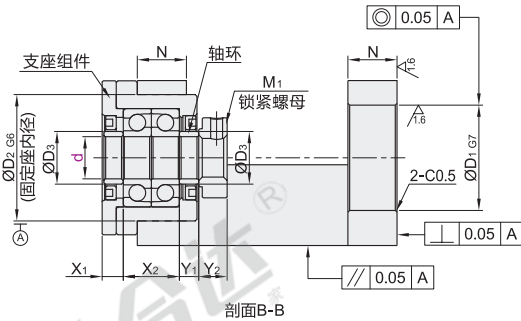


代码	类型		材质		表面处理		附件
			主体	丝杠支座组件	主体	丝杠支座组件	
LEF40	整合型传动座	简易型	铝合金	S50C	喷细砂本色阳极氧化	发黑	调整环:2个 锁紧螺母:1个

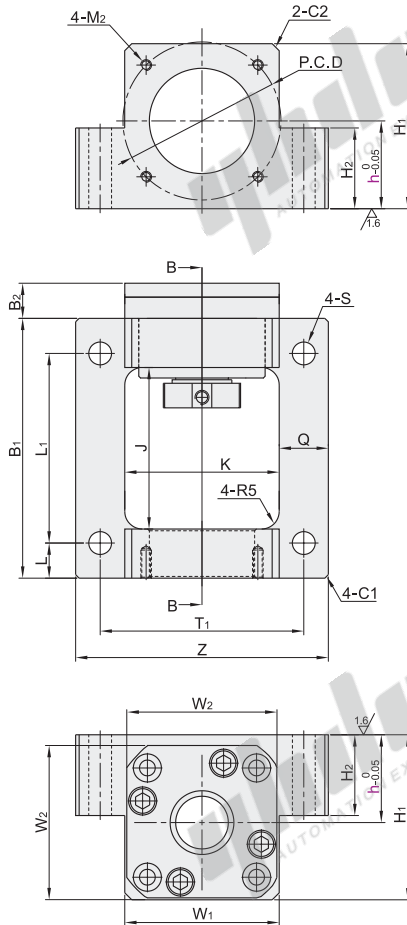

适用规格: LEF40-d20-F60



视角标准: 第一视角

型号				适用 电机类型	D ₁	P.C.D	M ₂	B ₁	B ₂	D ₂	D ₃	Z	H ₁	H ₂	J	K	L
代码	适用丝杠轴径	适用电机法兰	中心高														
	d	F	h														
LEF40	8	38	21	伺服电机	30	45	M3	67	9	28	11.5	64	41	19	43	40	10
		40				46	M4										
	10	38	25		30	45	M3	74	10	34	14	70	46	23	46	42	10
		40				46	M4										
	12	38	31		50	45	M3	84	15	36	15	72	47	26	56	62	13
		40				46	M4										
	15	60	41		70	90	M5	106	15	40	20	98	62	36	72	82	16
		80				97	61										
	20	60	35		50	70	M5	117	22	57	25	116	70	30	69	70	20
		80				90	M6										

适用丝杠轴径 d	适用电机法兰 F	N	Q	L ₁	T ₁	W ₁	W ₂	X ₁	X ₂	Y ₁	Y ₂	M ₁ (细牙螺纹)	S	丝杠支座		建议电机规格	
														固定侧	建议支撑侧	止口规格	安装P.C.D
8	38 40	12	12	47	52	40	35	5	14	5.5	6.5	M8×1.0	5.5	LEB01-8	—		45 46
10	38 40	14	14	54	56	42	42	6	16	5.5		M10×1.0	6.5	LEB01-10	LEB31-10	30	45 46
12	38 40				58	44	44					M12×1.0		LEB01-12	LEB31-12		45 46
15	60 80	17	18	58 71	80	62	52	8	18	10		M15×1.0	8.5	LEB33-12	LEB33-15	50	70
	23			74	106	82								LEB33-1541			70
20	60 80	24	23	77 87	94 106	70 82	68	14	28	11	11	M20×1.0	10.5	LEB01-20	LEB33-20	50	70 90



代码	型号		
	适用丝杠轴径 d	适用电机法兰 F	中心高 h
LEF40	8	38	21

LEF40—d8—F38—h21



未税价(元)

数量	优惠价	
	1~4	5~
价格	100%	另行报价



交货期
7