

带肩型无油衬套

标准型/薄壁型 铜合金

代码	类型	材质	内径公差	外径公差
OFN01	带肩型	标准型	高力黄铜(SP2)	E7
OFN02	带肩型	薄壁型	镶嵌固体润滑剂	r6




RoHS


特点

- 自润滑、免维护，适用于重载、低速运动；
- 耐磨性优异，适用于直线、旋转、摇摆运动；
- 耐高温、低温，抗冲击性强。
- ① 与本产品相配轴径公差：d8重载、e7轻载、g6高精度(仅供参考)。
- ② 与本产品相配固定座直径公差：H7(仅供参考)。
- ③ 产品压入座孔时在座孔端部或者内壁涂抹少许润滑油，利用油压机或台钳将其慢慢压入座孔，请勿用力敲击产品，以免引起产品变形。

标准型 OFN01

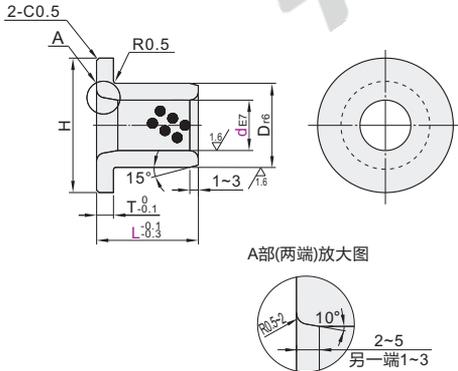

薄壁型 OFN02

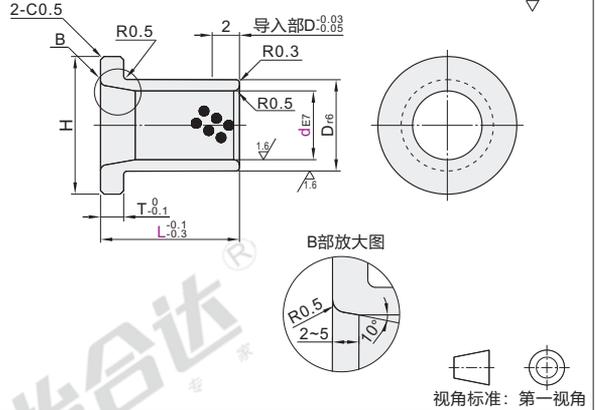

标准型

代码	型号	dE7	L							D r6		H	T
OFN01	5	+0.032	10	12	15				9	+0.028	14	2	
	6	+0.020	10	12	15	20			10	+0.019	16		
	8	+0.040	10	12	15	20	25		12		20		
	10	+0.025	10	12	15	20	25	30	35	14	+0.034	22	3
	12		10	12	15	20	25	30	35	18	+0.023	25	
	13		10	12	15	20	25	30	35	19		26	
	15	+0.050	10	12	15	20	25	30	35	21		28	5
	16	+0.032	10	12	15	20	25	30	35	22	+0.041	29	
	18		15	20	25	30	35	40	50	24	+0.028	32	
	20		15	20	25	30	35	40	50	30		40	5
	25	+0.061	15	20	25	30	35	40	50	35		45	
	30	+0.040	20	25	30	35	40	50	60	40		50	
	35		20	25	30	35	40	50	60	45	+0.050	60	
	40	+0.075	20	25	30	35	40	50	60	50	+0.034	65	
	50	+0.050	30	35	40	50	60			60	+0.060	75	

薄壁型

代码	型号	dE7	L							D r6		H	T
OFN02	5	+0.032	10	12	15				7		11	2	
	6	+0.020	10	12	15	20			8	+0.028	12		
	8	+0.040	10	12	15	20			10	+0.019	14		
	10	+0.025	10	12	15	20	25	30		12		16	3
	12		10	12	15	20	25	30		15		21	
	13		10	12	15	20	25	30		16	+0.034	22	
	15	+0.050	10	12	15	20	25	30		18	+0.023	24	4
	16	+0.032	10	12	15	20	25	30		20		26	
	20		15	20	25	30	40	50		24	+0.041	32	
	25	+0.061	20	25	30	40	50			29	+0.028	37	4
	30	+0.040	25	30	40	50			34		42		

标准型

代码	型号	d	L
OFN01	d5	5	12
	d6	6	10 12

OFN01-d5-L10



数量	1~9	10~
价格	100%	另行报价



请按图示订货