


深沟球轴承

接触式

双面带橡胶密封圈型

品牌	轴承类型 代码	轴承精度	轴承游隙	后置代码	轴承材质		保持架 材质
					国标	相当	
TIMKEN	6	P0	标准游隙(CN/C0)	2RS(双面带橡胶密封圈接触式)	GCr15	SUJ2	钢

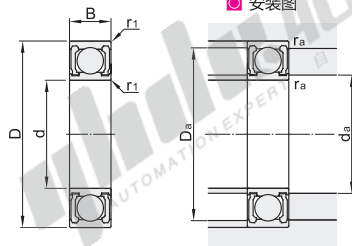

TIMKEN

安装图



视角标准：第一视角

型号 代码	主要尺寸(mm)				基本额定载荷(KN)		极限转速(rpm)		安装相关尺寸(mm)				重量 (kg) 参考
	d	D	B	r ₁ (min)	Cr(动)	Cor(静)	脂润滑	油润滑	d _a (min)	d _a (max)	D _a (max)	r _a (max)	
6000-2RS-TIMKEN	10	26	8	0.3	4.55	1.97	30000	36000	12	13.5	24.1	0.3	0.02
6200-2RS-TIMKEN		30	9	0.6	5.1	2.39	25000	30000	12.7	16	26	0.6	0.03
6300-2RS-TIMKEN		35	11		8.1	3.45	23000	27000	14	17	31		0.05
6001-2RS-TIMKEN	12	28	8	0.3	5.1	2.39	28000	32000	14	16	26	0.3	0.02
6201-2RS-TIMKEN		32	10	0.6	6.8	3.05	22000	28000	14.7	17	28	0.6	0.04
6301-2RS-TIMKEN		37	12	1	9.75	4.25	20000	24000	16.7	18.5	32	1	0.06
6002-2RS-TIMKEN	15	32	9	0.3	5.6	2.84	24000	28000	17	19	30	0.3	0.03
6202-2RS-TIMKEN		35	11	0.6	7.65	3.7	20000	24000	17.9	20	31	0.6	0.05
6302-2RS-TIMKEN		42	13	1	11.4	5.4	17000	21000	19.8	23	37	1	0.08
6003-2RS-TIMKEN	17	35	10	0.3	6	3.25	22000	26000	19	21.5	33	0.3	0.04
6203-2RS-TIMKEN		40	12	0.6	9.55	4.8	18000	21000	20	23.5	36	0.6	0.07
6303-2RS-TIMKEN		47	14	1	13.6	6.55	16000	19000	22	25.5	42	1	0.12
6004-2RS-TIMKEN	20	42	12	0.6	9.4	5	18000	21000	24	26	38	0.6	0.07
6204-2RS-TIMKEN		47	14	1	12.8	6.6	16000	18000	24.6	28	42	1	0.11
6304-2RS-TIMKEN		52	15	1.1	15.9	7.9	14000	17000	25.8	28.5	45.5	1.1	0.14
6005-2RS-TIMKEN	25	47	12	0.6	10.1	5.85	15000	18000	29	30.5	43	0.6	0.08
6205-2RS-TIMKEN		52	15	1	14	7.9	13000	16000	30	32	47	1	0.13
6305-2RS-TIMKEN		62	17	1.1	23.6	12.1	12000	14000	31	36	55.5	1.1	0.23
6006-2RS-TIMKEN	30	55	13		13.2	8.3	13000	15000	35	37	50		0.12
6206-2RS-TIMKEN		62	16	1	19.5	11.3	11000	13000	35	39	57	1	0.20
6306-2RS-TIMKEN		72	19	1.1	26.7	15	10000	12000	36.5	43	65.5	1.1	0.35
6007-2RS-TIMKEN	35	62	14	1	16	10.3	12000	14000	40	42	57	1	0.16
6207-2RS-TIMKEN		72	17	1.1	25.7	15.3	9800	11000	41	45	65.5	1.1	0.29
6307-2RS-TIMKEN		80	21	1.5	33.5	19.2	8800	10000	42.9	47	72	1.5	0.46
6008-2RS-TIMKEN	40	68	15	1	16.8	11.5	10000	12000	45	47.5	63	1	0.19
6208-2RS-TIMKEN		80	18	1.1	29.1	17.9	8700	10000	46	51	73.5	1.1	0.37
6308-2RS-TIMKEN		90	23	1.5	40.5	24.1	7800	9200	48	54	82	1.5	0.63
6009-2RS-TIMKEN	45	75	16	1	20.9	15.2	9200	11000	50	53.5	70	1	0.25
6209-2RS-TIMKEN		85	19	1.1	32.5	20.5	7800	9300	51	55.5	78.5	1.1	0.41
6309-2RS-TIMKEN		100	25	1.5	53	32	7000	8200	53	61.5	92	1.5	0.83
6010-2RS-TIMKEN	50	80	16	1	21.8	16.6	8500	10000	55	58.5	75	1	0.26
6210-2RS-TIMKEN		90	20	1.1	35	23.2	7100	8600	56	60	83.5	1.1	0.46
6310-2RS-TIMKEN		110	27	2	62	38	6400	7500	59	68.5	101	2	1.07
6011-2RS-TIMKEN	55	90	18	1.1	28.3	21.3	7700	9000	61.5	64.2	83.5	1.1	0.38
6211-2RS-TIMKEN		100	21	1.5	43.5	29.3	6400	7700	62	67	92	1.5	0.61
6311-2RS-TIMKEN		120	29	2	71.5	44.5	5800	6800	64	74	111	2	1.37
6012-2RS-TIMKEN	60	95	18	1.1	29.4	23.2	7100	8500	66.5	69.1	88.5	1.1	0.42
6212-2RS-TIMKEN		110	22	1.5	52.5	36	6000	7100	68	75	102	1.5	0.78
6312-2RS-TIMKEN		130	31	2.1	82	52	5400	6300	71	80.5	119	2.1	1.70
6013-2RS-TIMKEN	65	100	18	1.1	30.5	25.2	6700	8000	71.5	74	93.5	1.1	0.44
6213-2RS-TIMKEN		120	23	1.5	57	40	5500	6500	73	80.5	112	1.5	0.99
6313-2RS-TIMKEN		140	33	2.1	92.5	59.5	4900	6000	76	86	129	2.1	2.08
6014-2RS-TIMKEN	70	110	20	1.1	38	31	6100	7100	76.5	80.5	103.5	1.1	0.61
6214-2RS-TIMKEN		125	24	1.5	62	44	5100	6300	78	85	117	1.5	1.07
6314-2RS-TIMKEN		150	35	2.1	104	68	4600	5400	81	92.5	139	2.1	2.52
6015-2RS-TIMKEN	75	115	20	1.1	39.5	33.5	5700	6700	81.5	85.6	108.5	1.1	0.65
6215-2RS-TIMKEN		130	25	1.5	66	49.5	4800	5600	83	90.5	122	1.5	1.18
6315-2RS-TIMKEN		160	37	2.1	113	77	4300	5000	86	99	149	2.1	3.02
6016-2RS-TIMKEN	80	125	22	1.1	47.5	39.5	5300	6300	86.5	91.5	118.5	1.1	0.86
6216-2RS-TIMKEN		140	26	2	72.5	53	4500	5300	89	95.5	131	2	1.40



请按图示订货

型号

6000-2RS-TIMKEN
6200-2RS-TIMKEN



未税价(元)

优惠价

数量 1~49 50~
价格 100% 另行报价



交货期

7