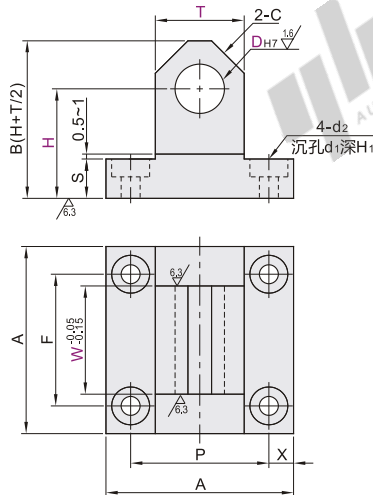


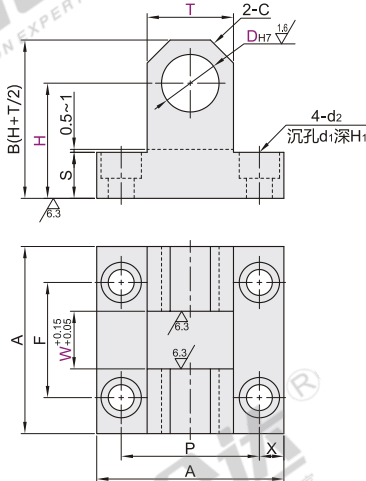


代码	类型	材质		表面处理
		国标	相当	
WIU01	中央支点型	45	S45C	发黑
WIU02				无电解镀镍
WIU21				发黑
WIU22	双耳环型			无电解镀镍

单耳环型
WIU01/02双耳环型
WIU21/22

型号	T	W	H	A	F	P	X	S	d2	d1	H1	C
代码	D _{H7}	选择	最小单位1	最小单位1								
单耳环型 WIU01 WIU02	4	12	4~8	20~30	32	18	22	5				3
	5	16	5~10				27	5.5				4
	6	19			38	27	28.5	4.75	7.5	4.5	4.5	5
	8	16	6~12				27	5.5				4
	10	19		25~35			28.5	4.75				5
	12	22	8~16		45	32	32	6.5				5
	14	25					33.5	5.75				6
	16	19					32	6.5				5
	20	22	10~20	30~40			36	7	9.5	5.5	9.5	5.5
	25	25	12~30		50	35	37	6.5				6
双耳环型 WIU21 WIU22	13	22	13~30				36	7				6
	14	25					43	8.5				7
	15	30		35~45	60	40	45	7.5	11.5	6.5	11	6.5
	16	25	14~30				43	8.5				7
	20	30					45	7.5				8
	25	30					43	8.5				7
	20	30	20~35	40~50	65		45	7.5				8
	25	38			70	45	48	8.5				8
	25	38	25~35				54	8	16	9	14	9
	25	38										11

■ 孔径(D_{H7})，厚度(T)单侧壁厚一览表

D _{H7}	铰链座标准型		铰链座厚臂型			
	T	单侧壁厚 (T-D _{H7})/2	T	单侧壁厚 (T-D _{H7})/2	T	单侧壁厚 (T-D _{H7})/2
4	9	2.5	12	4	—	—
5	12	3.5	16	5.5	7	7
6	12	3	16	5	19	6.5
8	16	4	19	5.5	22	7
10	16	3	19	4.5	22	6
12	19	3.5	22	5	25	6.5
13	19	3	22	4.5	25	6
14	22	4	25	5.5	30	8
15	22	3.5	25	5	30	7.5
16	22	3	25	4.5	30	7
20	25	2.5	30	5	38	9
25	30	2.5	38	6.5	—	—

① 可根据使用的负载选择孔的单侧壁厚。



请按图示订货



未税价(元)

型号	T	W	H
代码	D _{H7}	选择	最小单位1
WIU01	4	12	4~8
WIU02	5	16	5~10
WIU01—D5—T16—W8—H20			

● 优惠价
数量 1~19 20~
价格 100% 另行报价



交货期
5