


内螺纹型

代码	类型	材质		硬度	表面处理
		国标	相当		
YNF01	带六角平头型 内螺纹型	45	S45C	—	发黑
YNF02				淬火硬度43~48HRC	
YNF03				淬火硬度43~48HRC, 镀层硬度850HV~	
					镀硬铬, 镀层厚度3~5μm

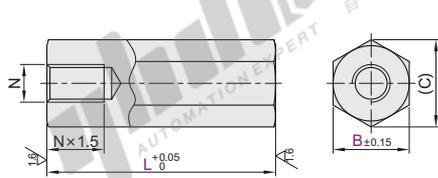

视角标准: 第一视角

型号		最小单位0.01	(C)	N
代码	B	L		
YNF01 YNF02 YNF03	6	10.00~55.00	6.9	M3
	7	15.00~55.00	8.1	M4
	8		9.2	M5
	10		11.5	M6
	12		13.9	M8
	13		15	
	14	20.00~85.00	16.2	
	17		19.6	
	19		21.9	
	24		27.7	



代码	B	L	(C)
YNF01	6	10~35	6.9
YNF02	7		8.1


YNF01—B6—L25

数量	1~4	5~
价格	100%	另行报价



外螺纹型

代码	类型	材质		硬度	表面处理
		国标	相当		
YNF21	带六角平头型 外螺纹型	45	S45C	—	发黑
YNF22				淬火硬度43~48HRC	
YNF23				淬火硬度43~48HRC, 镀层硬度850HV~	
					镀硬铬, 镀层厚度3~5μm

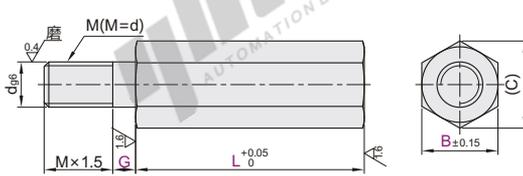

视角标准: 第一视角

① 工艺孔加工条件: G≠0;总长度≥70。(工艺孔详细尺寸见产品简介)

代码	型号	B	最小单位0.01	最小单位1	(C)	d	M
			L	G			
YNF21 YNF22 YNF23	6		6.9		6.9		
	7		10.00~55.00		8.1	4	M4
	8		15.00~55.00		9.2		
	10				11.5	5	M5
	12			0或	13.9		
	13			2 ≤ G ≤ d × 2	15	6	M6
	14	20.00~85.00			16.2		
	17				19.6	8	M8
	19				21.9		
	24				27.7	10	M10



代码	技术说明
MD	增加螺纹根部退刀槽

代码	技术说明
AC	增加螺丝刀槽

可加工 (Processable)



代码	B	L	G	代码	B	L	G	可加工代码
YNF21	6	10~35	0或	YNF21	6	10~35	0或	MD AC
YNF22	7	2 ≤ G ≤ d × 2		YNF22	7	2 ≤ G ≤ d × 2		

YNF21—B6—L25—G2 YNF21—B6—L25—G2—AC



数量	1~4	5~
价格	100%	另行报价

