


圆皮带用惰轮

◀ 双联型

代码	类型	材质		表面处理	附件
		国标	相当		
ENW01	双联型	LF2	A5052	喷细砂本色阳极氧化	挡圈 (SUS304)
ENW11		0Cr18Ni9	SUS304	—	

① 特殊环境(洁净环境等)要求如需更换密封轴承请联系怡合达。

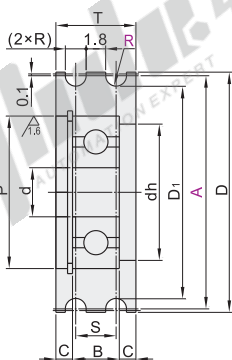

② 轴承精度: GB/T 307.1 0 级
相当于: JIS B 1514 0 级

③ 轴承采用压入式。

视角标准: 第一视角

型号		R	S	d	P	dh	D	D ₁	T	B	C	使用轴承	适用圆皮带直径	
代码	A													
ENW01 ENW11	15			3	10	8	17	13	9	4		BAF623ZZ	2	
	20	1.1	4	4	13	11	22	18	10	5	2.5	BAF624ZZ		
	30			6	19	16	32	28	11	6		BAF626ZZ	3	
	20			4	13	11	22	17	11	5	3	BAF624ZZ		
	30	1.6	5	6	19	16	32	27	11	6	2.5	BAF626ZZ	3	
	40			10	26	23	42	37	14	8	3	BAY6000ZZ		
	45						47	42						
	23				15	13	25	19		5	4	BAF696ZZ		
	28			6	19	16	30	24	13					
	30	2.1	6				32	26		6	3.5	BAF626ZZ	4	
	40						42	36						
	45				10	26	23	47	41	14	8	3	BAY6000ZZ	
	48						50	44						
	28				8	19	16	30	23	15	6	4.5	BAF698ZZ	
	40	2.6	7		10	26	23	42	35		8	4	BAY6000ZZ	5
	50				12	32	27	52	45	16	10	3	BAY6201ZZ	
	28				6	19	16	30	22	17	6	5.5	BAF626ZZ	
	38				10	26	23	40	32		8	5	BAY6000ZZ	
	48						50	42						
	50	3.1	8				52	44						6
60						62	54	18						
75				12	32	27	77	69		10	4	BAY6201ZZ		
100						102	94							
50						52	42							
60	4.1	10		12	32	27	62	52	21	10	5.5	BAY6201ZZ	8	
100				15	35	30	102	92		11	5	BAY6202ZZ		
60						62	50							
100	5.1	12		15	35	30	102	90	25	11	7	BAY6202ZZ	10	
140						142	130							

滑
惰
轮

F8



型号		R	S
代码	A		
ENW01	20	30	5
ENW11	30		

ENW11 — A30 — R1.6



● 优惠价
数量 1~9 10~
价格 100% 另行报价



交货期
1

怡合达
AUTOMATION EXPERT