

止推型无油衬套


标准型/锥孔型/沉孔型 铜合金

代码	类型	材质	内径公差	外径公差
Y-GSA15	标准型	高力黄铜(SP2)	E7	r6
Y-GSA16	锥孔型	高力黄铜(SP2)	F7	m6
Y-GSA17	沉孔型	镶嵌固体润滑剂	F7	m6




RoHS


标准型
Y-GSA15

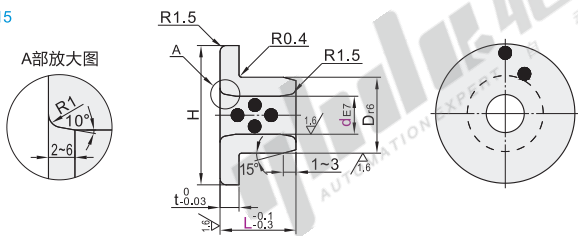

锥孔型
Y-GSA16

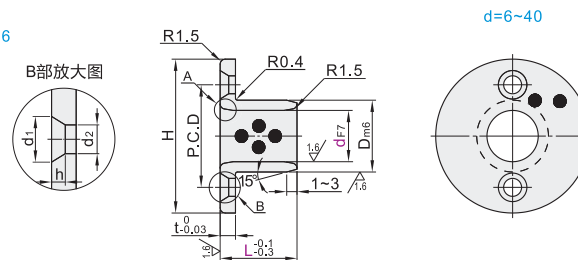

沉孔型
Y-GSA17

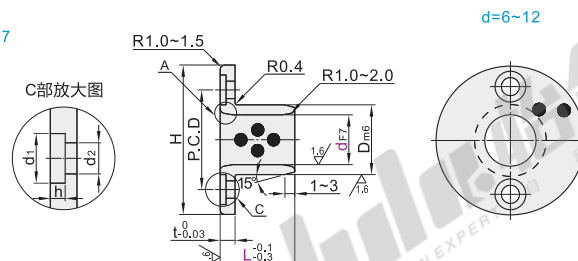

① 与本产品相配固定座直径公差: H7(仅供参考)。

视角标准: 第一视角

代码	型号	dE7	L	Dm6	H	t
标准型 Y-GSA15	6	+0.022 +0.010	10 12 14	12	22	
	8	+0.040 +0.025	10 12 14 15	14	25	
	10		10 12 14 15 20 25	16		
	12		10 12 14 15 20 25	18	30	3
	13		10 12 14 15 20 25	19		
	15	+0.050 +0.032	12 14 15 20 25	21		
	16		12 14 15 20 25 30	22	35	
	18		14 15 20 25 30 35 40	24	40	
	20		14 15 20 25 30 35 40 45	28	45	
	25	+0.061 +0.040	14 15 20 25 30 35 40 45	33	50	5
	30		15 20 25 30 35 40 45 50	38	55	
	35		15 20 25 30 35 40 45 50	44	65	
	40	+0.075 +0.050	25 30 35 40 45 50	50	70	7
	50		25 30 35 40 45 50 60	62	90	8



请按图示订货



未税价(元)

标准型

代码	d	L
Y-GSA15	6 8 10 12 14 15	10 12 14 15

Y-GSA15—d6—L10

优惠价

数量	1~9	10~
价格	100%	另行报价

型号		L		Dm6		Y-GSA16							Y-GSA17							
代码	dF7					H	安装孔				t	H	安装孔				适用内六角薄圆柱头螺钉 (需另行采购)		t	
		P.C.D	d1	d2	h	沉头						P.C.D	d1	d2	h					
锥孔型 Y-GSA16	6	+0.022 +0.010	10	12	15	10	+0.015 +0.006	25	15				25	17						
	8	+0.028 +0.013	10	12	15 20	12		28	18				27	19	6	3.5	2.2	M3×10(2个)	4	
	10		12	15	20 25	14	+0.018 +0.007	30	20				29	21				M4×12(2个)		
	12		12	15	20 25	18		40	28	8.5	3.5	2.5	M3	3	36	26			M4×12(2个)	
	15	+0.034 +0.016	12	15	20 25	21							39	29					M4×12(4个)	5
沉孔型 Y-GSA17	16		12	15	20 25 30 35	22	+0.021 +0.008	50	35				40	30	7.5	4.5	3			
	18		15	20	25 30 35	24							42	32						
	20		15	20	25 30 35 40	28							49	38	9	5.5	3.7	M5×16(4个)	6	
	25	+0.041 +0.020	15	20	25 30 35 40	33		55	40	13	6	3.5	M5	5	54	43				
	30		20	25	30 35 40 45	38	+0.025 +0.009	60	45				63	50	11	6.6	4.2	M6×20(4个)	8	
	35		20	25	30 35 40 45	44		70	52				69	56						
	40	+0.050 +0.025	25	30	35 40 45	50		80	60	16	7	4.5	M6	7	82	66	14	9	5.2	M8×25(4个)
50		25	30	35 40 45	62	+0.030 +0.011	100	75				8	94	78						

① 沉头螺钉需另行采购。