

圆弧型 ▶ 平皮带用滑轮

L=20~100


代码	类型	材质		表面处理
		国标	相当	
ENE01	圆弧型	无法兰型	LF2	A5052 喷细砂本色阳极氧化
ENE06	圆弧型	蓝色POM	蓝色POM	—
ENE02	带法兰型	LF2	A5052	喷细砂本色阳极氧化

① POM材质轮子和皮带在运动过程中，因机构张紧力、启停、皮带硬度、皮带摩擦力等因素会造成磨损现象，如特殊环境工况请联系怡合达。




◎ 圆孔+螺孔型

无法兰型
ENE01/06

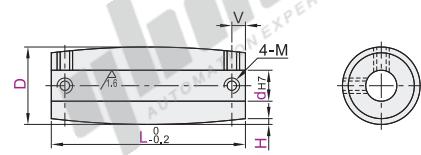

带法兰型
ENE02

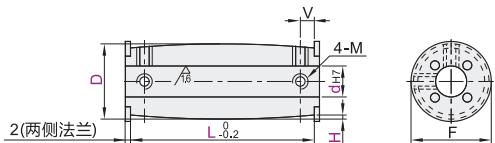

63°

◎ 键槽尺寸 N: 新JIS(B1301)键槽尺寸表


N _{H7}	b _{JS9}	t公差
8	3	±0.0125 1.4
10	+0.015	—
K10	4	1.8 ±0.0
12	+0.018	—
15	5	±0.0150 2.3
20	6	2.8
25	+0.021	—
30	8	±0.0180 3.3 ±0.2



视角标准：第一视角

◎ 键槽孔+螺孔型

无法兰型
ENE01



带法兰型
ENE02



◎ 圆孔+螺孔型

型号	d _{H7}	最小单位1		H	M	V	F
		L					
ENE01	15	8					—
ENE06	20	8					—
	10						—
	25	8					26
	10						—
	8						—
ENE01	30	10		M4	4	31	
ENE02	12						—
ENE06	10						—
ENE01	35	12				36	
ENE02	15		0.3				—
ENE06	12	20~100	0.5				—
ENE01	40	15				41	
ENE02	20						—
ENE06	15						—
ENE01	50	20		M5	4.5	51	
ENE02	25						—
ENE06	20						—
ENE01	60	25		M6	5	61	
ENE02	30						—
ENE06	25						—
ENE01	80	30		M8	6.5	81	
ENE02	35						—

◎ 键槽孔+螺孔型

型号	d	最小单位1		H	M	V	F
		N _{H7}	L				
ENE01	15	8					—
ENE02	20	8					—
	10 K10						—
	8						—
ENE01	25	10 K10					26
ENE02	12						—
	8						—
ENE01	30	10 K10					31
ENE02	12						—
	10 K10						36
ENE01	35	12					—
ENE02	15		20~100	0.3			M4
	12						M3
ENE01	40	15					41
ENE02	20						—
	15						M4
ENE01	50	20					4.5
ENE02	25						51
	20						—
ENE01	60	25					5
ENE02	30						61
	25						—
ENE01	80	30					M6
ENE02	35						6.5
	25						81

滑情

轮 轮

F8

◎ 键槽孔+螺孔型

型号	d	N _{H7}	最小单位1	H
ENE01	15	8	20~100	0.3
	20	8	20~100	0.3

请按图示订货



优惠价
数量 1~9 10~
价格 100% 另行报价

ENE01—D15—N8—L50—H0.3



ENE01/02

ENE06