

平皮带用滑轮


带肋槽直柱型

L=40~100


代码	类型	材质		表面处理
		国标	相当	
ENE11	带肋槽直柱型 无法兰型	LF2	A5052	喷细砂本色阳极氧化



圆孔+螺孔型

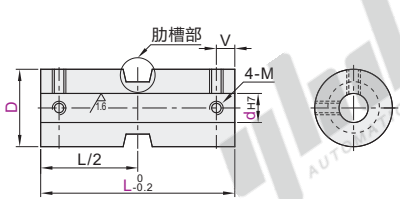


肋槽部



键槽尺寸 N: 新JIS(B1301)键槽尺寸表


NH7		bJS9		公差
8		3	±0.0125	1.4
10	+0.015 0			
K10		4		1.8 +0.1 0
12	+0.018 0	5	±0.0150	2.3
15		6		2.8
20		8	±0.0180	3.3 +0.2 0
25	+0.021 0			
30				

键槽孔+螺孔型

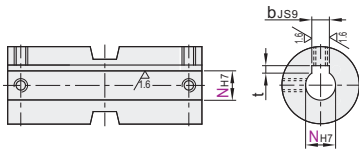

平皮带导条形状与滑轮肋槽避让尺寸参考图

平皮带导条形状 滑轮肋槽避让尺寸



其它规格尺寸请参考F4平皮带资料。

视角标准：第一视角

圆孔+螺孔型

型号	D	dH7	最小单位1	X	Y	Z	M	V
代码			L					
ENE11	30	8						
		10						
		12						
	35	10						
		12					M4	4
		15						
	40	12						
		15						
		20						
	50	15	40~100	10.0~16.0	5.0~15.0	6.0~8.0		
		20					M5	4.5
		25						
	60	20						
		25					M6	5
		30						
80	25							
	30					M8	6.5	
	35							

键槽孔+螺孔型

型号	D	NH7	最小单位1	X	Y	Z	M	V
代码			L					
ENE11	30	8						
		10 K10						
		12					M3	
	35	10 K10						
		12						4
		15					M4	
	40	12					M3	
		15	D≤50时 40~100				M4	
		20		10.0~16.0	5.0~15.0	6.0~8.0	M5	
	50	15	D=60/80时 60~100				M4	
		20					M5	4.5
		25						
	60	20						
		25						5
		30						
80	25					M6		
	30						6.5	
	30							

键槽孔+螺孔型

型号	D	NH7	最小单位1	X	Y	Z
代码			L			
ENE11	30	10	40~100	10.0~16.0	5.0~15.0	6.0~8.0

ENE11 - D30 - N8 - L80 - X10 - Y6 - Z5



优惠价	数量	价格
●	1~9	100%
●	10~	另行报价

交货期
5

滑
轮

F8

