


卡扣式圆形连接器

方法兰插座
防水型 锌合金

代码	类型	连接方式	材质			表面处理	
			外壳	绝缘体	接触体	外壳	接触体
ZIX78	防水型 方法兰插座	卡扣连接	锌合金	热塑塑料PPS (耐高温260°C)	铜	镀铬	镀金

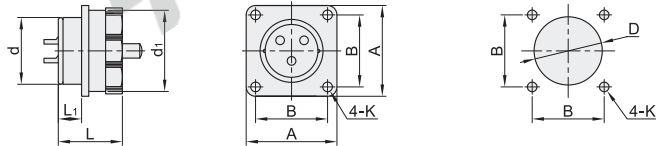

型号		规格	芯数	端头	d	d ₁	L ₁	L	B	A	D	K	额定电流 (A)	工作电压 (V)	耐压 (V)	接触电阻 (MΩ)	绝缘电阻 (MΩ)	适配插头代码									
ZIX78	Z (方法兰插座)		2	J(插针) K(插孔)									10	AC500	AC1500	2.5	2000	ZIX49									
			3																								
			4																								
			16										5	15.8	18	9.7			21.6	20	26	16.5	5	AC500	AC1500	5	
			7																								
			9										AC400	AC1200													
			10																								
			2																								
			3																								
			4																								
			20										5	19.8	22	9.8				22	29	20.5	3.2	10	AC500	AC1500	2.5
			6										5,25											5			5
			7										10											10			2.5
			9										5											5	AC400	AC1200	5
			12																								
			24										10	23.8	26	10			23	26	32	24.5		10	AC500	AC1500	2.5
			12																								
			19										5											5	AC400	AC1200	5
			7										25														1
			12																								
			16										10											10	AC500	AC1500	2.5
			28										17	27.8	30	9.8				30	36	28.5					
			20																								
			24										5											5	AC400	AC1200	5
26																											



请按图示订货

型号				
代码	外壳形状	规格	芯数	端头
ZIX78	Z	16	4	J(插针) K(插孔)

ZIX78—Z—16—4—K

性能表

接插方式	卡扣连接
接线方式	焊接
接插次数	500次
温度范围	-40°C~+85°C
防护等级	IP67