

丝杠支座组件






长高型 整合型传动座

代码	类型	材质		表面处理
		①	③④⑥	①③④⑥
LEF35	整合型传动座 长高型	铸铁	S45C	发黑

构成零件

编号	零件名称	数量
①	传动座本体	1
②	轴承	1组
③	压板	1
④	间隔环	2
⑤	油封	2
⑥	锁紧螺母	1组

- ① 使用之轴承经预压处理，轴向0间隙。
① 轴承采用P5配对DF组装，最适宜滚珠丝杠使用。

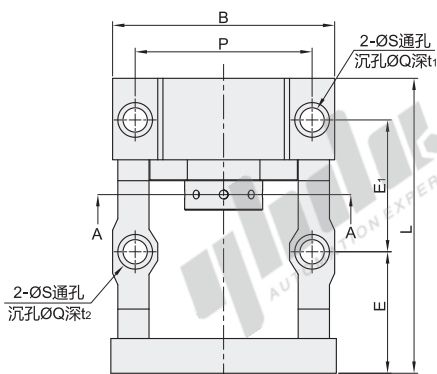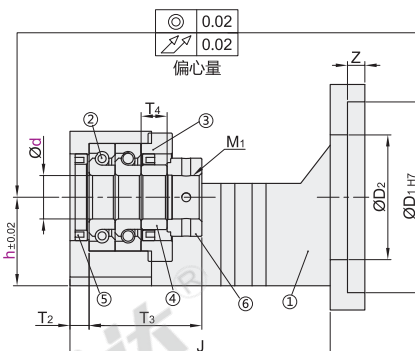

视角标准：第一视角

型号					适用 电机类型	ØD ₁	P.C.D	M	Z	ØD ₂	B	P	L	J	E	E ₁	S	Q	t ₁	t ₂	H	H ₁	W ₁	T ₂	T ₃	T ₄	M ₁	建议丝杠支座建议电机规格		
代码	适用丝杠轴径	适用电机法兰	中心高	支撑侧																								止口 规格	安装 P.C.D	
LEF35	25	100	48	伺服 电机	95	115	M8	10	72	130	102	170	150	70	76	14	20	11	2		86	67	76	11	59	14	M25×1.5	LEB71-25	95	115
		100A					M6																							
		100	51				M8																							
		100A					M6																							
		126	48				M8																							
		126	51				M6																							
	30	100	48	伺服 电机	110	130	M8	10	72	130	102	170	150	70	76	14	20	11	2		86	67	76	11	59	14	M25×1.5	LEB71-25	110	130
		100A					M6																							
		100	51				M8																							
		100A					M6																							
		126	48				M8																							
		126	51				M6																							
30	100	48	伺服 电机	110	130	M8	10	72	130	102	170	150	70	76	14	20	11	2		86	67	76	11	59	14	M30×1.5	LEB71-30	110	130	
	100A					M6																								
	100	51				M8																								
	100A					M6																								
	126	48				M8																								
	126	51				M6																								

① *带A为安川电机，不带为其它品牌电机。



请按图示订货

代码	型号		
	适用丝杠轴径	适用电机法兰	中心高
LEF35	25	100	48
		100A	

LEF35—d25—F100—h48



未税价(元)

优惠价

数量	1~4	5~
价格	100%	另行报价



交货期

7
