


标准型 圆形连接器

面板安装螺母型母插座

WS系列 威浦品牌

系列	类型	接插方式	材质		
			外壳	绝缘体	接触体
WS系列	面板安装螺母型母插座	螺钉连接	锌铝合金(镀铬)	热塑塑料PPS(耐高温260°C)	铜(镀金)

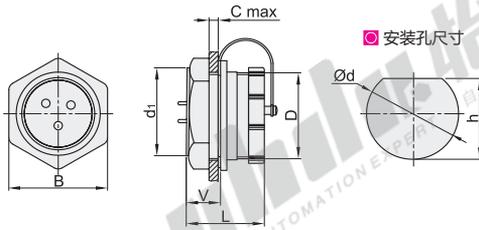

WEIPU® 威浦电器


插座与面板配合直径	16	20	24	28
d1	M16×1	M20×1	M24×1	M28×1
D	M18×1	M22×1	M26×1	M30×1
C	5	5	5	5
V	9.7	9.9	10	10.2
L	22	23	23	23
B	21.2	25.5	29.2	33.3
Ød	15.7	19.7	23.9	27.7
h	15.3	19.3	23.2	26.9

单位: mm




孔位排列图(从针的方向看)


WS16系列




WS20系列



WS24系列



WS28系列



代码	插座与面板配合直径	芯数	接插件种类	接线方式	适配插针类型		
					中继公插头	弯角公插头	
WS16K2ZM	16	2	插孔	焊接	WS16J2TQ		
WS16K3ZM		3			WS16J3TQ		
WS16K4ZM		4			WS16J4TQ		
WS16K5ZM		5			WS16J5TQ	—	
WS16K7ZM		7			WS16J7TQ		
WS16K9ZM		9			WS16J9TQ		
WS16K10ZM		10			WS16J10TQ		
WS20K2ZM		20			2	WS20J2TQ	WS20J2TS
WS20K3ZM					3	WS20J3TQ	WS20J3TS
WS20K4ZM					4	WS20J4TQ	WS20J4TS
WS20K5ZM	5		WS20J5TQ	WS20J5TS			
WS20K7ZM	7		WS20J7TQ	WS20J7TS			
WS20K9ZM	9		WS20J9TQ	WS20J9TS			
WS20K12ZM	12		WS20J12TQ	WS20J12TS			
WS24K2ZM	24		2	WS24J2TQ	WS24J2TS		
WS24K3ZM			3	WS24J3TQ	WS24J3TS		
WS24K4ZM			4	WS24J4TQ	WS24J4TS		
WS24K9ZM		9	WS24J9TQ	WS24J9TS			
WS24K10ZM		10	WS24J10TQ	WS24J10TS			
WS24K12ZM		12	WS24J12TQ	WS24J12TS			
WS24K19ZM		19	WS24J19TQ	WS24J19TS			
WS28K3ZM		28	3	WS28J3TQ	WS28J3TS		
WS28K4ZM			4	WS28J4TQ	WS28J4TS		
WS28K7ZM			7	WS28J7TQ	WS28J7TS		
WS28K8ZM	8		WS28J8TQ	WS28J8TS			
WS28K10ZM	10		WS28J10TQ	WS28J10TS			
WS28K12ZM	12		WS28J12TQ	WS28J12TS			
WS28K16ZM	16		WS28J16TQ	WS28J16TS			
WS28K20ZM	20		WS28J20TQ	WS28J20TS			
WS28K24ZM	24		WS28J24TQ	WS28J24TS			
WS28K26ZM	26		WS28J26TQ	WS28J26TS			

① 适配插针: 中继公插头详见P557, 弯角公插头详见P558.

② 插座与面板配合直径为16的连接器无防尘盖.

电气技术特性

WS16系列

芯数	2	3	4	5	7	9	10
额定电流(A)	10		5				
接触件直径	Ø1.5×2	Ø1.5×3	Ø1×4	Ø1×5	Ø1×7	Ø1×9	Ø1×10
工作电压(V)	500			400			
耐压(V)	1500			1200			
接触电阻(mΩ)	2.5		5				
线规(mm²/AWG)	≤2/14		≤0.75/18				

WS20系列

芯数	2	3	4	5	7	9	12
额定电流(A)	25		10				
接触件直径	Ø2.5×2	Ø2.5×3	Ø2.5×4	Ø1.5×5	Ø1.5×7	Ø1×9	Ø1×12
工作电压(V)	500			400			
耐压(V)	1500			1200			
接触电阻(mΩ)	1		2.5		5		
线规(mm²/AWG)	≤4/11		≤2/14		≤0.75/18		

WS24系列

芯数	2	3	4	9	10	12	19
额定电流(A)	25		5.25		10		5
接触件直径	Ø2.5×2	Ø2.5×3	Ø2.5×4	Ø1×5.025×4	Ø1.5×10	Ø1.5×12	Ø1×19
工作电压(V)	500			400			
耐压(V)	1500			1200			
接触电阻(mΩ)	1		5.1		2.5		5
线规(mm²/AWG)	≤4/11		≤0.75/18, ≤4/11		≤2/14		≤0.75/18

WS28系列

芯数	3	4	7	8	10	12	16	20	24	26	
额定电流(A)	50		25			10					
接触件直径	Ø3.5×3	Ø2.5×4	Ø2.5×7	Ø2.5×8	Ø2.5×10	Ø1.5×12	Ø1.5×16	Ø1×20	Ø1×24	Ø1×26	
工作电压(V)	500			400							
耐压(V)	1500			1200							
接触电阻(mΩ)	0.5		1		2.5		5				
线规(mm²/AWG)	≤10/7		≤4/11		≤2/14		≤0.75/18				

技术参数

接插方式	螺钉连接
接线方式	焊接: Ø1, Ø2.5, Ø3.5, Ø5.5
接插次数	500
温度范围	-40°C ~ +85°C
绝缘电阻	2000MΩ



请按图示订货

代码
WS16K2ZM
WS16K3ZM
WS16K2ZM