


视角标准：第一视角

代码	类型	材质	最大压缩量
YSWY	超大压缩量	油冷回火弹簧钢	L×65%

■ L尺寸公差

L	公差
50以下	±0.5
50以上	±1.5%

- ① 载荷(±10%)
- ① 直角度(3°以下)
- ① 载荷(N)=定数(N/mm)×压缩量
- ① 使用次数：100万次(L×70%为30万次)
- ① 耐热温度为150°C
- ① 1kgf=9.81N
- ① 压紧长度为参考值，制作时会
有少许差异。
- ① 弹簧颜色和圈数可能会因生产
批次不同而异，但产品性能均
符合标准，不影响使用！

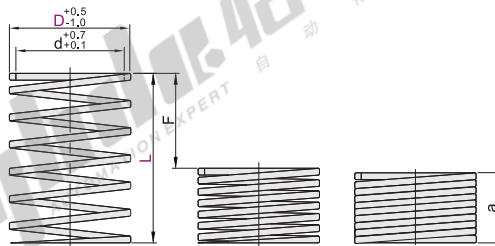

型号	内径	弹簧常数	a	使用方法
代码 D L d	N/mm	压紧长度 Fmm	负载N	F=L×65%
20	2.26	5	13.0	
25	1.81	6.3	16.3	
30	1.51	7.5	19.5	
35	1.29	8.8	22.8	
40	1.13	10	26.0	
45	1.01	11.3	29.3	
50	0.91	12.5	32.5	
55	0.82	13.8	35.8	29.4
60	0.75	15	39.0	
65	0.70	16.3	42.3	
70	0.65	17.5	45.5	
75	0.60	18.8	48.8	
80	0.57	20	52.0	
90	0.50	22.5	58.5	
100	0.45	25	65.0	
20	3.08	5	13.0	
25	2.46	6.25	16.3	
30	2.06	7.5	19.5	
35	1.76	8.75	22.8	
40	1.54	10	26.0	
45	1.37	11.25	29.3	
50	1.23	12.5	32.5	
55	1.12	13.75	35.8	
60	1.03	15	39.0	40.2
65	0.95	16.25	42.3	
70	0.88	17.5	45.5	
75	0.82	18.75	48.8	
80	0.77	20	52.0	
90	0.69	22.5	58.5	
100	0.62	25	65.0	
110	0.56	27.5	71.5	
120	0.51	30	78.0	
125	0.49	31.25	81.3	
20	7.02	5.0	13.0	
25	5.6	6.25	16.3	
30	4.7	7.5	19.5	
35	4.02	8.75	22.8	
40	3.53	10	26.0	
45	3.14	11.25	29.3	
50	2.84	12.5	32.5	
55	2.55	13.75	35.8	
60	2.35	15	39.0	
65	2.16	16.25	42.3	91.1
70	1.96	17.5	45.5	
75	1.86	18.75	48.8	
80	1.76	20	52.0	
90	1.57	22.5	58.5	
100	1.37	25	65.0	
110	1.27	27.5	71.5	
120	1.17	30	78.0	
125	1.08	31.25	81.3	
150	0.93	37.5	97.5	
30	5.59	7.5	19.5	
35	4.80	8.75	22.8	
40	4.21	10	26.0	109.3
45	3.72	11.25	29.3	
50	3.33	12.5	32.5	
55	3.04	13.75	35.8	

型号	内径	弹簧常数	a	使用方法
代码 D L d	N/mm	压紧长度 Fmm	负载N	F=L×65%
60	2.84	15	39.0	
65	2.55	16.25	42.3	
70	2.35	17.5	45.5	
75	2.26	18.75	48.8	
80	2.06	20	52.0	
90	1.86	22.5	58.5	
100	1.67	25	65.0	109.3
110	1.57	27.5	71.5	
120	1.37	30	78.0	
125	1.34	31.25	81.3	
130	1.27	32.5	84.5	
140	1.18	35	91.0	
150	1.08	37.5	97.5	
30	6.96	7.5	19.5	
35	5.98	8.75	22.8	
40	5.29	10	26.0	
45	4.70	11.25	29.3	
50	4.21	12.5	32.5	
55	3.82	13.75	35.8	
60	3.53	15	39.0	
65	3.23	16.25	42.3	
70	3.04	17.5	45.5	
75	2.84	18.75	48.8	136.6
80	2.55	20	52.0	
90	2.35	22.5	58.5	
100	2.06	25	65.0	
110	1.86	27.5	71.5	
120	1.76	30	78.0	
125	1.67	31.25	81.3	
130	1.57	32.5	84.5	
140	1.47	35	91.0	
150	1.37	37.5	97.5	
175	1.18	43.75	113.8	
200	1.08	50	130.0	
35	8.79	8.8	22.8	
40	7.74	10	26.0	
45	6.86	11.25	29.3	
50	6.17	12.5	32.5	
55	5.59	13.75	35.8	
60	5.10	15	39.0	
65	4.70	16.25	42.3	
70	4.41	17.5	45.5	
75	4.12	18.75	48.8	
80	3.82	20	52.0	
90	3.43	22.5	58.5	
100	2.84	25	65.0	
110	2.84	27.5	71.5	200.3
120	2.55	30	78.0	
125	2.45	31.25	81.3	
130	2.35	32.5	84.5	
140	2.16	35	91.0	
150	2.06	37.5	97.5	
160	1.96	40	104.0	
170	1.81	42.5	110.5	
175	1.76	43.75	113.8	
180	1.67	45	117.0	
190	1.62	47.5	123.5	
200	1.57	50	130.0	
250	1.27	62.5	162.5	
300	0.98	75	195.0	

型号	内径	弹簧常数	a	使用方法
代码 D L d	N/mm	压紧长度 Fmm	负载N	F=L×65%
40	11.32	10	26.0	
45	10.06	11.3	29.3	
50	9.05	12.5	32.5	
55	8.23	13.8	35.8	
60	7.54	15	39.0	
65	6.96	16.3	42.3	
70	6.47	17.5	45.5	
75	6.03	18.8	48.8	
80	5.66	20	52.0	
90	5.03	22.5	58.5	
100	4.53	25	65.0	
110	4.11	27.5	71.5	294.2
120	3.77	30	78.0	
130	3.48	32.5	84.5	
140	3.23	35	91.0	
150	3.02	37.5	97.5	
160	2.83	40	104.0	
170	2.66	42.5	110.5	
180	2.51	45	117.0	
190	2.38	47.5	123.5	
200	2.26	50	130.0	
225	2.01	56.3	146.3	
250	1.81	62.5	162.5	
275	1.65	68.8	178.8	
300	1.51	75	195.0	
50	12.07	12.5	32.5	
60	10.06	15	39.0	
70	8.62	17.5	45.5	
80	7.54	20	52.0	
90	6.71	22.5	58.5	
100	6.03	25	65.0	
110	5.49	27.5	71.5	
120	5.03	30	78.0	
130	4.64	32.5	84.5	
140	4.31	35	91.0	392.3
150	4.02	37.5	97.5	
160	3.77	40	104.0	
170	3.55	42.5	110.5	
180	3.35	45	117.0	
190	3.18	47.5	123.5	
200	3.02	50	130.0	
225	2.68	56.3	146.3	
250	2.41	62.5	162.5	
275	2.19	68.8	178.8	
300	2.01	75	195.0	

代码	型号	内径
D	L	d
YSWY	D11	7

YSWY—D11—L20

数量	1~9	10~
价格	100%	另行报价

未税价(元)

交货期
3