


卡扣式圆形连接器

后螺母插座 防水型 锌合金

代码	类型	连接方式	材质			表面处理	
			外壳	绝缘体	接触体	外壳	接触体
ZIX76	防水型 后螺母插座	卡扣连接	锌合金	热塑塑料PPS (耐高温260°C)	铜	镀铬	镀金

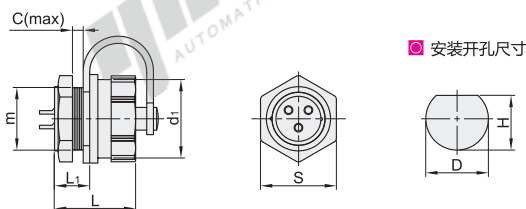

安装开孔尺寸

视角标准：第一视角

型号		规格	芯数	端头	m	d ₁	C	L ₁	L	S	D	H	额定电流 (A)	工作电压 (V)	耐压 (V)	接触电阻 (MΩ)	绝缘电阻 (MΩ)	适配插头代码																		
ZIX76	ZM (后螺母插座)		2	J(插针) K(插孔)															ZIX49																	
			3																																	
			4																																	
			16																	5	M16×1	18			9.7	22	21.2	15.9	15.3		10	AC500	AC1500	2.5		
			7																	5											5			5		
			9																	5											5	AC400	AC1200			
			10																	5																
			2																	5																
			3																	5												25			1	
			4																	5																
			20																	5	M20×1	22			9.9		25.5	19.9	19.3		10	AC500	AC1500	2.5		
			6																	5											5,25			5		
			7																	5											10			2.5		
			9																	5											5	AC400	AC1200	5		
			12																	5																
			24																	12	M24×1	26			10	23	29.2	23.9	23.2		10	AC500	AC1500	2.5		
			19																	5											5	AC400	AC1200	5		
			7																	25															1	
			12																	5																
			16																	10												10	AC500	AC1500	2.5	
			28																	17	M28×1	30			10.2		33.3	27.7	26.9							
			20																	5												5	AC400	AC1200	5	
			24																	5																
			26																	5																



请按图示订货

型号				
代码	外壳形状	规格	芯数	端头
ZIX76	ZM	16	4	J(插针) K(插孔)

ZIX76—ZM—16—4—K

性能表

连接方式	卡扣连接
接线方式	焊接
接插次数	500次
温度范围	-40°C~+85°C
防护等级	IP67